




LAYOUT FOR SLOPES
1:2 OR FLATTER

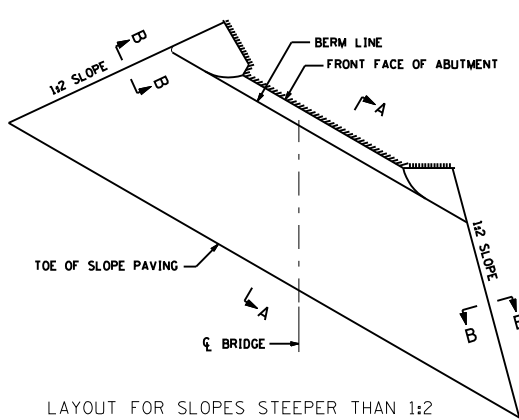

LAYOUT FOR SLOPES STEEPER THAN 1:2

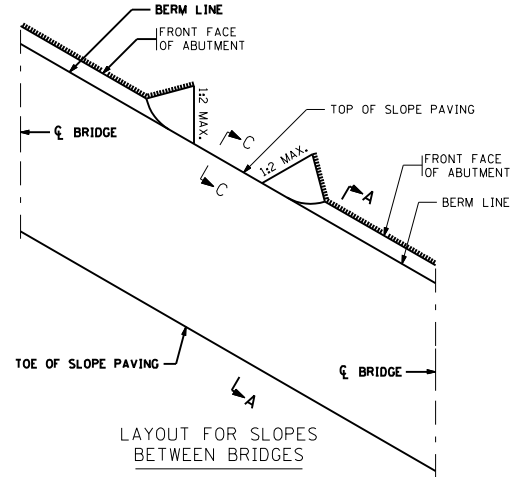


LAYOUT FOR SLOPES
BETWEEN BRIDGES

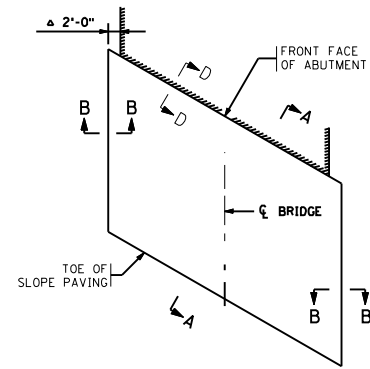


LAYOUT FOR SLOPES
AT HIGH ABUTMENTS


▲ 2'-0" FOR TANGENT BRIDGE SUPERSTRUCTURES.
VARIES 2'-0" MINIMUM FOR CURVED BRIDGE
SUPERSTRUCTURES.

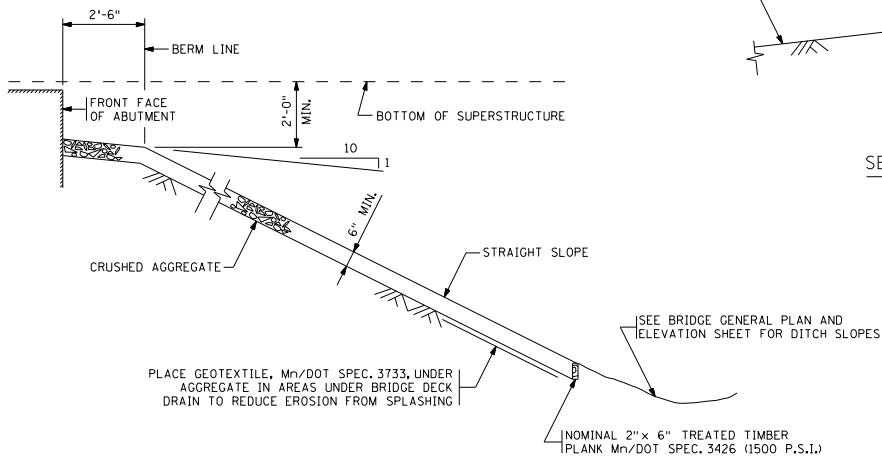


SECTION A-A

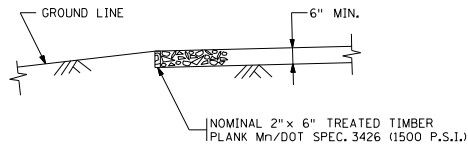

SECTION B-B



SECTION D-D
HIGH ABUTMENTS



SECTION C-C

GENERAL NOTE
SLOPES ARE EXPRESSED AS A RATIO OF
VERTICAL DISTANCE: HORIZONTAL DISTANCE.

REVISION:
APPROVED: SEPTEMBER 26, 2003
<i>David A. Peterson</i> STATE BRIDGE ENGINEER

CERTIFIED BY	DATE
LICENSED PROFESSIONAL ENGINEER	
NAME:	LIC. NO.

TITLE:
STABILIZED AGGREGATE SLOPE PAVING UNDER BRIDGES

DESIGNED BY	DRY	APPROVED:
CHECKED BY	CHK	
SHEET NO.	OF	SHEETS

FIG. 5-397.302
BRIDGE NO.