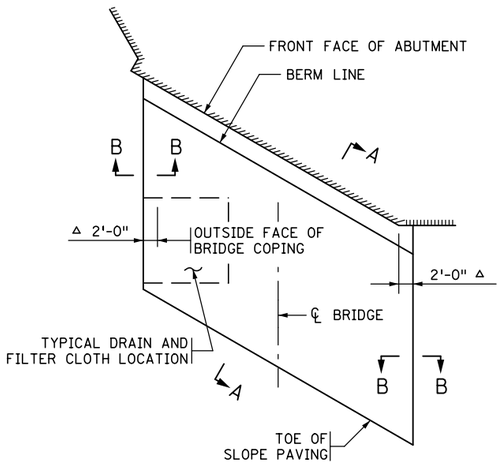

LAYOUT FOR SLOPES 1:2 OR FLATTER

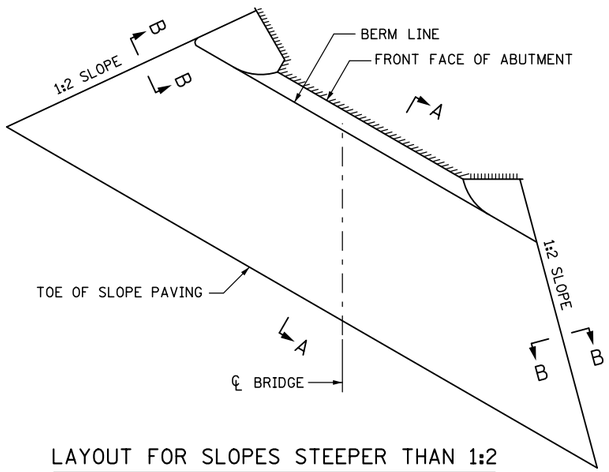

LAYOUT FOR SLOPES STEEPER THAN 1:2

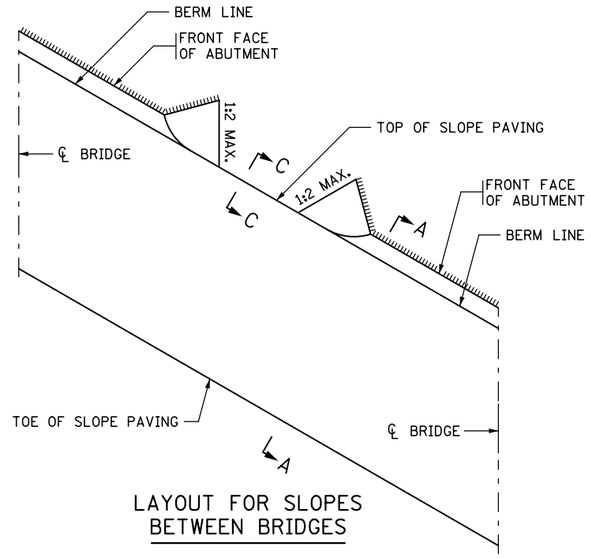

LAYOUT FOR SLOPES BETWEEN BRIDGES

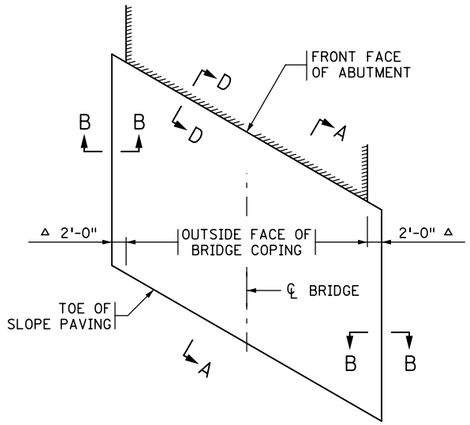

LAYOUT FOR SLOPES AT HIGH ABUTMENTS

△ 2'-0" FOR TANGENT BRIDGE SUPERSTRUCTURES. VARIES 2'-0" MINIMUM FOR CURVED BRIDGE SUPERSTRUCTURES.

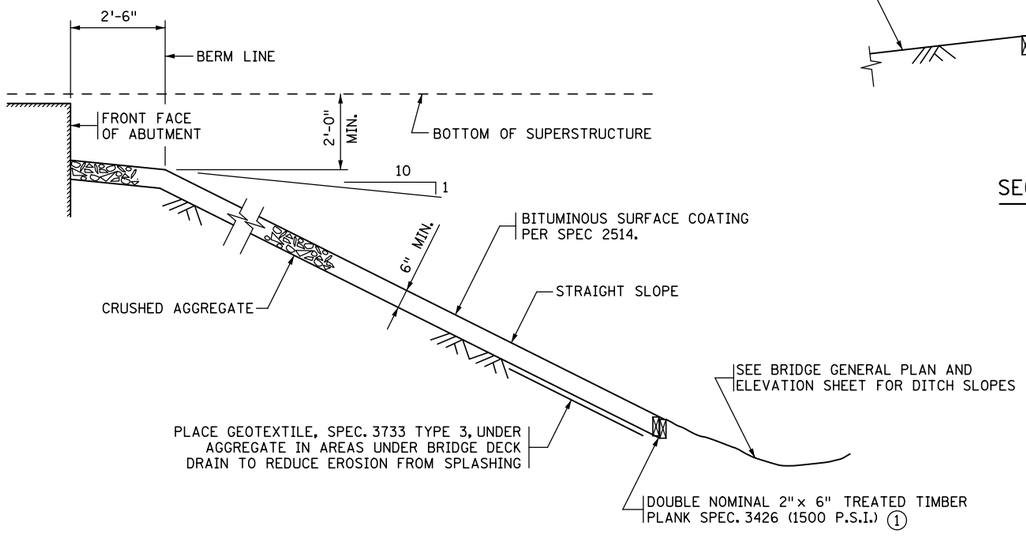

SECTION A-A

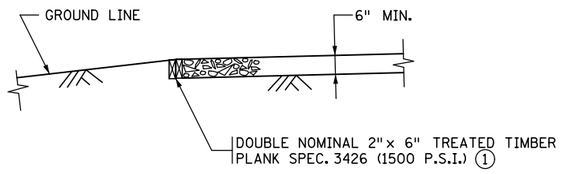

SECTION B-B



SECTION D-D

HIGH ABUTMENTS

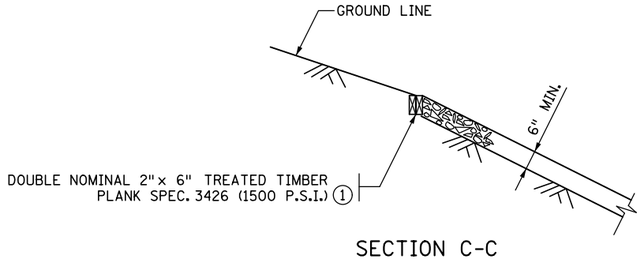

SECTION C-C

GENERAL NOTES

SLOPES ARE EXPRESSED AS A RATIO OF VERTICAL DISTANCE: HORIZONTAL DISTANCE.

REFER TO SPECIFICATION 2514 FOR ADDITIONAL INFORMATION.

(1) PRESERVATIVE TREATMENT PER SPEC. 3491, TABLE 3491-1, PRODUCT AND USAGE CATEGORY E2, AWPA USE CATEGORY UC4B. REFER TO MNDOT APPROVED PRODUCTS LIST.

REVISION: 09-11-2014

APPROVED: SEPTEMBER 26, 2003

STATE BRIDGE ENGINEER

CERTIFIED BY _____ LICENSED PROFESSIONAL ENGINEER _____ DATE

NAME: LIC. NO.

TITLE: STABILIZED AGGREGATE SLOPE PAVING UNDER BRIDGES

DES: DR: CHK: CHK:

APPROVED:

FIG. 5-397.302

BRIDGE NO.

SHEET NO. OF SHEETS