

END VIEW
 ** DIMENSION SHOWN IS TO THE TOP OF THE WEARING COURSE AT GUTTERLINE.

DESIGNER NOTE
 (REMOVE PRIOR TO PLOTTING FINAL PLAN):
 MINIMUM BARRIER LENGTH ON APPROACH PANEL IS 10'-8" WITH MINIMUM OF 22 R502E AND R503E DOWELS WITH ACCOMPANYING APPROPRIATE BARRIER VERTICAL BARS, 12" MAX. SPACING. VERIFY APPROACH BARRIER LENGTH, NEED FOR A GUARDRAIL CONNECTION, AND VERTICAL TAPER WITH ROADWAY DESIGNER. REFER TO MEMO TO DESIGNERS (2016-01) FOR ADDITIONAL REQUIREMENTS REGARDING BARRIER PLACEMENT.









JOINT AT ABUTMENT
 (INTEGRAL OR SEMI-INTEGRAL ABUTMENT)
CONTROL JOINT

INSIDE ELEVATION OF BARRIER
 CONCRETE WEARING COURSE NOT SHOWN



BARRIER MEETS NCHRP 350 TL-4 REQUIREMENTS ON BRIDGE DECK AND TL-3 ON APPROACH PANEL.

BILL OF REINFORCEMENT FOR BARRIER

BAR	NO.	LENGTH	SHAPE	LOCATION
R501E		5'-4"		BARRIER DOWEL
R502E		5'-6"		BARRIER DOWEL
R503E		5'-5"		BARRIER DOWEL
R504E		7'-5"		BARRIER VERTICAL
R505E	-- SER. OF 4	6'-11" TO 7'-3"		BARRIER VERTICAL
R506E		6'-9"		BARRIER VERTICAL
R407E		10'-3"		BARRIER LONGIT.
R4__E				BARRIER LONGIT.
R4__E				BARRIER LONGIT.
R4__E				BARRIER LONGIT.
R4__E				BARRIER LONGIT.

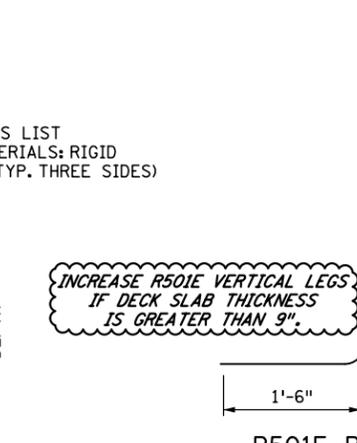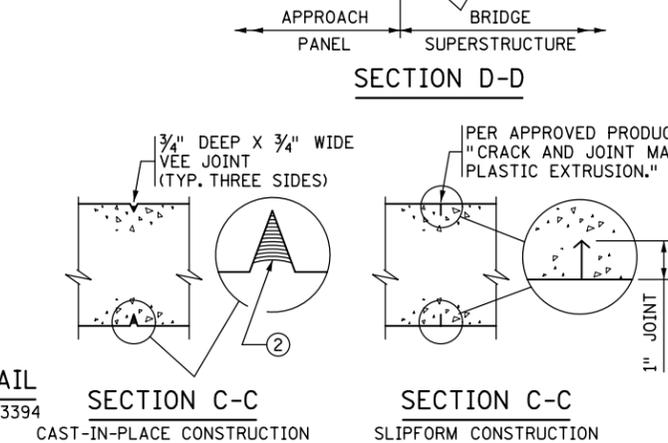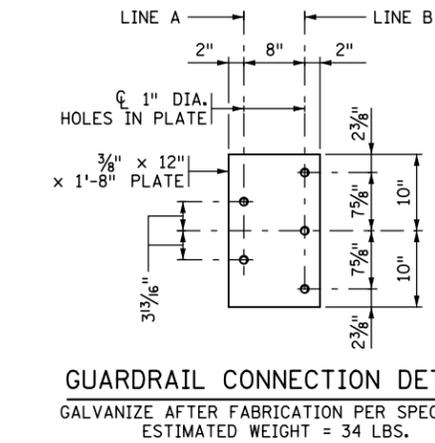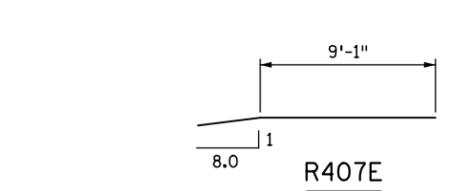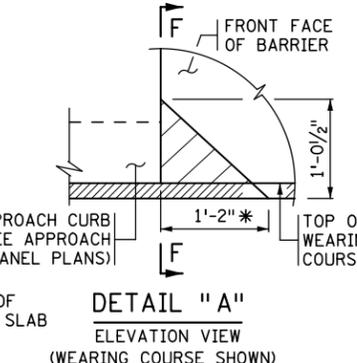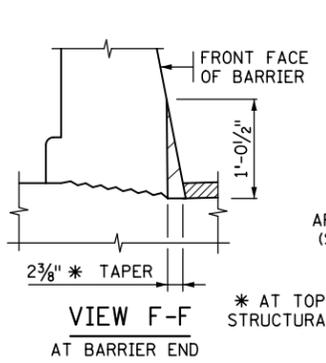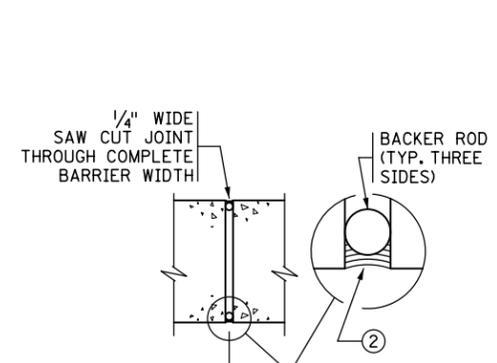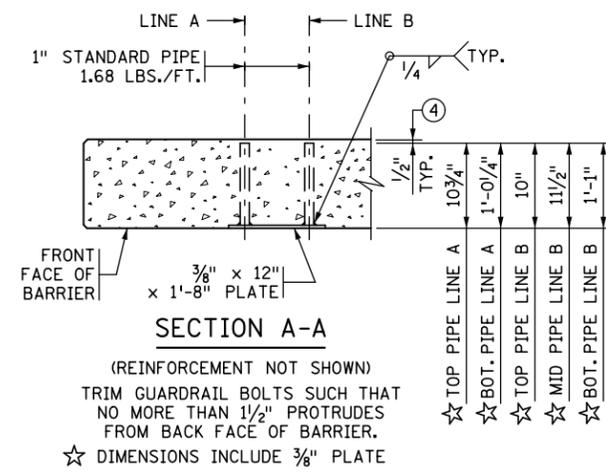

INCREASE R501E VERTICAL LEGS IF DECK SLAB THICKNESS IS GREATER THAN 9".

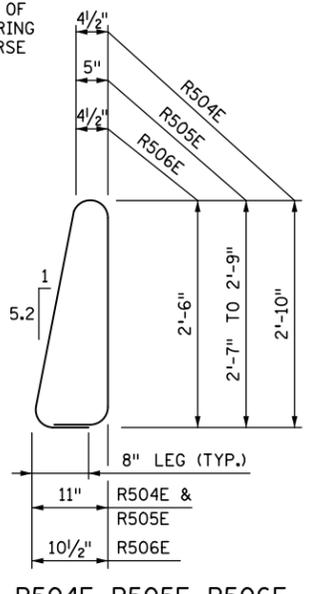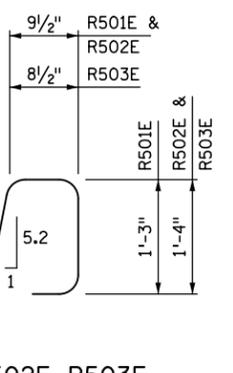

GENERAL NOTES

- MEASURE PAYMENT LENGTH BETWEEN THE OUTSIDE ENDS OF THE BARRIER.
- CONCRETE BARRIER = 500 LBS./FT. (0.123 CU. YDS./FT.)
- FINISH ALL EDGES OF BARRIER WITH 1/2" CHAMFER, EXCEPT WHERE OTHERWISE NOTED.
- SPACE CONTROL JOINTS AT 10 FT. MAXIMUM. REFER TO SUPERSTRUCTURE SHEET FOR SPECIFIC SPACING INFORMATION.
- GUARDRAIL CONNECTION TO BE STRUCTURAL STEEL, SPEC. 3306.
- GUARDRAIL CONNECTION AND NAME PLATE TO BE CONSIDERED INCIDENTAL TO BARRIER.
- BARRIER QUANTITIES ARE LISTED IN SUMMARY OF QUANTITIES FOR SUPERSTRUCTURE.
- ① PLACE BAR ON TOP OF BOTTOM REINFORCEMENT MAT IN DECK.
- ② JOINT SEALANT PER MnDOT APPROVED/QUALIFIED PRODUCTS LIST - CRACK AND JOINT MATERIALS - SILICONE JOINT SEALERS.
- ③ DIMENSIONS TO BE DETERMINED BASED ON THE BRIDGE DECK SLOPE.
- ④ REMOVE CONCRETE FROM PIPE ENDS AFTER SLIPFORMING OR FORM REMOVAL.

REVISION: MAY 10, 2017
 APPROVED: AUGUST 24, 2016
 Kevin Weston
 STATE BRIDGE ENGINEER

CONTROL JOINT DETAILS
 FOR SLIPFORM CONSTRUCTION: IMMEDIATELY AFTER CONCRETE IS PLACED AND WHILE IT IS STILL WET, CREATE A ONE INCH STRAIGHT GROOVE USING A TROWEL. INSERT RIGID PLASTIC EXTRUSION INTO GROOVE TO A DEPTH 1/8" BELOW THE SURFACE; FINISH OVER GROOVE COMPLETELY HIDING THE EXTRUSION.

CERTIFIED BY _____
 LICENSED PROFESSIONAL ENGINEER DATE _____
 NAME: _____ LIC. NO. _____

TITLE: **CONCRETE BARRIER 36" (TYPE S, TL-4)**
 INTEGRAL OR SEMI-INTEGRAL ABUTMENT WITH BRIDGE SLAB SIDEWALK AND GUARDRAIL CONNECTION (WITH 2" CONCRETE WEARING COURSE)

DES: _____ DR: _____
 CHK: _____ CHK: _____
 APPROVED: _____
 SHEET NO. OF SHEETS _____
 BRIDGE NO. _____

FIG. 5-397.138(D)