
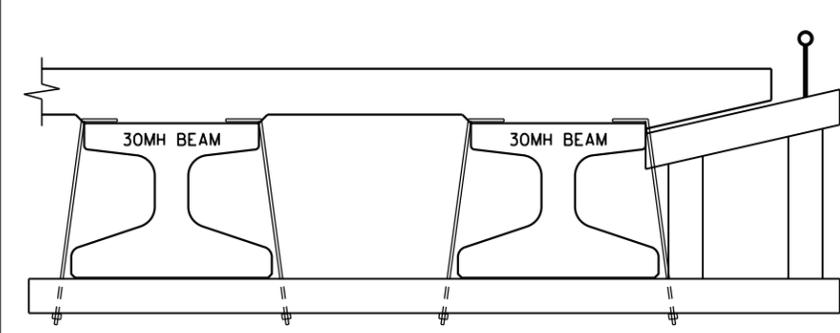


Y DISTANCES (INCHES)			
	NO.	CL SPAN	END
STRAIGHT STRANDS	----	----	----
DRAPED STRANDS	----	----	----
TOTAL STRANDS	----	----	----



Y = DISTANCE TO CENTER OF GRAVITY OF STRANDS FROM BOTTOM OF BEAM. ALL STRANDS SPACED 2" CENTER TO CENTER, HORIZONTALLY AND VERTICALLY, EXCEPT AS NOTED.

A TOLERANCE OF ± 1" WILL BE PERMITTED IN THIS DIMENSION.

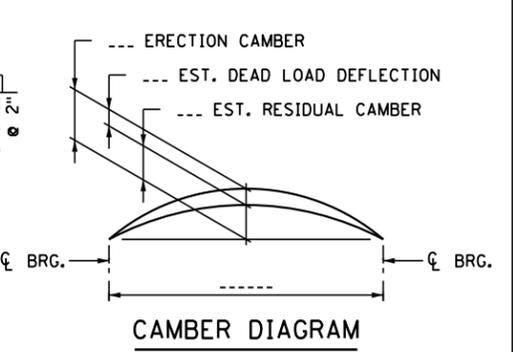

CONTRACTOR SHALL VERIFY STABILITY OF FASCIA BEAMS FROM OVERTURNING (NO PERMANENT BEAM DIAPHRAGMS ARE PRESENT). CONTRACTOR SHALL PROVIDE TEMPORARY BRACING.



TEXT IN ITALICS ARE DESIGNER NOTES. REMOVE PRIOR TO PLOTTING FINAL PLAN.

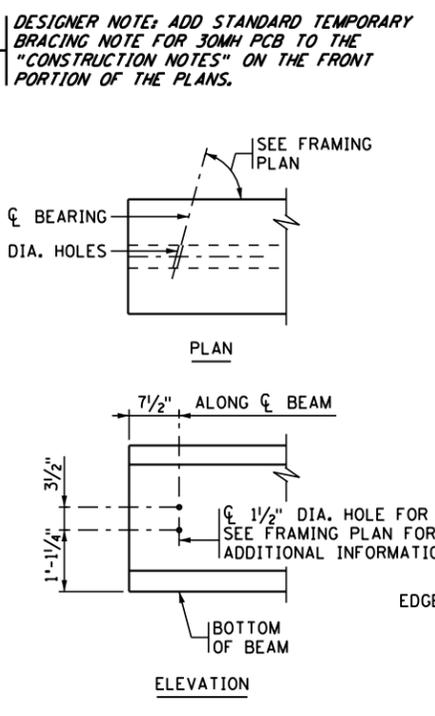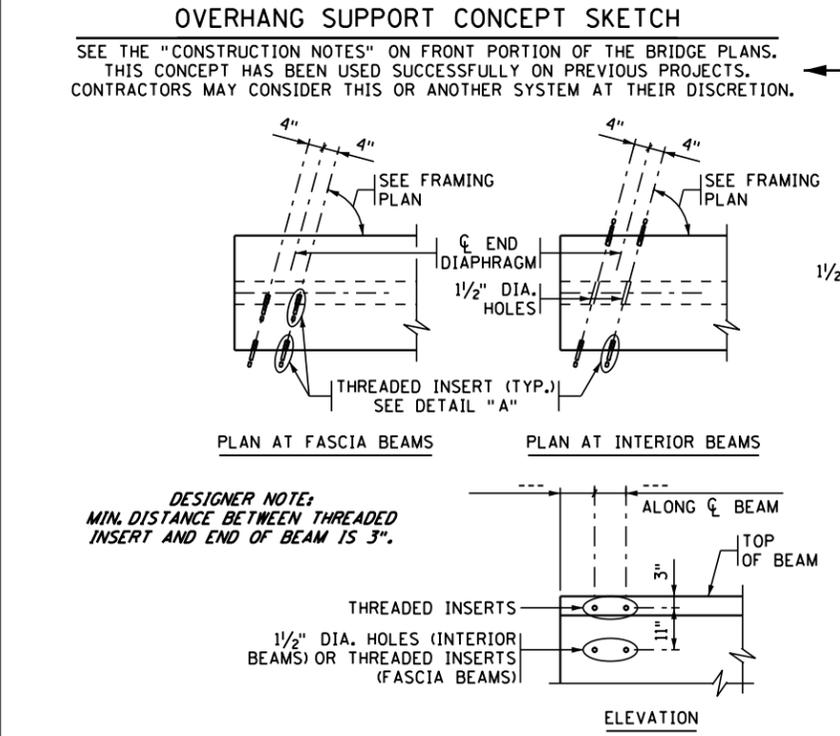

CALCULATED PRESTRESS LOSSES	
ELASTIC SHORTENING LOSS	--- KSI
LONG TERM LOSSES	--- KSI
TOTAL LOSSES	--- KSI

MINIMUM CONCRETE STRENGTH - KSI	
① f'c1	② f'c
--- KSI	--- KSI

DESIGNER NOTE: INDICATE MIN. REQUIRED CONCRETE STRENGTH. ROUND CONCRETE STRENGTH TO ONE TENTH KSI.

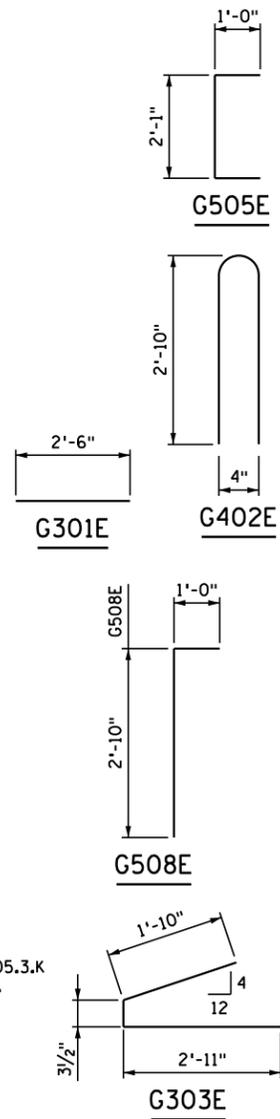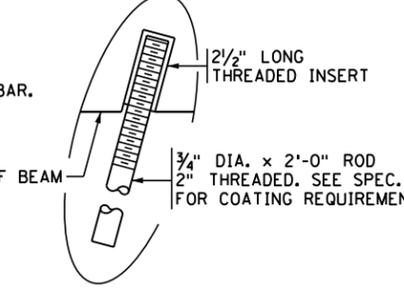

GENERAL NOTES

- PROVIDE HANDLING HOOKS OR DEVICES AS REQUIRED BY CONTRACTOR.
- MARK EACH BEAM SHOWING BRIDGE NUMBER, CASTING DATE, AND INDIVIDUAL IDENTIFICATION LETTERS AND NUMBERS ON THE FACE OF THE BEAM, NEAR THE END, SO LOCATED THAT THEY WILL BE EXPOSED AFTER THE END DIAPHRAGMS HAVE BEEN CAST. MARK FASCIA BEAMS ON THE INSIDE FACE. ENSURE ALL MARKINGS ARE STENCILED AND CLEARLY LEGIBLE. FOR LOCATION OF BEAMS, SEE FRAMING PLAN.
- ALL MATERIAL AND WORK SHOWN OR NOTED ON THIS SHEET IS INCLUDED IN UNIT PRICE BID FOR PRESTRESSED CONCRETE BEAMS. SEE SPEC. 2405.
- SEE FRAMING PLAN FOR BEAM END MARKED "X".
- AS AN ALTERNATE TO THE END DIAPHRAGM ANCHORAGES SHOWN, THE CONTRACTOR MAY SUBMIT DETAILS OF A CAST-IN-PLACE ANCHORAGE TO THE ENGINEER FOR APPROVAL. ANCHORAGE MUST PROVIDE AN ULTIMATE PULL OUT STRENGTH OF 15 KIPS PER ANCHORAGE.
- APPLY AN APPROVED SEALER TO THE SIDES OF THE BEAM NEAR EACH END PER THE SPECIAL PROVISIONS.
- ① MINIMUM CONCRETE STRENGTH AT TIME OF PRESTRESS TRANSFER.
- ② MINIMUM CONCRETE STRENGTH WHEN BEAM CAN BE TRANSPORTED AND INSTALLED.
- ③ DRAPED STRANDS.
- ④ STRAIGHT STRANDS.
- ⑤ USE 0.6" DIA. 7-WIRE LOW RELAXATION PRESTRESSING STRAND, CONFORMING TO ASTM A416, GRADE 270.
- ⑥ CENTER OF GRAVITY OF HOLD DOWNS WHEN MULTIPLE HOLD DOWNS ARE USED.
- ⑦ TWO INSIDE BARS MAY BE PLACED ADJACENT TO VERTICAL STIRRUP FOR TYING CONVENIENCE.
- ⑧ STEEL TROWEL TO SMOOTH FINISH AND APPLY BOND BREAKER PER APPROVED PRODUCTS LIST.
- ⑨ ROUGH FLOAT AND BROOM TRANSVERSELY FOR BOND PER SPEC. 2405.3.D.
- ⑩ TYP. CLR. DISTANCE FOR ENTIRE BOTTOM FLANGE.

REVISED: OCTOBER 22, 2019  
 APPROVED: DECEMBER 20, 2018  
 Kevin Westrom  
 STATE BRIDGE ENGINEER

CONCRETE END DIAPHRAGM  
 PARAPET ABUTMENT  
 (SEE DETAIL B814 FOR DIAPHRAGM DETAILS)

INTEGRAL & SEMI-INTEGRAL ABUTMENT.  
 SEE SUPERSTRUCTURE DETAILS AND REINFORCEMENT FOR DIAPHRAGM DETAILS.

CERTIFIED BY \_\_\_\_\_ DATE \_\_\_\_\_  
 LICENSED PROFESSIONAL ENGINEER  
 NAME: \_\_\_\_\_ LIC. NO. \_\_\_\_\_

TITLE: 30MH PRESTRESSED CONCRETE BEAM (PRETENSIONED) 30MH-

FIG. 5-397.501  
 APPROVED: \_\_\_\_\_  
 BRIDGE NO. \_\_\_\_\_  
 SHEET NO. OF SHEETS