
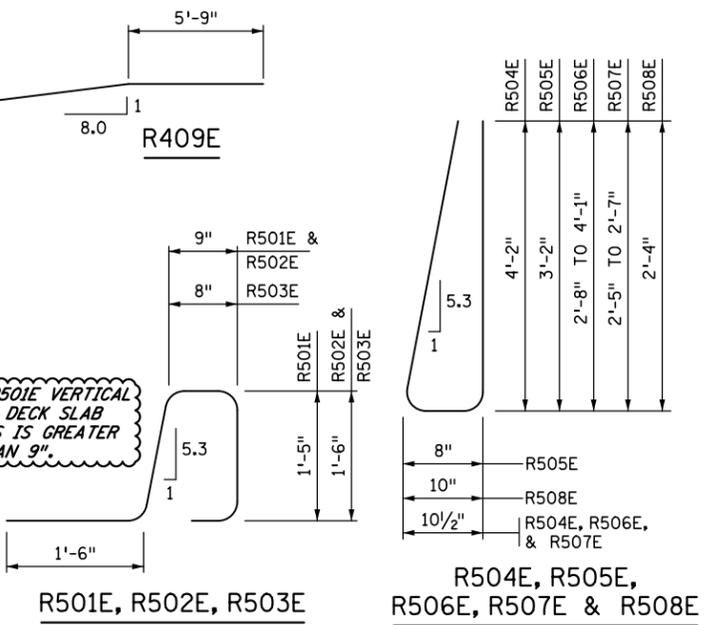
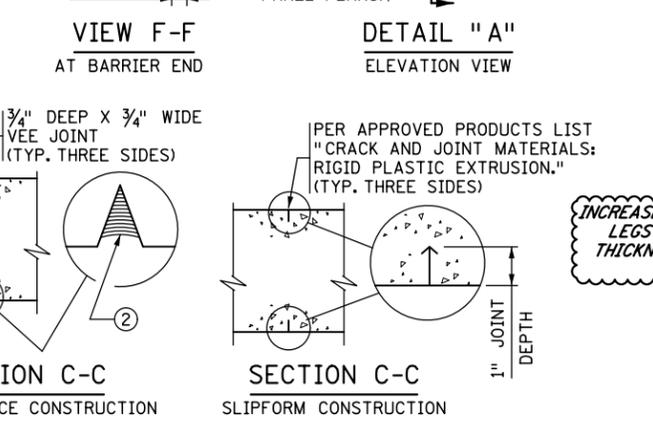
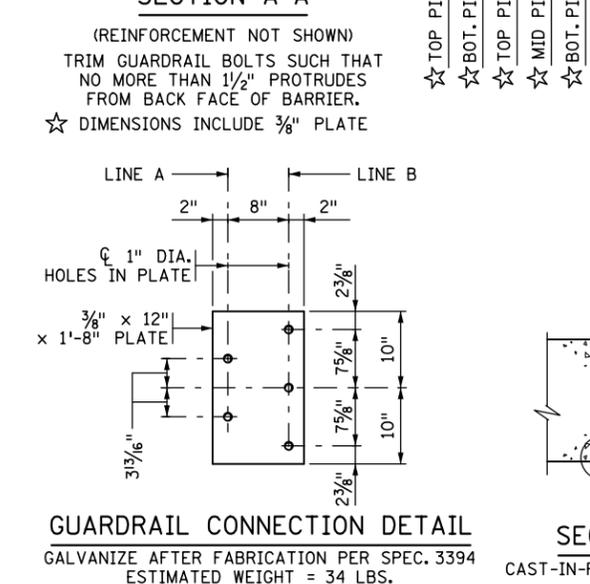
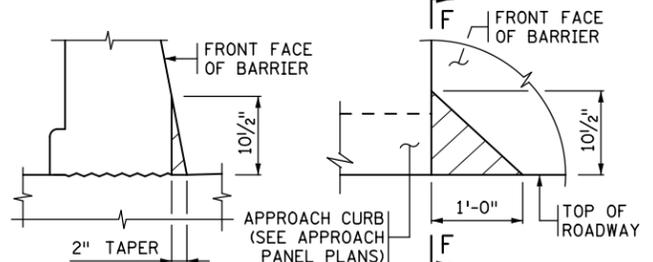


**DESIGNER NOTE**  
 (REMOVE PRIOR TO PLOTTING FINAL PLAN)  
 MINIMUM BARRIER LENGTH ON APPROACH PANEL IS 16'-8" WITH MINIMUM OF 22 R502E AND R503E DOWELS WITH ACCOMPANYING APPROPRIATE BARRIER VERTICAL BARS, 12" MAX. SPACING. VERIFY APPROACH BARRIER LENGTH, NEED FOR A GUARDRAIL CONNECTION, AND VERTICAL TAPER WITH ROADWAY DESIGNER. REFER TO MEMO TO DESIGNERS (2016-01) FOR ADDITIONAL REQUIREMENTS REGARDING BARRIER PLACEMENT.

BARRIER MEETS NCHRP 350 TL-4 REQUIREMENTS ON BRIDGE DECK AND TL-3 ON APPROACH PANEL.

BILL OF REINFORCEMENT FOR BARRIER				
BAR	NO.	LENGTH	SHAPE	LOCATION
R501E		5'-7"		BARRIER DOWEL
R502E		5'-9"		BARRIER DOWEL
R503E		5'-8"		BARRIER DOWEL
R504E		9'-2"		BARRIER VERTICAL
R505E		7'-0"		BARRIER VERTICAL
R506E	-- SER. OF 12	6'-3" TO 9'-1"		BARRIER VERTICAL
R507E	-- SER. OF 4	5'-9" TO 6'-1"		BARRIER VERTICAL
R508E		5'-6"		BARRIER VERTICAL
R409E		13'-0"		BARRIER LONGIT.
R410E		7'-7"		BARRIER LONGIT.
R4_E				BARRIER LONGIT.
R4_E				BARRIER LONGIT.
R4_E				BARRIER LONGIT.
R4_E				BARRIER LONGIT.

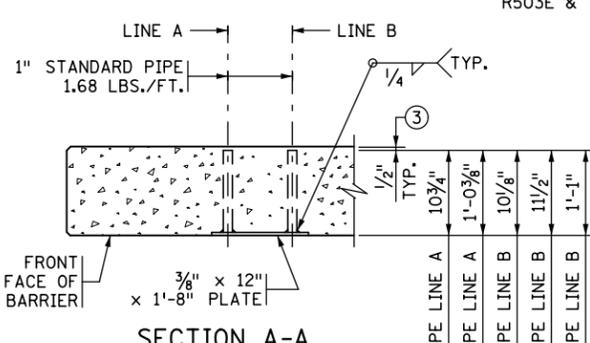

**GENERAL NOTES**

- MEASURE PAYMENT LENGTH BETWEEN THE OUTSIDE ENDS OF THE BARRIER.
- CONCRETE BARRIER = 624 LBS./FT. (0.154 CU. YDS./FT.)
- FINISH ALL EDGES OF BARRIER WITH 1/2" CHAMFER, EXCEPT WHERE OTHERWISE NOTED.
- SPACE CONTROL JOINTS AT 10 FT. MAXIMUM. REFER TO SUPERSTRUCTURE SHEET FOR SPECIFIC SPACING INFORMATION.
- GUARDRAIL CONNECTION TO BE STRUCTURAL STEEL, SPEC. 3306.
- GUARDRAIL CONNECTION AND NAME PLATE TO BE CONSIDERED INCIDENTAL TO BARRIER.
- BARRIER QUANTITIES ARE LISTED IN SUMMARY OF QUANTITIES FOR SUPERSTRUCTURE.
- ① PLACE BAR ON TOP OF BOTTOM REINFORCEMENT MAT IN DECK.
- ② JOINT SEALANT PER MnDOT APPROVED/QUALIFIED PRODUCTS LIST - CRACK AND JOINT MATERIALS - SILICONE JOINT SEALERS.
- ③ REMOVE CONCRETE FROM PIPE ENDS AFTER SLIPFORMING OR FORM REMOVAL.
- ④ REFER TO "WATERPROOF EXPANSION DEVICE" STANDARD PLANS FOR COVER PLATE DETAILS.