

CRANES

Liftmoore Cranes

Vendor Name:	Bert's Truck Equipment, Inc
Contact Person:	Jim McLaughlin
Street Address:	3804 Hwy 75 North
P.O. Box:	PO 336
City, State, Zip:	Moorhead, MN 56560
Phone #:	218-233-8681
Toll Free #:	800-232-3787
Fax #:	218-233-9548
Email Address:	jimmc@bertsonline.com
Website:	www.bertsonline.com or www.liftmoore.com

PRICING METHOD 2 - PERCENTAGE DISCOUNT OFF LIST

1.0	CRANE/MAKE	Liftmoore Cranes
	Warranty	12 Months
	Percentage Discount to be applied to Price List	0
		None
	Date & Price List I.D. Number	July 29th, 2018
2.0	OPTIONS (If not included in list)	See Price Schedule
3.0	EXTENDED WARRANTY OPTIONS	
4.0	DELIVERY CHARGES	
	DELIVERY STARTING POINT - City, State, Zip	Moorhead MN 56560
	Price per loaded mile	\$ 2.00
5.0	DISCOUNT OFF LIST PRICE FOR RELATED PARTS AND ACCESSORIES	
	% Discount	None
	Price List Date and Number	July 29th, 2018
6.0	HOURLY SHOP RATE (Per Hour)	
6.1	EQUIPMENT INSPECTION AND REPAIR	\$ 110.00
6.2	HOURLY RATE FOR INITIAL INSPECTION/DIAGNOSTIC	\$ 110.00
6.3	HOURLY RATE FOR MECHANICAL REPAIRS	\$ 110.00

Liftmoore, Inc.

CRANE PRICE LIST

**Contact Liftmoore for Special Applications & Boom Lengths
This list is comprised of our Standard Units only.**

Visit our website at www.liftmoore.com for specifications on the complete Liftmoore line of cranes and accessories.

Hydraulics Systems and Installation of Cranes

Hot Shift PTO	Hydraulic System with hot shift PTO, Reservoir, filter, Fitting, Hydraulic Oil, etc	\$ 3,395.00
Hot Shift PTO, multi- hydraulic sections	Hydraulic system with 3 section add-a-fold valve, for Crane & Out Riggers and two Additionl Sections for auxiliary items, VT15 Reservoir (Includes wireless Controls)	\$ 8,560.00
Standard PTO	Hydraulic System with standard PTO (manual Transmission, Reservoir, filter, Fitting, Hydraulic Oil, etc	\$ 2,775.00
Labor	Installtion of standard hydraulic Sytems	\$ 915.00
Labor	Installation of Add-A fold multi valve Hydraulic systems	\$ 1,355.00
Flat Rate	Hourly Labor Flat Rate	\$ 110.00

Crane Installation Charges		
	Liftmoore Cranes L-Series Models In Pick-up Box Applications	\$ 1,355.00
	Materials to reinforce under Pick up box or flatbed	\$ 250.00
	Liftmoore Electric Models 2000 – 6000 Models	\$ 805.00
	Jack stands	\$ 110.00
	Manual out/down outriggers	\$ 440.00
	Electric/hydraulic outriggers	\$ 880.00

	Liftmoore Hydraulic Crane Models (does not include Hydraulics)	\$ 915.00
	Jack stands	\$ 110.00
	Manual out/down outriggers	\$ 440.00
	Electric/hydraulic outriggers	\$ 880.00

Cost per mile for pick-up or Delivery to or from Moorhead, MN \$ 2.00
 (Maximum charge per unit for pick-up/delivery one way \$ 400.00)

12V D. C. POWERED ELECTRIC CRANES

MODEL L-8

SPECIFICATIONS

4,500 Ft.-Lbs. Moment Rating
 Maximum Capacity 800 Lbs. at all Load Radii
 Planetary Gear Winch with Permanent Magnet Motor
 On / Off 12 Volt electric control system
 Remote Pendant Control 12.5 Ft. (removable)
 Galvanized Aircraft Cable 3/16" x 25 Ft. (4,200 Lbs. Breaking Strength)
 Down haul pickle weight
 Manual Rotation 360 Degree - Tapered Roller Bearings for ease of movement
 with a Manual Band Brake to control swing
 4 Fixed Boom Elevations ranging from 0 to 75 Degrees
 Stows vertically for travel
 Boom Extension - Manual from 3 Ft. to 5 Ft.

NOTE : ANTI TWO-BLOCK NOT OFFERED ON THIS MODEL

Mounting plate is 12" square with a 9.5" square bolt pattern

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Mounting Bolts Grade 8: 0.50" x 2.75" (Four)
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer must assure the vehicle can maintain an appropriately level condition
 when the crane is in use under load.

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 Jackstand to provide stability and an appropriately level condition
 Minimum Vehicle GVWR of 6,100 Lbs.

Model / Item No.		Bert's Contract
<p>L-8 39005</p>	<p>Pedestal Standard Height = 47.3" from base to point of rotation WEIGHT: Shipping 405 lbs. Actual 240 lbs.</p>	<p>\$2,164.00</p>
<p>L-8S 39044</p>	<p>Same as L-8 except pedestal is eliminated and base plate is added for mounting on service body compartment top (the boom does not fold for travel) WEIGHT: Shipping 395 lbs. Actual 158 lbs.</p>	<p>\$2,129.00</p>

12V D. C. POWERED ELECTRIC CRANES

MODEL L-21

SPECIFICATIONS

6,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 3 Ft. Load radius
 Planetary Gear Winch with Permanent Magnet Motor
 On / Off 12 Volt electric control system
 Remote Pendant Control 12.5 Ft. (removable)
 Galvanized Aircraft Cable 3/16" x 25 Ft. (4,200 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Manual Rotation 360 Degree - Tapered Roller Bearings for ease of movement
 with a Manual Band Brake to control swing
 Boom Elevation - Manual at two positions, 20 and 45 Degrees, stows vertically for travel
 Boom Extension - Manual from 3 Ft. to 5 Ft., optional to 7 Ft.
 Optional Anti-Two Block System, needed when used in construction as per
 OSHA 1926.1441(d)(2) & 1926.1416(d)(3)
 Mounting plate is 12" square with a 9.5" square bolt pattern

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Mounting Bolts Grade 8: 0.50" x 2.75" (Four)
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer must assure the vehicle can maintain an appropriately level condition
 when the crane is in use under load.

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 Jackstand to provide stability and an appropriately level condition
 Minimum Recommended Vehicle GVWR 6,100 lbs.

Model / Item No.		Bert's Contract
L-21 38994	Pedestal Standard Height = 42.625" from base to point of rotation Boom length 3' to 5', Manually Extended. ANTI TWO-BLOCK is not offered for Model L-21 WEIGHT: Shipping 450 lbs. Actual 265 lbs.	\$2,726.00
L-21S 38988	Same as L-21 except pedestal is eliminated and base plate is added for mounting on service body compartment top (the boom does not fold for travel) ANTI TWO-BLOCK is not offered for Model L-21S WEIGHT: Shipping 450 lbs. Actual 220 lbs.	\$2,690.00
L-21-7 ATB 39379	Includes ATB, needed when used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) Pedestal Standard Height = 42.625" from base to point of rotation WEIGHT: Shipping 450 lbs. Actual 300 lbs.	\$3,290.00
L-21S-7 ATB 39378	Same as L-21-7 ATB except pedestal is eliminated and base plate is added for mounting on service body compartment top (the boom does not fold for travel) WEIGHT: Shipping 330 lbs. Actual 231 lbs.	\$3,256.00
OPTION:	Remove Anti Two-Block on L-21S-7 (38991) or L-21-7 (38995)	Deduct: (\$330.00)

12V D. C. POWERED ELECTRIC CRANES

MODEL L-21W

SPECIFICATIONS

6,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor: 2,000 lb. single line capacity
 On / Off 12 Volt electric control system
 Remote Pendant Control 12.5 Ft. (removable)
 Galvanized Aircraft Cable 1/4" x 62 Ft. w/ Swivel Hook (7,000 Lbs. Breaking Strength)
 Down haul pickle weight
 Manual Rotation 360 Degree - Tapered Roller Bearings for ease of movement
 with a Manual Band Brake to control swing
 Boom Elevation - Manual at two positions, 20 and 45 Degrees
 Stows vertically for travel
 Boom Extension - Manual from 3 Ft. to 7 Ft.
 Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3)
 Mounting plate is 12" square with a 9.5" square bolt pattern.

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Mounting Bolts Grade 8: 0.50" x 2.75" (Four)
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer must assure the vehicle can maintain an appropriately level condition
 when the crane is in use under load.

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 Jackstand to provide stability and an appropriately level condition
 Minimum Recommended Vehicle GVWR 6,100 lbs.

Model / Item No.		Bert's Contract
L-21W-7 ATB 39314	Includes ATB, needed when used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) WEIGHT: Shipping 520 lbs. Actual 325 lbs.	\$4,098.00
L-21WS-7 ATB 39391	Same as L-21W-7 ATB except pedestal is eliminated and base plate is added for mounting on service body compartment top (the boom does not fold for travel) WEIGHT: Shipping 525 lbs. Actual 318 lbs.	\$4,061.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 2000A

SPECIFICATIONS

6,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor: 2,000 lb. single line capacity
 On / Off 12 Volt electric control system
 Remote Pendant Control 12 Ft. (removable)
 Galvanized Aircraft Cable 1/4" x 62 Ft. w/ swivel hook (7,000 Lbs. Breaking Strength)
 Down haul pickle weight
 Manual Rotation 360 Degree - Tapered Roller Bearings for ease of movement
 with a Manual Band Brake to control swing
 Boom Elevation - Manual with five positions
 Boom Extension - Manual from 5.5 Ft. to 9 Ft.

NOTE : ANTI TWO-BLOCK NOT OFFERED ON THIS MODEL

Mounting plate is 15" square with a 12" square bolt pattern.

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Mounting Bolts Grade 8: 0.50" x 3.00" (Four)
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer must assure the vehicle can maintain an appropriately level condition
 when the crane is in use under load.
 Boom Rest (P.N. 22167) or provision to prevent the crane from rotating when the vehicle is in motion.

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 Jackstand to provide stability and an appropriately level condition
 Minimum Recommended Vehicle GVWR 8,600 lbs.

Model / Item No.		Bert's Contract
2000A	Boom Length 5.5 Ft. to 9 Ft. manually extended	\$3,861.00
39070	No Anti Two-Block offered for Model 2000 WEIGHT: Shipping 450 lbs. Actual 385 lbs.	

12V D. C. POWERED ELECTRIC CRANES

MODEL 206REL

SPECIFICATIONS

6,500 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 3.25 Ft. Load radius
 Planetary Gear Winch with Permanent Magnet Motor
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. (removable)
 Galvanized Aircraft Cable 3/16" x 35 Ft. (4,200 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited on a ball bearing slewing ring
 Boom Elevation - Full Power (0 Deg. To 75 Deg.)
 Boom Extension - Manual from 5.5 Ft. to 9 Ft.
 Overload Protection System
 Optional Anti-Two Block System, needed when used in construction as per OSHA 1926.1441(d)(2) & 1926.1416(d)(3)
 Mounting plate is 12" square with a 9.5" square bolt pattern.

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch
 Mounting Bolts Grade 8: 0.50" x 3.00" (Four)
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer must assure the vehicle can maintain an appropriately level condition when the crane is in use under load.
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 Jackstand to prevent unrestricted twisting of chassis while lifting load.
 Minimum Recommended Vehicle GVWR 8,600 lbs.

Model / Item No.		Bert's Contract
206REL VH ATB 39371	Lower Pedestal Height standard at 22.75" - can be variable height Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) WEIGHT: Shipping 555 lbs. Actual 412 lbs.	\$7,587.00
206RELS ATB 39372	Pedestal is eliminated and base plate added for mounting on service body compartment top Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) WEIGHT: Shipping 520 lbs. Actual 383 lbs.	\$7,402.00
206RELS ATB SP 39373	Pedestal is eliminated and a 15" x 15" base plate is added for mounting on service body compartment top NOTE: This differs from all other Model 206 cranes as it has a 12" x 12" bolt pattern Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) WEIGHT: Shipping 520 lbs. Actual 383 lbs.	\$7,402.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
OPTION:	Remove ATB on 206REL (39214) or RELS (39213) NOTE: Add on wireless control (28492) is not available on cranes with the ATB removed.	Deduct: (\$330.00)

12V D. C. POWERED ELECTRIC CRANES

MODEL 206REL W

SPECIFICATIONS

6,500 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 3.25 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor: 2,000 lb. single line capacity
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. (removable)
 62 Ft. of 1/4" wire rope w/ swivel hook (7,000 Lbs. Capacity Breaking Strength)
 Down haul pickle weight
 Power Rotation - Unlimited on a ball bearing slewing ring
 Boom Elevation - Full Power (0 Deg. To 75 Deg.)
 Boom Extension - Manual from 5.5 Ft. to 9 Ft.
 Overload Protection System
 Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3)
 Mounting plate is 12" square with a 9.5" square bolt pattern.

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch
 Mounting Bolts Grade 8: 0.50" x 3.00" (Four)
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer must assure the vehicle can maintain an appropriately level condition when the crane is in use under load.
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 Jackstand to prevent unrestricted twisting of chassis while lifting load
 Minimum Recommended Vehicle GVWR 8,600 lbs.

Model / Item No.		Bert's Contract
206RELW VH ATB 39404	Lower Pedestal Height standard at 22.75" - can be variable height WEIGHT: Shipping 570 lbs. Actual 468 lbs.	\$8,282.00
206RELWS ATB 39309	Same as 206REL W except Pedestal is eliminated and base plate added for mounting on service body compartment top WEIGHT: Shipping 545 lbs. Actual 428 lbs.	\$8,097.00

12V D. C. POWERED ELECTRIC CRANES

MODEL LA6K

SPECIFICATIONS

6,500 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 3.3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor: 2,000 lb. single line capacity
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. (removable)
 Galvanized Aircraft Cable 7/32" x 40 Ft. with Ball Bearing Swivel Hook
 Ball Bearing allows hook to swivel under load
 Down haul pickle weight
 Power Rotation - Unlimited
 Rotation on a slewing ring, driven by a low speed high torque hydraulic motor
 Boom Elevation - Full Power (-90 Deg. To 70 Deg.)
 Boom Extension - Power 5.5 Ft. - 8.5 Ft.; Manual to 11.5 Ft.
 Counter balance valve (holding valve on both cylinders)
 Overload Protection System
 Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3)
 Mounting plate is 12" square with a 9.5" square bolt pattern.

INCLUDED

Battery Power Cable #4 x 25 Ft.
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,000 lbs.

Model / Item No.		Bert's Contract
LA6K EX-11 39363	Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) WEIGHT: Shipping 820 lbs. Actual 690 lbs.	\$9,692.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00

12V D. C. POWERED ELECTRIC CRANES

MODEL LA10K

SPECIFICATIONS

10,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 5 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor: 2,000 lb. single line capacity
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. (removable)
 Galvanized Aircraft Cable 7/32" x 40 Ft. with Ball Bearing Swivel Hook
 Ball Bearing allows hook to swivel under load
 Down haul pickle weight
 Power Rotation - Unlimited
 Rotation on a slewing ring, driven by a low speed high torque hydraulic motor
 Boom Elevation - Full Power (-70 Deg. To 60 Deg.)
 Boom Extension - Power 5.5 Ft. - 8.5 Ft.; Manual to 11.5 Ft.
 Counter balance valve (holding valve on both cylinders)
 Overload Protection System
 Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3)
 Mounting plate is 15" square with a 12" square bolt pattern.

INCLUDED

Battery Power Cable #1 x 25 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp
 Ground Cable #4 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)

RECOMMENDED

A dedicated battery, Group 31, deep cycle, near the crane is advised.
 12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,000 lbs.

Model / Item No.		Bert's Contract
LA10K EX-11 39377	Includes ATB, needed when crane is used in construction as per 1926.1441(d)(2) & 1926.1416(d)(3) WEIGHT: Shipping 895 lbs. Actual 805 lbs.	\$11,289.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 2700AR

SPECIFICATIONS

8,100 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,700 Lbs. at 3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 62 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Manual 6 Ft. - 14 Ft. in two sections
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 15" square with a 12" square bolt pattern.

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Master Disconnect Switch and Bracket
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,000 lbs.

Model / Item No.		Bert's Contract
2700AR-14 39260	Manual boom extension from 6 Ft. to 14 Ft. in two stages. WEIGHT: Shipping 775 lbs. Actual 608 lbs.	\$8,370.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
2700AR-14 WI 39394	Includes all features of 39260 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$9,493.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 2010REL

SPECIFICATIONS

10,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 5 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor - **MOUNTED ON BOOM**
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 50 Ft. (7,000 Lbs. Breaking Strength)
 Down haul weight with ball bearing swivel hook - single part line application only
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Manual 7 Ft. - 15 Ft. in two sections
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 14" square with a 12" square bolt pattern.
 Digital readout voltmeter / ammeter for monitoring DC supply to the crane

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Ground Cable 1/0 x 5 Ft. Bottom of base plate to ground post of auxiliary battery or appropriate proximity to chassis frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,000 lbs.

Model / Item No.		Bert's Contract
2010REL-15 39442	Manual boom extension from 7 Ft. to 15 Ft. in two stages. WEIGHT: Shipping 780 lbs. Actual 640 lbs.	\$8,610.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
2010REL-15 WI 39439	Includes all features of 39442 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$9,733.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 2010REE

SPECIFICATIONS

10,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 2,000 Lbs. at 5 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor - **MOUNTED ON BOOM**
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 50 Ft. (7,000 Lbs. Breaking Strength)
 Down haul weight with ball bearing swivel hook - single part line application only
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 7 Ft. - 11 Ft.; Manual to 15 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 14" square with a 12" square bolt pattern.
 Digital readout voltmeter / ammeter for monitoring DC supply to the crane

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Ground Cable 1/0 x 5 Ft. Bottom of base plate to ground post of auxiliary battery or appropriate proximity to chassis frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,000 lbs.

Model / Item No.		Bert's Contract
2010REE-15 39434	Power boom extension from 7 Ft. to 11 Ft. with Manual Extension to 15 Ft. WEIGHT: Shipping 845 lbs. Actual 705 lbs.	\$10,368.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
2010REE-15 WI 39437	Includes all features of 39434 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$11,490.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 3200REE

SPECIFICATIONS

10,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 3,200 Lbs. at 3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor
 On / Off 12 Volt Electric
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 62 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 7 Ft. - 11 Ft.; Manual to 15 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 15" square with a 12" square bolt pattern.

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,500 lbs.

Model / Item No.		Bert's Contract
3200REE-15 39245	Power boom extension from 7 Ft. to 11 Ft. with Manual Extension to 15 Ft. WEIGHT: Shipping 865 lbs. Actual 733 lbs.	\$10,368.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
3200REE-15 WI 39384	Includes all features of 39245 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$11,490.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 3612REL

SPECIFICATIONS

12,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 3,600 Lbs. at 3.3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor - **MOUNTED ON BOOM**
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 62 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Manual 7 Ft. - 15 Ft. in two sections
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 14" square with a 12" square bolt pattern.
 Digital readout voltmeter / ammeter for monitoring DC supply to the crane

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Ground Cable 1/0 x 5 Ft. Bottom of base plate to ground post of auxiliary battery or appropriate proximity to chassis frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,500 lbs.

Model / Item No.		Bert's Contract
3612REL-15 39438	Manual boom extension from 7 Ft. to 15 Ft. in two stages. WEIGHT: Shipping 780 lbs. Actual 640 lbs.	\$8,610.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
3612REL-15 WI 39444	Includes all features of 39438 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$9,733.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 3612REE

SPECIFICATIONS

12,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 3,600 Lbs. at 3.3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor - **MOUNTED ON BOOM**
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 62 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 7 Ft. - 11 Ft.; Manual to 15 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 14" square with a 12" square bolt pattern.
 Digital readout voltmeter / ammeter for monitoring DC supply to the crane

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Ground Cable 1/0 x 5 Ft. Bottom of base plate to ground post of auxiliary battery or appropriate proximity to chassis frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,500 lbs.

Model / Item No.		Bert's Contract
3612REE-15 39440	Power boom extension from 7 Ft. to 11 Ft. with Manual Extension to 15 Ft. WEIGHT: Shipping 845 lbs. Actual 705 lbs.	\$10,368.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
3612REE-15 WI 39441	Includes all features of 39440 but also wireless control instead of wired remote control, Capable of Wi-Fi diagnostics through 26684 Tool	\$11,490.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 3612X 9-15

SPECIFICATIONS

12,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 3,600 Lbs. at 3.3 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor - **MOUNTED ON BOOM**
 On / Off 12 Volt electric control system
 Remote Pendant Control 18 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 62 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Full Power 9 Ft. - 15 Ft. in one section
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 14" square with a 12" square bolt pattern.
 Digital readout voltmeter / ammeter for monitoring DC supply to the crane

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Ground Cable 1/0 x 5 Ft. Bottom of base plate to ground post of auxiliary battery or appropriate proximity to chassis frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

12K Outriggers or jackstand for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 10,500 lbs.

Model / Item No.			Bert's Contract
3612X 9-15 39445	Power boom extension from 9 Ft. to 15 Ft. WEIGHT: Shipping 905 lbs. Actual 755 lbs.		\$10,728.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add:	\$1,123.00
3612X 9-15 WI 39446	Includes all features of 39445 but also wireless control instead of wired remote control, Capable of Wi-Fi diagnostics through 26684 Tool		\$11,850.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.		\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 4000X-16

SPECIFICATIONS

16,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 4,000 Lbs. at 4 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor
 On / Off 12 Volt electric control system
 Remote Pendant Control 25 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 85 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 8 Ft. - 12 Ft.; Manual to 16 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 15" square with a 12" square bolt pattern.

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.75" x 3.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

18K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
4000X-16 39249	Power boom extension from 8 Ft. to 12 Ft. with Manual Extension to 16 Ft. WEIGHT: Shipping 960 lbs. Actual 858 lbs.	\$12,603.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
4000X-16 WI 39395	Includes all features of 39249 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$13,726.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 4000X-20

SPECIFICATIONS

16,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 4,000 Lbs. at 4 Ft. Load radius
 Planetary Gear Winch with 2.7 HP Permanent Magnet Motor
 On / Off 12 Volt electric control system
 Remote Pendant Control 25 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 1/4" x 85 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 10 Ft. - 16 Ft.; Manual to 20 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 15" square with a 12" square bolt pattern.

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Mounting Bolts Grade 8: 0.75" x 3.50" (Four)
 Terminal Lugs #1 GA 0.25 Dia. (2)
 Terminal Lugs #1 GA 0.37 Dia. (2)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 31 or larger, deep cycle, near the crane is advised.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

18K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
4000X-20 39244	Power boom extension from 10 to 16 Ft. with Manual Extension to 20 Ft. WEIGHT: Shipping 995 lbs. Actual 913 lbs.	\$12,920.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
4000X-20 WI 39396	Includes all features of 39244 but also wireless control instead of wired remote control, Digital voltmeter / ammeter, capable of Wi-Fi diagnostics through 26684 Tool	\$14,043.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 5000WX-20

SPECIFICATIONS

25,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 5,000 Lbs. at 5 Ft. Load radius
 Planetary Gear Electric Winch
 On / Off 12 Volt electric control system
 Remote Pendant Control 25 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 5/16" x 80 Ft. (9,600 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 10 Ft. - 16 Ft.; Manual to 20 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System with curved bail arms
 Voltmeter / Ammeter on body of crane
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 16 3/4" square with a 14 3/4 " square bolt pattern.

INCLUDED

Battery Power Cable 1/0 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Circuit Breaker, 200 Amp (1)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Terminal Lugs 1/0 GA 0.25 Dia. (4)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 4D or larger, deep cycle, near the crane is advised.
 Mounting Bolts Grade 8: 7/8" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

25K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
5000X-20 39418	Power boom extension from 10 Ft. to 16 Ft. with Manual Extension to 20 Ft. WEIGHT: Shipping 1670 lbs. Actual 1317 lbs.	\$16,332.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
5000X-20 WI 39428	Includes all features of 39418 but also wireless control instead of wired remote control, Capable of Wi-Fi diagnostics through 26684 Tool	\$17,455.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 5000WX-12-20

SPECIFICATIONS

25,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 5,000 Lbs. at 5 Ft. Load radius
 Planetary Gear Electric Winch
 On / Off 12 Volt electric control system
 Remote Pendant Control 25 Ft. with E-Stop & audible signal function
 Galvanized Aircraft Cable 5/16" x 80 Ft. (9,600 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Full Power 12 Ft. - 20 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System with curved bail arms
 Voltmeter / Ammeter on body of crane
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 16 3/4" square with a 14 3/4 " square bolt pattern.

INCLUDED

Battery Power Cable 1/0 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Circuit Breaker, 200 Amp (1)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Terminal Lugs 1/0 GA 0.25 Dia. (4)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 4D or larger, deep cycle, near the crane is advised.
 Mounting Bolts Grade 8: 7/8" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

25K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
5000X 12-20 39419	Power boom extension from 12 Ft. to 20 Ft. WEIGHT: Shipping 1685 lbs. Actual 1392 lbs.	\$16,332.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
5000X 12-20 WI 39421	Includes all features of 39419 but also wireless control instead of wired remote control, Capable of Wi-Fi diagnostics through 26684 Tool	\$17,455.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

12V D. C. POWERED ELECTRIC CRANES

MODEL 6036WX

SPECIFICATIONS

36,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 6,000 Lbs. at 6 Ft. Load Radius
 Planetary Gear Electric Winch
 On / Off 12 Volt electric control system
 Remote Pendant Control 25 Ft. with E-Stop & audible signal function
 Wire Rope, 6 X 36, 5/16" x 90 Ft. (10,540 Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 10 Ft. - 16 Ft.; Manual to 20 Ft.
 Counter balance valve (holding valve on cylinder)
 Overload Protection System
 Anti-Two Block System with curved bail arms
 Voltmeter / Ammeter on body of crane
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 16 3/4" square with a 14 3/4" square bolt pattern.

INCLUDED

Battery Power Cable #1 x 30 Ft. with Quick Disconnect Mecon
 Circuit Breaker, 150 Amp (2)
 Circuit Breaker, 200 Amp (1)
 Ground Cable 1/0 x 3 Ft. for the factory battery to the truck frame
 Master Disconnect Switch and Bracket
 Terminal Lugs 1/0 GA 0.25 Dia. (4)
 Terminal Lugs 1/0 GA 0.37 Dia. (4)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

Consistent 12 Volt DC power source with sufficient amperage while crane is running under load.
 For optimum performance, a dedicated battery, Group 4D or larger, deep cycle, near the crane is advised.
 Mounting Bolts Grade 8: 7/8" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

36K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 17,500 lbs.

Model / Item No.		Bert's Contract
6036X-20 39403	Power boom extension from 10 Ft. to 16 Ft. with Manual Extension to 20 Ft. WEIGHT: Shipping 1730 lbs. Actual 1484 lbs.	\$17,306.00
28492	OPTION: Add On Wireless Controls - Plugs into pendant control socket Maintains the use of Standard Wired Pendant	Add: \$1,123.00
6036X-20 WI 39410	Includes all features of 39403 but also wireless control instead of wired remote control, Capable of Wi-Fi diagnostics through 26684 Tool	\$18,429.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes (WI) above 2,000 lbs. capacity.	\$725.00

HYDRAULIC POWERED CRANES

MODEL 1032XP

SPECIFICATIONS

10,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 3,200 Lbs. at 3 Ft. Load radius
 Planetary Gear Winch - single line speed 34 fpm at 5 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function.
 Galvanized Aircraft Cable 1/4" x 62 Ft. (7,000 Lbs. Breaking Strength)
 Travel Block w/ swivel hook, for easy two part line hook up
 Power Rotation - 365 degree
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 7 Ft. - 11 Ft. ; Manual 11 Ft. - 15 Ft.
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 15" square with a 12" square bolt pattern

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Mounting Bolts Grade 8: 0.50" x 2.50" (Four)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir and Hoses
 Pump should supply 4 GPM at 2750 PSI.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 12K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 11,000 lbs.

Model / Item No.		Bert's Contract
1032XP-15 39255	Power boom extension from 7 Ft. to 11 Ft. with Manual Extension to 15 Ft. Wireless Radio Proportional Hydraulic Controls are standard WEIGHT: Shipping 930 lbs. Actual 724 lbs.	\$14,135.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00
	OPTION: Remote Pendant Control (Wired) on above Proportional cranes 39256 Model 1032XP-15 HE	Deduct: (\$605.00)

HYDRAULIC POWERED CRANES

MODEL 1640XP

SPECIFICATIONS

16,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 4,000 Lbs. at 4 Ft. Load radius
 Planetary Gear Winch - single line speed 30 fpm at 5 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function.
 Galvanized Aircraft Cable 1/4" x 70 Ft. (7,000 Lb. Breaking Strength)
 Travel Block w/ swivel block, for easy two part line hook up
 Power Rotation - 365 degree
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power and Manual See specific models below
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting plate is 15" square with a 12" square bolt pattern

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Mounting Bolts Grade 8: 0.75" x 3.00" (Four)
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir and Hoses
 Pump should supply 6 GPM at 2750 PSI.
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27860 for service body or P.N. 22158 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 18K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
1640XP-16 39432	Power boom extension from 8 Ft. to 12 Ft. with Manual Extension to 16 Ft. Wireless Radio Proportional Hydraulic Controls are standard WEIGHT: Shipping 1035 lbs. Actual 920 lbs.	\$15,665.00
1640XP-20 39267	Power boom extension from 10 to 16 Ft. with Manual Extension to 20 Ft. Wireless Radio Proportional Hydraulic Controls are standard WEIGHT: Shipping 1065 lbs. Actual 965 lbs.	\$15,965.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00
	OPTION: Remote Pendant Control (Wired) on above Proportional cranes 39265 Model 1640XP-16 HE / 39436 Model 1640XP-20 HE	Deduct: (\$605.00)

HYDRAULIC POWERED CRANES

MODEL 2550XP

SPECIFICATIONS

25,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 5,000 Lbs. at 5 Ft. Load Radius
 Worm Gear Winch - single line speed 20 fpm at 6 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function.
 Galvanized Aircraft Cable 5/16" x 80 Ft. (9,800 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 10 Ft. - 16 Ft. ; Manual 16 Ft. - 20 Ft.
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 16 3/4" square with a 14 3/4 " square bolt pattern.

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir and Hoses
 Pump should supply 6 GPM at 2750 PSI.
 Four 7/8 Grade 8 mounting bolts
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 25K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
2550XP-20 39330	Power boom extension from 10 Ft. to 16 Ft. 4 Ft. Manual Extension to 20 Ft. Wireless Radio Remote Control with E-Stop & audible signal function WEIGHT: Shipping 1608 lbs. Actual 1302 lbs.	\$17,318.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00
	OPTION: Remote Pendant Control (Wired) on above Proportional crane 39327 Model 2550XP-20 HE	Deduct: (\$605.00)

HYDRAULIC POWERED CRANES

MODEL 2550XP 12-20

SPECIFICATIONS

25,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 5,000 Lbs. at 5 Ft. Load Radius
 Planetary Gear Winch - single line speed 31 fpm at 6 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function
 Galvanized Aircraft Cable 5/16" x 80 Ft. (9,800 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Full Power 12 Ft. - 20 Ft.
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 16 3/4" square with a 14 3/4 " square bolt pattern.

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir and Hoses
 Pump should supply 6 GPM at 2750 PSI.
 Mounting Bolts Grade 8: 7/8" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 25K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 14,500 lbs.

Model / Item No.		Bert's Contract
2550XP 12-20 39334	Power boom extension from 12 Ft. to 20 Ft. Wireless Radio Remote Control with E-Stop & audible signal function WEIGHT: Shipping 1620 lbs. Actual 1365 lbs.	\$17,418.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00

The 2550XP 12-20 is offered only as wireless proportional

HYDRAULIC POWERED CRANES

MODEL 3660XP

SPECIFICATIONS

36,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 6,000 Lbs. at 6 Ft. Load Radius
 Worm Gear Winch - single line speed 19 fpm at 6 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function
 Galvanized Aircraft Cable 3/8" x 95 Ft. (14,400 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 10 Ft. - 16 Ft. ; Manual 16 Ft. - 20 Ft.
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 16 3/4" square with a 14 3/4 " square bolt pattern.

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir and Hoses
 Pump should supply 6 GPM at 2750 PSI.
 Mounting Bolts Grade 8: 7/8" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 36K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 17,500 lbs.

Model / Item No.		Bert's Contract
3660XP-20 39340	Power boom extension from 10 Ft. to 16 Ft. with Manual Extension to 20 Ft. Wireless Radio Remote Control with E-Stop & audible signal function WEIGHT: Shipping 1775 lbs. Actual 1532 lbs.	\$18,538.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00
	OPTION: Remote Pendant Control (Wired) on above Proportional cranes 39339 MODEL 3660XP-20 HE	Deduct: (\$605.00)

HYDRAULIC POWERED CRANES

MODEL 4064DXP

SPECIFICATIONS

40,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 6,400 Lbs. at 6.2 Ft. Load Radius
 Planetary Gear Winch - single line speed 45 fpm at 8 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function
 Galvanized Aircraft Cable 3/8" x 95 Ft. (14,400 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Full Power (10 Ft. - 22 Ft. or 15 Ft. to 30 Ft.)
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5 and SAE J1063
 Mounting Plate is 17 3/4" square with a 14 3/4" square bolt pattern

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir and Hoses
 Pump should supply 8 GPM at 2750 PSI.
 Mounting Bolts Grade 8: 7/8" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 40K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 19,500 lbs.

Model / Item No.		Bert's Contract
4064DXP-22 39364	Power boom Extension from 10 Ft. to 22 Ft. WEIGHT: Shipping 2255 lbs. Actual 1960 lbs.	\$20,140.00
4064DXP-30 39368	Power boom Extension from 15 Ft. to 30 Ft. WEIGHT: Shipping 2835 lbs. Actual 2190 lbs.	\$21,355.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00

The 4064XP is offered with wireless proportional controls only.

HYDRAULIC POWERED CRANES

MODEL 5080XP

SPECIFICATIONS

50,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 8,000 Lbs. at 6.25 Ft. Load Radius
 Worm Gear Winch - single line speed 19 fpm at 6 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Control with E-Stop & audible signal function
 Galvanized Aircraft Cable 3/8" x 95 Ft. (14,400 Lb. Breaking Strength)
 Traveling Block with Roller Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Power 10 Ft. - 16 Ft. ; Manual 16 Ft. - 20 Ft.
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5 and SAE J1063
 Mounting Plate is 16 3/4" Square with a 14 3/4" square bolt pattern

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir, Filter and Hoses.
 8 GPM at 2750 PSI for optimal performance
 Mounting Bolts Grade 8: 1.00" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 50K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 20,000 lbs.

Model / Item No.		Bert's Contract
5080XP-20 39329	Power boom Extension from 10 Ft. to 16 Ft. with Manual Extension to 20 Ft. Wireless Radio Remote Control with E-Stop & audible signal function WEIGHT: Shipping 1915 lbs. Actual 1692 lbs.	\$20,758.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00
	OPTION: Remote Pendant Control (Wired) on above Proportional cranes 39399 Model 5080XP-20 HE	Deduct: (\$605.00)

HYDRAULIC POWERED CRANES

MODEL 60100DXP

SPECIFICATIONS

60,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 10,000 Lbs. at 6 Ft. Load Radius
 Planetary Gear Winch - single line speed 45 fpm at 8 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Controls with E-Stop & audible signal function
 Galvanized Aircraft Cable 7/16" x 100 Ft. (17,600 Lb. Breaking Strength)
 Traveling Block with Ball Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Full Power (12' - 24' or 15' to 30')
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 21" Square with a 15.5" X 18.5" bolt pattern

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir, Filter and Hoses.
 8 GPM at 2750 PSI for optimal performance
 Mounting Bolts Grade 8: 1.25" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 27818 for service body or 24589 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 72K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 26,000 lbs.

Model / Item No.		Bert's Contract
60100DXP-24 39375	Power boom extension from 11 Ft. to 24 Ft. WEIGHT: Shipping 2927 lbs. Actual 2579 lbs.	\$23,858.00
60100DXP-30 39383	Power boom extension from 15 Ft. to 30 Ft. WEIGHT: Shipping 3315 lbs. Actual 2980 lbs.	\$25,823.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00

The 60100XP is offered with wireless proportional controls only.

HYDRAULIC POWERED CRANES

MODEL 72100DXP

SPECIFICATIONS

72,000 Ft.-Lbs. Moment Rating
 Maximum Capacity 10,000 Lbs. at 7.2 Ft. Load Radius
 Planetary Gear Winch - single line speed 45 fpm at 8 gpm
 Proportional hydraulic control system - standard
 Wireless Radio Remote Controls with E-Stop & audible signal function
 Galvanized Aircraft Cable 7/16" x 100 Ft. (17,600 Lb. Breaking Strength)
 Traveling Block with Ball Bearing Swivel Safety Hook
 Power Rotation - Unlimited
 Boom Elevation - Full Power (-5 Deg. To 75 Deg.)
 Boom Extension - Full Power (12' - 24' or 15' to 30')
 Counter balance valve (holding valve on all cylinders)
 Overload Protection System
 Anti-Two Block System
 Meets requirements of 29 CFR 1910.180, ANSI B30.5, SAE J1063
 Mounting Plate is 21" Square with a 15.5" X 18.5" bolt pattern

INCLUDED

Battery Power Cable 10 Ga. x 25 Ft. with toggle switch, switch bracket, terminal rings & fuse for the required DC power connection to vehicle.
 Bubble Level
 Crane-Truck Stability Plate
 Recommended Installation Instructions
 Owners Manual

REQUIRED

PTO, Pump, Reservoir, Filter and Hoses.
 8 GPM at 2750 PSI for optimal performance
 Mounting Bolts Grade 8: 1.25" Dia. (4)
 Installer responsible for meeting OSHA stability requirements of 29 CFR -1910.180 (c)(1)
 Boom Rest (P.N. 26718 service body when stowing above horizontal, 22842 for flat bed)

RECOMMENDED

Adjustable pressure relief & flow control valves will ensure that the best optimum performance can be obtained.
 72K Outriggers for meeting vehicle stability requirements
 Minimum Recommended Vehicle GVWR 30,000 lbs.

Model / Item No.		Bert's Contract
72100DXP-24 39366	Power boom extension from 11 Ft. to 24 Ft. WEIGHT: Shipping 3145 lbs. Actual 2580 lbs.	\$28,858.00
72100DXP-30 39400	Power boom extension from 15 Ft. to 30 Ft. WEIGHT: Shipping 3375 lbs. Actual 2985 lbs.	\$30,858.00
24615	Receiver and wire harness for remote control of truck engine. Features include start, stop, engage high idle, and additional control for auxiliary equipment. This option is only available with wireless controlled cranes above 2,000 lbs. capacity.	\$725.00

The 72100XP is offered with wireless proportional controls only

BOOM RESTS

NOTE: Part numbers for the options of boom rests can also be found under Specifications Required for each Crane Model. A boom rest is required for all power rotation cranes. Boom rests are designed to hold the boom in a nearly horizontal position. A loop is included for attaching the hook except on cranes 5,000 lbs. capacity and above as these have a hook on the boom. These boom rests are designed for typical body configurations. For custom applications, please contact Liftmoore. Sufficient reinforcement of the body or flat bed is required.

BOOM REST - SERVICE BODY MOUNT

Item Number		Bert's Contract
27860	REST, BOOM SA 5.0" AH 14"-19" BASE WIDTH=20.0" 206-4000 For use with Models 206REL, 208EL, 2700AR, 2010, 3200, 1032, 3612, 4000, 1640	\$192.00
27818	REST, BOOM SA 7.0" AH 18"-27" BASE WIDTH=22.0" 5000-60100 For use with Models 5000, 2550, 3055, 6036, 3660, 4064, 5080, and 60100	\$201.00
24913	REST, BOOM SA 7.0" AH 23"-35" BASE WD=22.0" 5000-60100 W/BC For use with Models 5000, 2550, 3055, 6036, 3660, 4064, 5080, and 60100 when stowed above horizontal	\$210.00
26718	REST, BOOM SA 8.0" AH 25"-37" BASE WIDTH=22.5" 72100 W/BC For use with Model 72100 when stowed above horizontal	\$229.00


Boom rest descriptions are used to define how it is configured

First Line Description

- a = SA = Saddle is Adjustable to match the boom angle
- b = 5.0" = The maximum boom width that the saddle is designed to handle
- c = AH = Adjustable height
- d = 14"-19" = The height range between which the saddle is adjustable

Second Line Description

- e = BASE WIDTH = 20.0" - Length of the angle iron of the base that corresponds to the compartment top
- 206REL - 4000 - Crane models or range of crane models that works with the boom rest
- W/BC - For use when crane will be stowed over stowed above horizontal (over bottle comprtmt)

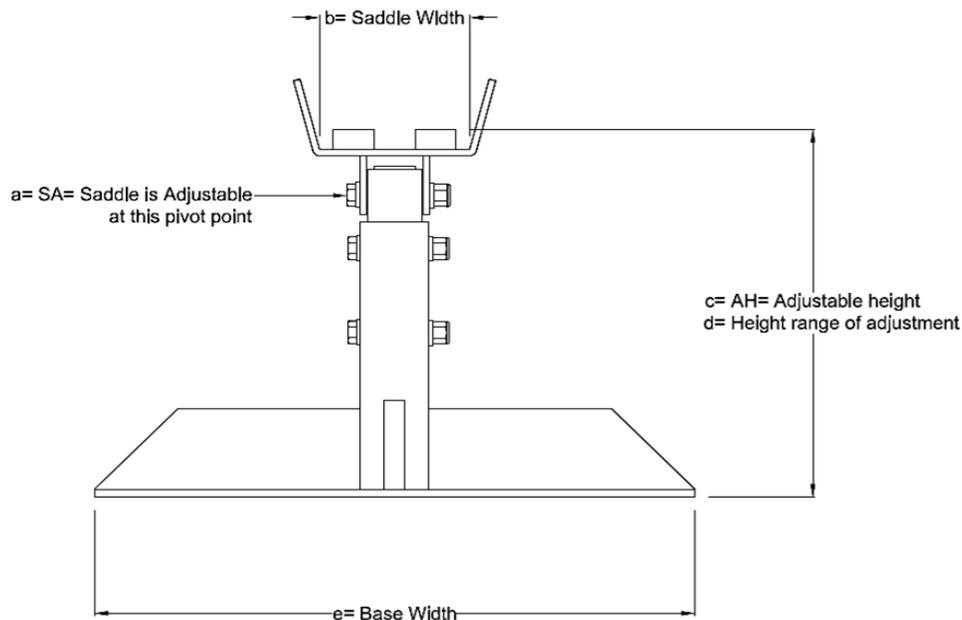

BOOM RESTS

NOTE: Part numbers for the options of boom rests can also be found under Specifications Required for each Crane Model. A boom rest is required for all power rotation cranes. Boom rests are designed to hold the boom in a nearly horizontal position. A loop is included for attaching the hook except on cranes 5,000 lbs. capacity and above as these have a hook on the boom. These boom rests are designed for typical body configurations. For custom applications, please contact Liftmoore. Sufficient reinforcement of the body or flat bed is required.

BOOM REST - FLAT BED MOUNT

Item Number		Bert's Contract
22167	REST, BOOM SF 3.0" VH FLAT BED BASE 6" X 6" 2000 / 206R Specify height when ordering. For use with Models 2000 and 206R (Not 206REL).	\$67.00
22158	REST, BOOM SF 5.0" VH FLAT BED BASE 6" X 6" 206REL - 4000 Specify height when ordering. For use with Models 206REL, 208EL, 2700AR, 2010, 3200, 1032, 3612, 4000, 1640	\$95.00
24589	REST, BOOM SF 7.0" VH FLAT BED BASE 6" X 6" 5000 - 60100 Specify height when ordering. For use with Models 5000, 2550, 3055, 6036, 3660, 4064, 5080, and 60100	\$115.00
22842	REST, BOOM SF 8.0" VH FLAT BED BASE 6" X 6" 72100 Specify height when ordering. For use with Model 72100	\$123.00


Boom rest descriptions are used to define how it is configured

First Line Description

- a = SF = Saddle is Fixed assuming horizontal stowing of the boom
- b = 5.0" = The maximum boom width that the saddle is designed to handle
- c = VH = Variable height, to be determined at time of order
- d = FLAT BED = Designates these are designed for use on other than a compartment top

Second Line Description

- e = BASE 6" X 6" - The dimensions of the base plate of the boom rest are noted
- 206REL - 4000 - Crane models or range of crane models the boom rest works with

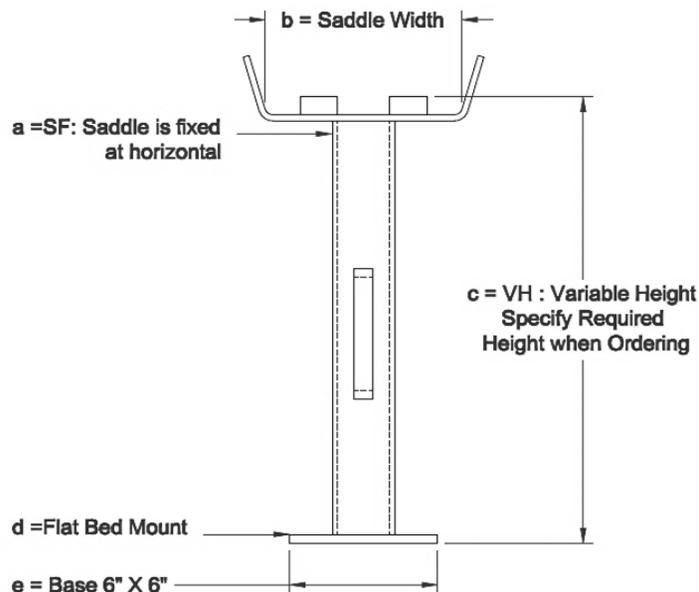

- Model
- 2000 -
- 206R -
- 206REL -
- 208EL -
- 2700AR -
- 2010REL / REE -
- 3200 / 1032 -
- 3612REE -
- 3612X 9-15 -
- 4000 / 1640 -
- 5000 / 2550 -
- 6036 / 3660 -
- 5080X -
- 4064DX -
- 60100DX -
- 72100DX -

JACKSTANDS

NOTE: 12K, 18K, 25K & 36K refer to the crane moment rating in 1,000 Ft.-Lbs.

Item Number		Bert's Contract
30328	JACKSTAND, 12K OVERCENTER RIGHT SIDE	\$119.00
38638	JACKSTAND, 12K OVERCENTER LEFT SIDE	\$119.00
38518	JACKSTAND, 12K OVERCENTER VH HEIGHT UNDER BODY = ____" L.S.	\$128.00
31131	JACKSTAND, 12K DROP DOWN TUBE w/SCREW BASE - PERMANENT MOUNT	\$263.00
30329	JACKSTAND, 36K OVERCENTER RIGHT SIDE	\$160.00
38658	JACKSTAND, 36K OVERCENTER LEFT SIDE	\$160.00
38517	JACKSTAND, 36K OVERCENTER VH HEIGHT UNDER BODY = ____" L.S.	\$187.00

OUTRIGGER DESCRIPTION & DEFINITION

Outrigger Descriptions are used to indicate how the Outrigger is configured
Understanding this will assist you in selecting the Correct Outrigger

Sample Description and its meaning

OUTRIGGER, 40K 36CHOHD-12SHOHD

40K Indicates the capacity of the Outrigger Package (i.e. 40,000 Ft.-Lbs.)

36 Indicates the movement in inches Outrigger extends.

C Indicates the side of truck movement occurs on C = Curb Side

H Indicates the type of movement H = Hydraulic, M = Manual, FX = Fixed

O Indicates direction of movement O = Out

H Indicates type of Jack H = Hydraulic, C = Crank, NJ = No Jack

D Indicates direction of movement D = Down

12 Indicates the movement in inches Outrigger extends.

S Indicates the side of truck movement occurs on S = Street Side

H Indicates the type of movement H = Hydraulic, M = Manual, FX = Fixed

O Indicates direction of movement O = Out

H Indicates type of Jack H = Hydraulic, C = Crank, NJ = No Jack

D Indicates direction of movement D = Down

OUTRIGGERS
Up to 12,000 Ft.-Lbs. Cranes
Center Tube Dimension 2.5" x 5.0"

Manual In / Out and Manual Crank Up / Down Operation		Bert's Contract
Item Number		
38885	OUTRIGGER, 12K 30CMOCD-SFXNJ WEIGHT: Shipping 235 lbs. Actual 175 lbs.	\$609.00
38860	OUTRIGGER, 12K 25CMOCD-15SMOCD (79" Body Width) WEIGHT: Shipping 265 lbs. Actual 185 lbs.	\$886.00
38862	OUTRIGGER, 12K 30CMOCD-15SMOCD (89" Body Width) WEIGHT: Shipping 285 lbs. Actual 175 lbs.	\$887.00
38851	OUTRIGGER, 12K 30CMOCD-15SMOCD (94" Body Width) WEIGHT: Shipping 285 lbs. Actual 178 lbs.	\$908.00

OUTRIGGERS
Up to 18,000 Ft.-Lbs. Cranes
Center Tube Dimension 4.0" x 6.0"

Manual In / Out and Manual Crank Up / Down Operation		Bert's Contract
39028	OUTRIGGER, 18K 36CMOCD-12SMOCD (95" Body Width) WEIGHT: Shipping 315 lbs. Actual 275 lbs.	\$1,181.00

See page 35 for Description & Definitions of Outriggers

OUTRIGGERS
Up to 25,000 Ft.-Lbs. Cranes
Center Tube Dimension 5.0" x 7.0"

Manual In / Out and Manual Crank Up / Down Operation		Bert's Contract
38426	OUTRIGGER, 25K 36CMOCD-12SMOCD (90" Body Width) WEIGHT: Shipping 515 lbs. Actual 344 lbs.	\$1,442.00
38427	OUTRIGGER, 25K 36CMOCD-12SMOCD (95" Body Width) WEIGHT: Shipping 520 lbs. Actual 354 lbs.	\$1,523.00
38962	OUTRIGGER, 25K 24CMOCD-24SMOCD (95" Body Width) WEIGHT: Shipping 525 lbs. Actual 355 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$1,537.00
Manual In / Out and Hydraulic Up / Down Operation		Bert's Contract
<p>These outriggers are offered with manual pull out and hydraulic up/down jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
38461	OUTRIGGER, 25K 36CMOHD-12SMOHD WEIGHT: Shipping 585 lbs. Actual 429 lbs.	\$3,808.00
38443	OUTRIGGER, 25K 24CMOHD-24SMOHD WEIGHT: Shipping 585 lbs. Actual 430 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$3,820.00
Hydraulic In / Out and Hydraulic Up / Down Operation		Bert's Contract
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39276	OUTRIGGER, 25K 36CHOHD-12SHOHD WEIGHT: Shipping 590 lbs. Actual 476 lbs.	\$5,499.00
39223	OUTRIGGER, 25K 20CHOHD-20SHOHD WEIGHT: Shipping 590 lbs. Actual 483 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$5,553.00
Hydraulic In / Out and Hydraulic Up / Down Operation		Bert's Contract
Extends Curb side only, Street side Fixed		
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39278	OUTRIGGER, 25K 36CHOHD-SFXHD WEIGHT: Shipping 590 lbs. Actual 405 lbs.	\$4,940.00
PUMP KIT		Bert's Contract
<p>For hydraulic operation outriggers when no other hydraulic system is available. This is most commonly used with a 12V DC powered crane. The pump kit includes: electric hydraulic pump with starter solenoid and control switch.</p>		
34198	KIT, OUTRIG HYD. PUMP 12V 25K+ USE WITH HYDRAULIC OUTRIGGER	\$685.00

See page 35 for Description & Definitions of Outriggers

OUTRIGGERS
Up to 40,000 Ft.-Lbs. Cranes
Center Tube Dimension 6.0" x 8.0"

Manual In / Out and Manual Crank Up / Down Operation		
38038	OUTRIGGER, 40K 36CMOCD-12SMOCD WEIGHT: Shipping 535 lbs. Actual 395 lbs.	Bert's Contract \$1,606.00
38702	OUTRIGGER, 40K 24CMOCD-24SMOCD WEIGHT: Shipping 565 lbs. Actual 443 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$1,616.00
Manual In / Out and Hydraulic Up / Down Operation		
<p>These outriggers are offered with manual pull out and hydraulic up/down jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
38588	OUTRIGGER, 40K 36CMOHD-12SMOHD WEIGHT: Shipping 610 lbs. Actual 493 lbs.	Bert's Contract \$4,198.00
Hydraulic In / Out and Hydraulic Up / Down Operation		
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39279	OUTRIGGER, 40K 36CHOHD-12SHOHD WEIGHT: Shipping 645 lbs. Actual 568 lbs.	Bert's Contract \$5,774.00
39227	OUTRIGGER, 40K 20CHOHD-20SHOHD WEIGHT: Shipping 635 lbs. Actual 525 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$5,845.00
Hydraulic In / Out and Hydraulic Up / Down Operation		
Extends Curb side only, Street side Fixed		
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39219	OUTRIGGER, 40K 42CHOHD-SFXHD NOTE: INTERNAL HOSES FOR THE DOWN CYLINDERS WEIGHT: Shipping 585 lbs. Actual 400 lbs.	Bert's Contract \$5,774.00
PUMP KIT		
<p>For hydraulic operation outriggers when no other hydraulic system is available. This is most commonly used with a 12V DC powered crane. The pump kit includes: electric hydraulic pump with starter solenoid and control switch.</p>		
34198	KIT, OUTRIG HYD. PUMP 12V 25K+ USE WITH HYDRAULIC OUTRIGGER	Bert's Contract \$685.00

See page 35 for Description & Definitions of Outriggers

OUTRIGGERS
Up to 50,000 Ft.-Lbs. Cranes
Center Tube Dimension 7.0" x 9.0"

Manual In / Out and Manual Crank Up / Down Operation		
38312	OUTRIGGER, 50K 36CMOCD-12SMOCD WEIGHT: Shipping 620 lbs. Actual 454 lbs.	Bert's Contract \$2,067.00
38421	OUTRIGGER, 50K 24CMOCD-24SMOCD WEIGHT: Shipping 620 lbs. Actual 458 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$2,076.00
Manual In / Out and Hydraulic Up / Down Operation		
<p>These outriggers are offered with manual pull out and hydraulic up/down jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
38590	OUTRIGGER, 50K 36CMOHD-12SMOHD WEIGHT: Shipping 620 lbs. Actual 531 lbs.	Bert's Contract \$4,468.00
39098	OUTRIGGER, 50K 24CMOHD-24SMOHD WEIGHT: Shipping 625 lbs. Actual 535 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$4,540.00
Hydraulic In / Out and Hydraulic Up / Down Operation		
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39282	OUTRIGGER, 50K 36CHOHD-12SHOHD WEIGHT: Shipping 685 lbs. Actual 593 lbs.	Bert's Contract \$6,101.00
39230	OUTRIGGER, 50K 20CHOHD-20SHOHD WEIGHT: Shipping 690 lbs. Actual 596 lbs. NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS	\$6,173.00
PUMP KIT		
<p>For hydraulic operation outriggers when no other hydraulic system is available. This is most commonly used with a 12V DC powered crane. The pump kit includes: electric hydraulic pump with starter solenoid and control switch.</p>		
34198	KIT, OUTRIG HYD. PUMP 12V 25K+ USE WITH HYDRAULIC OUTRIGGER	Bert's Contract \$685.00

See page 35 for Description & Definitions of Outriggers

OUTRIGGERS
Up to 72,000 Ft.-Lbs. Cranes
Center Tube Dimension 8.0" x 10.0"

Manual In / Out and Manual Crank Up / Down Operation		Bert's Contract
38804	OUTRIGGER, 72K 48CMOCD-SFXCD WEIGHT: Shipping 625 lbs. Actual 504 lbs.	\$2,141.00

Manual In / Out and Hydraulic Up / Down Operation		
<p>These outriggers are offered with manual pull out and hydraulic up/down jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
38719	OUTRIGGER, 72K 36CMOHD-12SMOHD WEIGHT: Shipping 640 lbs. Actual 583 lbs.	Bert's Contract \$4,758.00

Hydraulic In / Out and Hydraulic Up / Down Operation		
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39283	OUTRIGGER, 72K 36CHOHD-12SHOHD WEIGHT: Shipping 725 lbs. Actual 615 lbs.	Bert's Contract \$6,428.00
39229	OUTRIGGER, 72K 20CHOHD-20SHOHD WEIGHT: Shipping 728 lbs. Actual 618 lbs.	\$6,479.00
NOTE: DESIGNED FOR CENTER MOUNTED APPLICATIONS		

Hydraulic In / Out and Hydraulic Up / Down Operation		
Extends Curb side only, Street side Fixed		
<p>These outriggers are offered with power in/out extension and Power Up/Down Jacks The outrigger package includes diverter valve for selecting either outrigger or crane operation, lever operated directional control valve with hoses and fittings for cylinder to control valve only.</p>		
39402	OUTRIGGER, 72K 42CHOHD-SFXHD NOTE: INTERNAL HOSES FOR THE DOWN CYLINDERS	Bert's Contract \$6,428.00

PUMP KIT	For hydraulic operation outriggers when no other hydraulic system is available. This is most commonly used with a 12V DC powered crane. The pump kit includes: electric hydraulic pump with starter solenoid and control switch.	
34198	KIT, OUTRIG HYD. PUMP 12V 25K+ USE WITH HYDRAULIC OUTRIGGER	Bert's Contract \$685.00

See page 35 for Description & Definitions of Outriggers

ACCESSORIES

PEDESTALS - FOR FLAT BED MOUNTING

Designed to match the mounting requirements of crane.
Heights up to 36 inches can be supplied at the below prices.
For taller pedestals contact Liftmoore. Advise height when ordering.

Item Number		Bert's Contract
18375	PEDESTAL, 12K FT-LB 24"+ HEIGHT:___" FOR ABOVE 24"	\$457.00
22796	PEDESTAL, 12K FT-LB 24"- HEIGHT:___" FOR 24" & BELOW	\$434.00
34076	PEDESTAL, 16K FT-LB HEIGHT:_____"	\$513.00
32624	PEDESTAL, 25K/36K FT-LB/24"+ HEIGHT:_____ " FOR ABOVE 24"	\$541.00
23176	PEDESTAL, 40K FT-LB / 24"+ HEIGHT:_____ " FOR ABOVE 24"	\$552.00
33654	PEDESTAL, 50K FT-LB / 24"+ HEIGHT:_____ " FOR ABOVE 24"	\$647.00
22807	PEDESTAL, 72K FT-LB VH HEIGHT:_____ " FOR ABOVE 24"	\$708.00

MOUNTING PLATES

Mounting plates are for welding onto the truck body. They are fabricated
to fit under the crane matching the bolt pattern and cutouts needed.

Item Number		Bert's Contract
30684	PLATE, MOUNTING L-21F/L-22/206 0.50" x 12" x 12" drilled for L-Series.	\$66.00
28694	PLATE, MOUNTING 2010 & 3612 MACH 0.50" x 14" x 14" for 2010 & 3612	\$75.00
30685	PLATE, MOUNTING 2700/3200 MACH 0.50" x 15" x 15" for 208, 2000A, 2700, 3200 & 1032.	\$75.00
16698	PLATE, MOUNTING 4000 MACH 0.75" x 15" x 15" for 4000 & 1640	\$85.00
31821	PLATE, MOUNTING 25K/36K MACH. 0.75" x 16.75" x 16.75" for 5000, 2550, 6036, & 3660	\$106.00
22136	PLATE, MOUNTING 4064 MACH 0.75" x 17.75" x 17.75" for 4064	\$122.00
33905	PLATE, MOUNTING 50K MACH. 1.00" x 16.75" x 16.75" for 5080	\$129.00
21954	PLATE, MOUNTING 72K MACH. 1.25" x 21" x 21" for 60100 & 72100	\$274.00

ACCESSORIES

RECOMMENDED HYDRAULIC COMPONENTS

Item Number		Bert's Contract
24211	KIT, RESERVOIR 10G. W/FILTER 10 Gallon hydraulic reservoir with return line filter, no hoses or fittings. (40 Lbs.) Maximum 6 gpm system with only a crane	\$713.00
27369	VALVE, RELIEF ASSY W/FITTINGS Adjustable Pressure Relief Valve for all hydraulic cranes	\$187.00
24679	VALVE, VARIABLE FLOW CONTROL For all hydraulic cranes - no fittings	\$151.00
SERVICE TOOLS- Boom Lights		
28230	TOOL, CRANE DIAGNOSTIC WIFI	\$548.00
26304	BOX, PENDANT TEST	\$1,502.00
26386	ADAPTER, WIRE 14-PIN TO 10-PIN WIRES HARNESS USE W/26304	\$72.00
26391	WRENCH, LOCKNUT WELDMENT AN-19 Fits 2700,3200 & 1032	\$132.00
26503	WRENCH, LOCKNUT WELDMENT AN-20 Fits 4000 & 1640	\$132.00
26681	TOOL, CRIMP DEUTSCH	\$119.00
18759	EXTRACTOR, DEUTSCH 16 GA PIN	\$5.00
27348	KIT, PALM PILOT DIAGNOSTICS	\$1,080.00
26905	GAUGE, FLOW METER Adjustable Flow Meter, to test hydraulic system fittings not included.	\$529.00
26906	PRESSURE GAUGE, 0-5000 PSI Liquid Filled, to test hydraulic system, fittings not included	\$120.00
TTCT-1001	EWH, REPROGRAMMING KTFM	\$28.00
	Boom Lights	
INST-2008	INSTALL 29167 KIT, LIGHT LED E BOOM TIP - INCLUDES KIT Option: LED Boom Tip Lights Kit includes wiring and installation of kit	\$ 615.00

LIFTMOORE LIMITED WARRANTY

Parts and Structural

Liftmoore, Inc. warrants each LIFTMOORE crane to be free from defects in materials and workmanship for twelve (12) months from the date of delivery to the original customer. Under the terms of this warranty the crane structural components manufactured by LIFTMOORE, Inc. are warranted for thirty-six (36) months from the date of delivery to the original customer. LIFTMOORE, Inc. will repair or replace, as its sole discretion, any equipment or part that is returned f.o.b. to LIFTMOORE, Inc.'s plant at 7810 Pinemont Drive, Houston, Texas 77040, or to one of its authorized dealers, and is found by LIFTMOORE, Inc. or its authorized dealer to have been defective at the time of original delivery.

The foregoing warranty is the exclusive warranty made by LIFTMOORE, Inc. with respect to its cranes and is in lieu of all other warranties. ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS OF ANY CRANE FOR A PARTICULAR PURPOSE OR OPERATION, ARE HERBY EXPRESSLY DISCLAIMED.

The foregoing warranty applies only to LIFTMOORE cranes under normal use and service and does not apply in the event of damage caused by repair or alteration or damage during shipment, accident, negligence, overloading, or misuse, including operator's failure to follow any of the instructions issued with the crane.

This warranty is limited to the original purchaser and is not assignable. In order to submit a claim, the original purchaser must provide a copy of the original invoice for the crane in question within twelve (12) months following the delivery date and within 30 days from the date of repair.

The warranty applies only when the LIFTMOORE crane is used for commercial purposes and does not cover any purchase for use for personal, family or household purposes.

LIMITATION OF LIABILITY: LIFTMOORE, Inc.'s liability for any losses or damages resulting from any cause whatsoever, including LIFTMOORE, Inc.'s NEGLIGENCE or from a defective crane irrespective of whether such defects are discoverable or latent, shall in no event exceed the purchase price of the crane to which losses or damages are claimed, or at the election of LIFTMOORE, Inc., the repair or replacement of the defective crane.

In no event shall LIFTMOORE, Inc. be liable for any special, incidental, or consequential damages, including commercial losses or costs of any kind sustained by purchaser or any other person or for any damages for which purchaser may be liable to other persons by reason of any defect in any LIFTMOORE crane or any part thereof.

LIFTMOORE, Inc. reserves the right to make changes in design or construction of its cranes at any time without obligating itself to make such changes on cranes previously manufactured.

No agent, employee, or representative of LIFTMOORE, Inc. has authority to amend or modify the foregoing warranty or to bind LIFTMOORE, Inc. by any other warranty, guaranty, or assumption of liability.

In the event any provision of this warranty is for any reason held ineffective, the remaining provisions shall remain in full force and effect.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other legal rights that vary from state to state.

