

**SWIFT EVENT TITLE & NUMBER: TRAILERS (T-603.5)**

**\*\* Following is a list of all distributors that are authorized to sell the contract equipment listed in the above solicitation.**

**\*\* SWIFT Vendor Numbers: Provide the Swift Vendor Number (SWIFT ID) and Location Code (LOC CODE) for each Authorized Distributor. Each Authorized Distributor must have an accurate SWIFT ID.**

**\*\* INSURANCE: All distributors MUST provide the required insurance certificates to the State as outline in the Swift Event Special Terms and Conditinos before any State Contract may be executed.**

<b>COMPANY NAME</b>	<b>SWIFT ID</b>	<b>LOC CODE</b>	<b>COMPANY ADDRESS</b>	<b>ST /ZIP</b>	<b>PHONE</b>	<b>CONTACT NAME</b>
Nuss Truck & Equipment	201150	1	6500 Hwy 63 S., Rochester	55903	507-288-9488	Kasey Meyer
Nuss Truck & Equipment	201150	2	2625 Quail Road NE, Sauk Rapids	56379	320--253-6941	Kasey Meyer
Nuss Truck & Equipment	201150	3	2195 W County Road C2, Roseville	55113	651-633-4810	Kasey Meyer
Nuss Truck & Equipment	201150	4	53976 208th Lane, Mankato	56002	507-345-6225	Kasey Meyer
Nuss Truck & Equipment	201150	5	12540 Dupont Ave S, Burnsville	55337	952-894-9595	Kasey Meyer
Nuss Truck & Equipment	201150	5	9403 Westgate Blvd, Proctor	55810	218-628-0333	Kasey Meyer

**STATE OF MINNESOTA  
PRICING Page  
% DISCOUNT**

TRAILERS: DUMP BODY, LOWBOYS, FLATBED, TAG, SLIDE AXLE, UTILITY, GOOSENECK, ENCLOSED, ETC.

Vendor Name:	NUSS TRUCK & EQUIPMENT
Contact Person:	BOB PROW
Street Address:	2195 WEST COUNTY ROAD C2
P.O. Box:	
City, State, Zip	ROSEVILLE, MN 55113
Phone #:	651-633-4810
Toll Free #:	800-704-0935
Fax #:	651-635-0928
Email Address:	<a href="mailto:kmeyer@nussgrp.com">kmeyer@nussgrp.com</a> , <a href="mailto:bprow@nussgrp.com">bprow@nussgrp.com</a>

<b>1.0</b>	<b>DATE AND ID OF PRICE LIST:</b>	BWS
	IF NOT PROPOSING ENTIRE CATALOG, PROVIDE SECTION TITLE(S), PAGE NUMBER(S), ETC. <b>**INSERT ADDITIONAL LINES IF NEEDED **</b>	
	PERCENTAGE DISCOUNT TO BE APPLIED TO ABOVE PRICE LIST	8%

<b>2.0</b>	<b>Options</b>	
<b>2.1</b>	PRICE FOR MN/DOT WIRING AND LIGHTING	NO CHARGE
<b>2.2</b>	Price for Long Stroke Brake chambers	\$169.00
<b>2.3</b>	Price for Hot Dipped Galvanizing	NOT AVAILABLE
	Model	

<b>3.0</b>	<b>Shop Labor Rate per Hour</b>	
<b>3.1</b>	Rate for Inspection	\$148.00
<b>3.2</b>	Rate for Mechanical Work	\$148.00

<b>4.0</b>	<b>DELIVERY STARTING POINT:      City/State/Zip</b>	Roseville, MN 55311
	<b>See Special Terms and Conditions</b>	
	<b>No Flat Rate Allowed</b>	

<b>4.1</b>	<b>PRICE PER MILE FROM STARTING POINT:</b>	\$3.00
<b>4.2</b>	Minimum Delivery Charge (if applicable)	None

<b>5.0</b>	<b>Warranty</b>	
<b>5.1</b>	Warranty Details: Months, years, etc.	<b>One Year</b>

<b>6.0</b>	<b>Discount off List Price for related parts and accessories</b>	<b>0 % Discount</b>
------------	--	---------------------

**MODEL 20 ANR**

**STANDARD SPECIFICATIONS**

**TRAILER**

Overall Length	33 ft. 7 in.
Overall Width	102 in.
Weight lbs +/- 2%	9,800
A-Frame	6 ft. 11 in. Hi-Tensile Cold Formed Wide Flange Beam
Hitch	3 in. pintle eye, adjustable 5 position 23 1/2 in. to 32 1/2 in.

**DECK**



Deck Length	20 ft.
Loaded Deck Height	34 in.
Main Frame	Hi-Tensile Wide Flange 14 in. @ 22
Cross Members	Hi-Tensile 6 in. Channel @ 8.2
Side Rail	Hi-Tensile 8 in. Channel @ 11.5 open on inside
Air Tilt Deck	2 Air Bags
Floor	1 3/4 in. Hardwood with 3/16 in. deck plate over the wheels
Landing Gear	Dual 2 Speed
Rear	Wedge Style bumper with air assisted tilt deck for ground loading
<b>SUSPENSION/AXLES</b>	
Axles	25,000 lbs Capacity 77.5 in. Track 3/4 in. wall
Spread	49 in.
Suspension	Hutch 9700 spring ride
Brakes	Quick Change 12 1/4 in. x 7 in.
Brake Chamber	#3030, All Axles
Air Brake System	2S/1M
Bearings	Oil Bath
Slack Adjusters	Automatic
Hubs & Drums	8 Stud Unimount C / W Cast Drums
Tires	215/75R17.5
Wheels	6.75 x 17.5 Steel Disc - Painted White

**BEAVERTAIL**

Length	6 ft. @ 8 degree slope, Self Cleaning Outside , Planked in inside
--------	---



**GENERAL SPECIFICATIONS**

Electrical System	Modular, Vapor Proof GROTE Ultra Blue
Lights	LED CMVSS 108 / FMVSS 108
Front Connector	SAE J560 7 Pin
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked
Color	Black
Mudflaps	1 set of EZ-2-LOAD at rear
Toolbox	A Frame Mounted
Load Securement	5 per side
GVWR Rating is based on standard configuration and a 15% Tongue weight distribution	

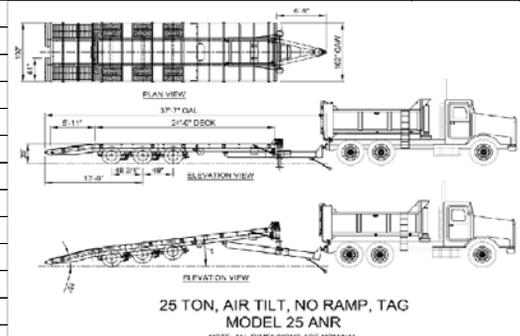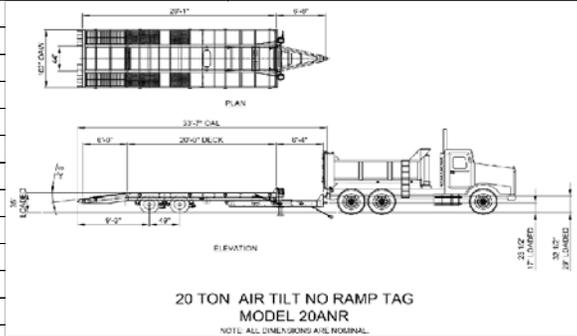


	Weight	Qty	Price	Total
<b>20 ANR - 20 Ton Air Tilt/No Ramp Tandem</b>	9,800		\$ 26,561	\$ -
<b>ACCESSORIES</b>				
1 ft. Bolt On A-Frame Extension	100		\$493.00	\$ -
Dual Holland Mark V 2 Speed Landing Gear	210		\$56.00	\$ -
Mudflaps located in front of lead axle in the center	0		\$169.00	\$ -
Mudflaps with Brackets (Pair)	12		\$188.00	\$ -
Tire Carrier Only (A Frame Top Mount)	15		\$352.00	\$ -
<b>DECK</b>				
* 1 ft. Additional Main Deck (up to 4 extra Feet)	145		\$509.00	\$ -
1 3/8 in. x 7 in. Keruing Shiplapped	0		\$823.00	\$ -
Swingout Outriggers (5 per side)	167		\$784.00	\$ -
<b>LIGHTING/ELECTRICAL</b>				
Amber Flashing Strobe (Mounted in Bumper)	0		\$307.00	\$ -
Four Pin Plug w/Strobe Light Pocket at Rear	5		\$151.00	\$ -
<b>LOAD SECUREMENT DEVICES</b>				
Side Mount D-Rings (pair)	9		\$90.00	\$ -
Straps (3 in. x 30 ft. with Chain and Hook)	7		\$30.00	\$ -
Winch Track (Road Side)	145		\$605.00	\$ -
Winches - Sliding #5820 (hooks not included)	11		\$31.00	\$ -
Winches - Sliding - 3 Bar #14011NP (hooks not included)	13		\$48.00	\$ -
<b>PAINT</b>				
BWS Red - PPG#911722	0		\$416.00	\$ -
BWS Yellow - PPG#920612	0		\$416.00	\$ -
<b>SUSPENSION/AXLES</b>				
Air Ride Suspension (includes air gauge and dump valve)	468		\$3,720.00	\$ -
Alum. Wheel Pkg. 17.5 (8 polished)	-192		\$1,597.00	\$ -
Alum. Wheel Pkg. 17.5 (4 steel, 4 polished)	-96		\$1,009.00	\$ -
Tire Upgrade to 235/75R17.5	98		\$245.00	\$ -
<b>TOTALS</b>				
			\$	\$ -

<b>MODEL 20ART</b>	
<b>STANDARD SPECIFICATIONS</b>	
<b>TRAILER</b>	
Overall Length	34 ft. 6 in.
Overall Width	102 in.
Weight lbs +/- 2%	11,000
A-Frame	6 ft. 11 in. Hi-Tensile Cold Formed Wide Flange Beam
Hitch	3 in. pintle eye, adjustable 5 position 23 1/2 in. to 32 1/2 in.
<b>DECK</b>	
Deck Length	21 ft.
Loaded Deck Height	34 in.
Main Frame	Hi-Tensile Wide Flange 14 in. @ 22
Cross Members	Hi-Tensile 6 in. Channel @ 8.2
Side Rail	Hi-Tensile 8 in. Channel @ 11.5 open on inside
Air Tilt Deck	2 Air Bags
Floor	1 3/4 in. Hardwood with 3/16 in. deck plate over the wheels
Landing Gear	Dual 2 Speed
<b>SUSPENSION/AXLES</b>	
Axles	25,000 lbs Capacity 77.5 in. Track 3/4 in. wall
Spread	49 in.
Suspension	Hutch 9700 spring ride
Brakes	Quick Change 12 1/4 in. x 7 in.
Brake Chamber	#3030, All Axles
Air Brake System	2S/1M
Bearings	Oil Bath
Slack Adjusters	Automatic
Hubs & Drums	8 Stud Unimount C / W Cast Drums
Tires	215/75R17.5
Wheels	6.75 x 17.5 Steel Disc - Painted White
<b>BEAVERTAIL</b>	
Length	6 ft. @ 6 degree slope, Planked in
<b>RAMPS</b>	
Length	38 in. x 72 in. Air Operated Planked
<b>GENERAL SPECIFICATIONS</b>	
Electrical System	Modular, Vapor Proof GROTE Ultra Blue
Lights	LED CMVSS 108 / FMVSS 108
Front Connector	SAE J560 7 Pin
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked
Color	Black
Toolbox	A Frame Mounted
Load Securement	5 per side
	GVWR Rating is based on standard configuration and a 15% Tongue weight distribution

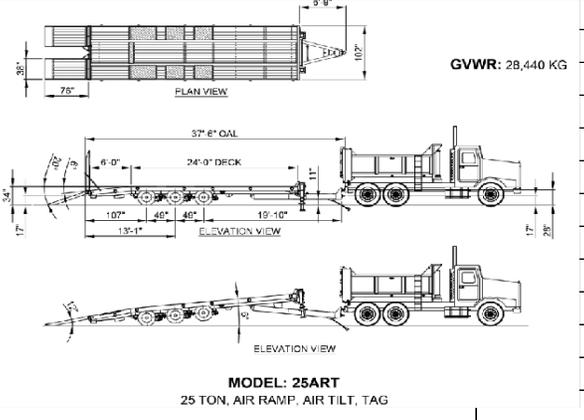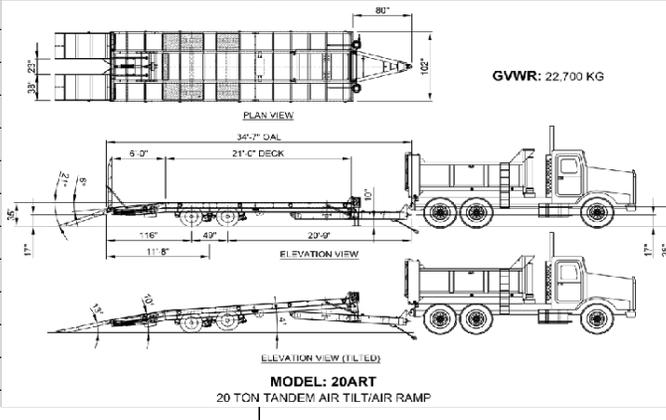

	Weight	Qty	Price	Total
<b>20 ART - 20 Ton Aiur Tilt/Air Ramp Tandem</b>	11,000		\$ 28,478	\$0
<b>ACCESSORIES</b>				
1 ft. Bolt On A-Frame Extension	100		\$ 493	\$0
Dual Holland Mark V 2 Speed Landing Gear	210		\$ 56	\$0
Mudflaps with Brackets (Pair)	12		\$ 188	\$0
Tire Carrier Only (A Frame Top Mount)	15		\$ 352	\$0
<b>DECK</b>				
* 1 ft. Additional Main Deck (up to 4 extra Feet)	145		\$ 509	\$0
1 3/8 in. x 7 in. Keruing Shiplapped	0		\$ 986	\$0
Swingout Outriggers (5 per side)	167		\$ 784	\$0
<b>LIGHTING/ELECTRICAL</b>				
Amber Flashing Strobes (Mounted in Ramps)	0		\$ 314	\$0
Four Pin Plug w/Strobe Light Pocket at Rear	5		\$ 151	\$0
LED City Light Package (Mounted in Ramps)	20		\$ 600	\$0
LED City Light Package (Mounted in Self Cleaning Ramps)	20		\$ 673	\$0
<b>LOAD SECUREMENT DEVICES</b>				
Side Mount D-Rings (pair)	9		\$ 90	\$0
Straps (3 in. x 30 ft. with Chain and Hook)	7		\$ 30	\$0
Winch Track (Road Side)	145		\$ 605	\$0
Winches - Sliding #5820 (hooks not included)	11		\$ 31	\$0
Winches - Sliding - 3 Bar #14011NP (hooks not included)	13		\$ 48	\$0
<b>PAINT</b>				
BWS Red - PPG#911722	0		\$ 416	\$0
BWS Yellow - PPG#920612	0		\$ 416	\$0
<b>RAMPS</b>				
* 38 in. x 76 in. Air Operated Self Cleaning	-45		\$ 103	\$0
* 45 in. x 96 in. Bi Fold Air Operated Planked	1,900		\$ 4,609	\$0
* 45 in. x 76 in. Air Operated Planked	80		\$ 188	\$0
<b>SUSPENSION/AXLES</b>				
Air Ride Suspension (includes air gauge and dump valve)	468		\$ 3,720	\$0
Alum. Wheel Pkg. 17.5 (8 polished)	-192		\$ 1,597	\$0
Alum. Wheel Pkg. 17.5 (4 steel, 4 polished)	-96		\$ 1,009	\$0
Tire Upgrade to 235/75R17.5	98		\$ 245	\$0
<b>TOTALS</b>				<b>\$0</b>

<b>MODEL 20NTT</b>	
<b>STANDARD SPECIFICATIONS</b>	
<b>TRAILER</b>	
Overall Length	32 ft. 8 in.
Overall Width	102 in.
Weight lbs +/- 2%	7,960
A-Frame	6 ft. 11 in. Hi-Tensile Cold Formed Wide Flange Beam
Hitch	3 in. pintle eye, adjustable 5 position 23 1/2 in. to 32 1/2 in.
<b>DECK</b>	
Deck Length	20 ft.
Loaded Deck Height	34 in.
Main Frame	Hi-Tensile Wide Flange 14 in. @ 22
Cross Members	Hi-Tensile 5 in. Channel @ 6.7
Side Rail	Hi-Tensile 7 in. Channel @ 9.8 open on inside
Floor	1 3/4 in. Hardwood with 3/16 in. deck plate over the wheels
Landing Gear	Single Drop Leg Single Speed
<b>SUSPENSION/AXLES</b>	
Axles	25,000 lbs Capacity 77.5 in. Track 3/4 in. wall
Spread	49 in.
Suspension	Hutch 9700 spring ride
Brakes	Quick Change 12 1/4 in. x 7 in.
Brake Chamber	#3030, All Axles
Air Brake System	2S/1M
Bearings	Oil Bath
Slack Adjusters	Automatic
Hubs & Drums	8 Stud Unimount C / W Cast Drums
Tires	215/75R17.5
Wheels	6.75 x 17.5 Steel Disc - Painted White
<b>BEAVERTAIL</b>	
Length	5 ft. @ 10 degree slope, Planked in
<b>RAMPS</b>	
Length	19 in. x 60 in. Spring assist, self cleaning, adjustable total width 99 in. max./ 68 in. min.
<b>GENERAL SPECIFICATIONS</b>	
Electrical System	Modular, Vapor Proof GROTE Ultra Blue
Lights	LED CMVSS 108 / FMVSS 108
Front Connector	SAE J560 7 Pin
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked
Color	Black
Load Securement	4 per side
Toolbox	Standard Mesh - No Cover
GVWR Rating is based on standard configuration and a 15% Tongue weight distribution	

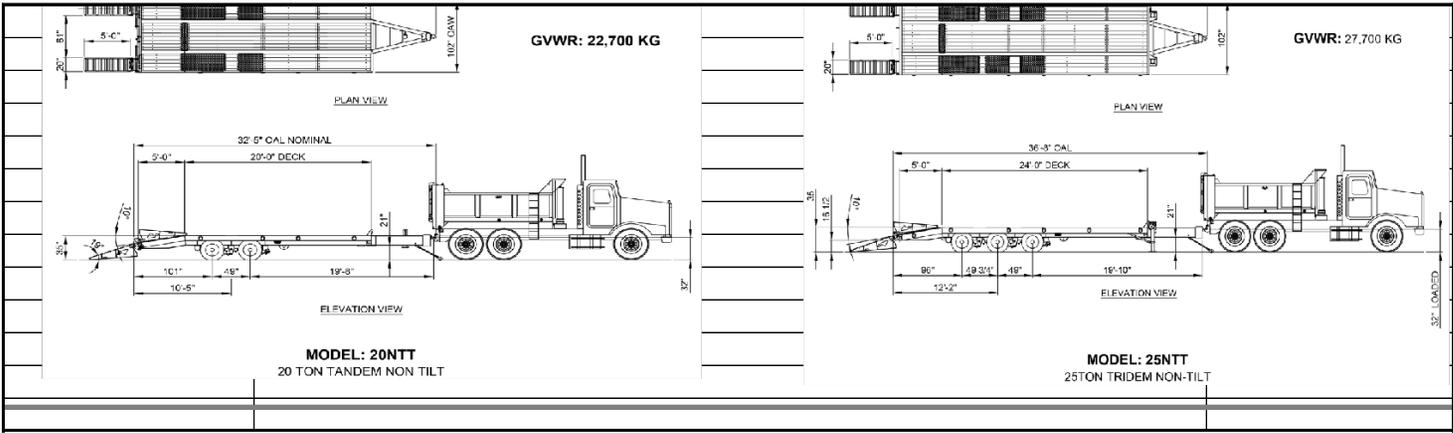

	Weight	Qty	Price	Total
<b>20NTT - 20 Ton Non Tilt Tandem</b>	7,960		\$22,072	0
				\$0
<b>ACCESSORIES</b>				\$0
1 ft. Bolt On A-Frame Extension	100		\$493	\$0
Bolt on A-Frame Mounted Toolbox	40		\$414	\$0
Dual Holland Mark V 2 Speed Landing Gear	210		\$56	\$0
Frame Mounted Deck Plate Cover	50		\$234	\$0
Mudflaps with Brackets (Pair)	12		\$188	\$0
Tire Carrier Only (A Frame Top Mount)	15		\$352	\$0
<b>DECK</b>				\$0
* 1 ft. Additional Main Deck (up to 4 extra Feet)	145		\$542	\$0
* Self Cleaning Beavertail incl. Mudflaps	-100		\$582	\$0
1 3/8 in. x 7 in. Keruing Shiplapped	0		\$888	\$0
<b>LIGHTING/ELECTRICAL</b>				\$0
Amber Flashing Strobes (Mounted in Ramps)	0		\$ 314	\$0
Four Pin Plug w/Strobe Light Pocket at Rear	5		\$151	\$0
<b>LOAD SECUREMENT DEVICES</b>				\$0
Side Mount D-Rings (pair)	9		\$90	\$0
Straps (3 in. x 30 ft. with Chain and Hook)	7		\$30	\$0
Winch Track (Road Side)	145		\$605	\$0
Winches - Sliding #5820 (hooks not included)	11		\$31	\$0
Winches - Sliding - 3 Bar #14011NP (hooks not included)	13		\$48	\$0
<b>PAINT</b>				\$0
BWS Red - PPG#911722	0		\$416	\$0
BWS Yellow - PPG#920612	0		\$416	\$0
<b>RAMPS</b>				\$0
* 38 in. x 76 in. Self Cleaning Air Operated Ramp	-45		\$2,546	\$0
* 38 in. x 76 in. Wood Filled Air Operated Ramp	80		\$2,592	\$0
<b>SUSPENSION/AXLES</b>				\$0
Air Ride Suspension (includes air gauge and dump valve)	468		\$3,720	\$0
Alum. Wheel Pkg. 17.5 (8 polished)	-192		\$1,597	\$0
Alum. Wheel Pkg. 17.5 (4 steel, 4 polished)	-96		\$1,016	\$0
Tire Upgrade to 235/75R17.5	98		\$245	\$0
<b>TOTALS</b>				<b>\$0</b>

## MODEL 25 ANR STANDARD SPECIFICATION

### TRAILER

Overall Length	37 ft. 6 in.
Overall Width	102 in.
Weight lbs +/- 2%	11,380
A-Frame	6 ft. 11 in. Hi-Tensile Cold Formed Wide Flange Beam
Hitch	3 in. pintle eye, adjustable 5 position 23 1/2 in. to 32 1/2 in.

### DECK

Deck Length	24 ft.
Loaded Deck Height	34 in.
Main Frame	Hi-Tensile Wide Flange 14 in. @ 22
Cross Members	Hi-Tensile 6 in. Channel @ 8.2
Side Rail	Hi-Tensile 8 in. Channel @ 11.5 open on inside
Air Tilt Deck	2 Air Bags
Floor	1 3/4 in. Hardwood with 3/16 in. deck plate over the wheels
Landing Gear	Dual 2 Speed
Rear	Wedge Style bumper with air assisted tilt deck for ground loading

### SUSPENSION/AXLES

Axles	25,000 lbs Capacity 77.5 in. Track 3/4 in. wall
Spread	49 in.
Suspension	Hutch 9700 spring ride
Brakes	Quick Change 12 1/4 in. x 7 in.
Brake Chamber	#3030, All Axles
Air Brake System	2S/1M
Bearings	Oil Bath
Slack Adjusters	Automatic
Hubs & Drums	8 Stud Unimount C / W Cast Drums
Tires	215/75R17.5
Wheels	6.75 x 17.5 Steel Disc - Painted White

### BEAVERTAIL



Length	6 ft. @ 8 degree slope, Self Cleaning Outside , Planked in inside
--------	---

### GENERAL SPECIFICATIONS

Electrical System	Modular, Vapor Proof GROTE Ultra Blue
Lights	LED CMVSS 108 / FMVSS 108
Front Connector	SAE J560 7 Pin
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked
Color	Black


- Mudflaps 1 set of EZ-2-LOAD at rear
- Toolbox A Frame Mounted
- Load Securement 6 per side

GVWR Rating is based on standard configuration and a 15% Tongue weight distribution

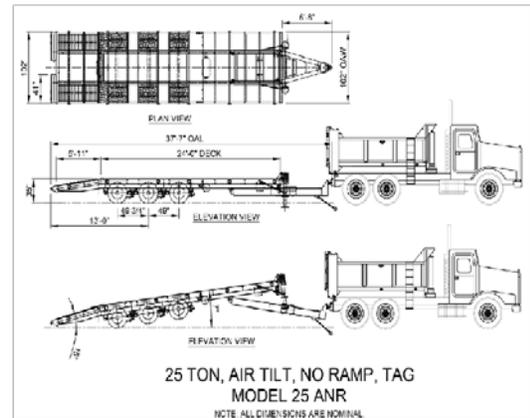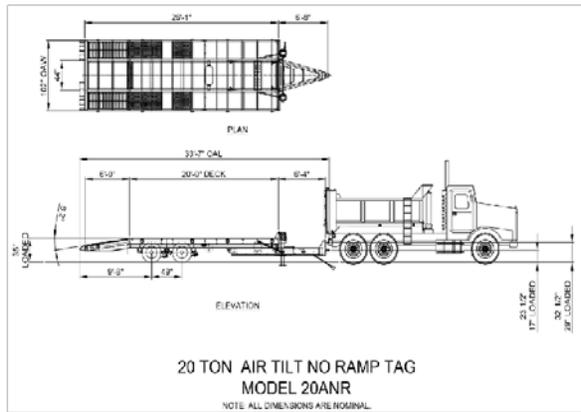


	Weight	Qty	Price	Total
<b>25 ANR - 25 Ton Air Tilt/No Ramp Tridem</b>	11,380		\$30,600	\$0
<b>ACCESSORIES</b>				
1 ft. Bolt On A-Frame Extension	100		\$493	\$0
Dual Holland Mark V 2 Speed Landing Gear	210		\$56	\$0
Mudflaps located in front of lead axle in the center	0		\$169	\$0
Mudflaps with Brackets (Pair)	12		\$188	\$0
Tire Carrier Only (A Frame Top Mount)	15		\$352	\$0
<b>DECK</b>				
* 1 ft. Additional Main Deck (up to 4 extra Feet)	145		\$517	\$0
* 114 in. width excluding load securement devices (over width permits may be required)	0		\$1,652	\$0
* 7 ft. Beavertail wood filled (Deck will be 23 ft. in lieu of 24 ft.)	460		-\$145	\$0
1 3/8 in. x 7 in. Keruing Shiplapped	0		\$914	\$0
Swingout Outriggers (6 per side)	200		\$906	\$0
<b>LIGHTING/ELECTRICAL</b>				
Amber Flashing Strobe (Mounted in Bumper)	0		\$307.00	\$0
Four Pin Plug w/Strobe Light Pocket at Rear	5		\$151	\$0
<b>LOAD SECUREMENT DEVICES</b>				
Side Mount D-Rings (pair)	9		\$90	\$0
Straps (3 in. x 30 ft. with Chain and Hook)	7		\$30	\$0
Winch Track (Road Side)	174		\$706	\$0
Winches - Sliding #5820 (hooks not included)	11		\$31	\$0
Winches - Sliding - 3 Bar #14011NP (hooks not included)	13		\$48	\$0
<b>PAINT</b>				
BWS Red - PPG#911722	0		\$416	\$0
BWS Yellow - PPG#920612	0		\$416	\$0
<b>SUSPENSION/AXLES</b>				
* Axle Spacing 61 in.	0		\$948	\$0
* Tilt Deck Package (4 Air Bags)	84		\$882	\$0
Air Lift c/w Control Box, 2 Spring Susp., 1 Air Susp.	357		\$3,607	\$0
Air Lift c/w Control Box, all Air Susp., Dump Valve and Air Gauge	825		\$7,043	\$0
Air Ride Suspension (includes air gauge and dump valve)	702		\$5,287	\$0
Alum. Wheel Pkg. 17.5 (12 polished)	-288		\$2,398	\$0
Alum. Wheel Pkg. 17.5 (6 steel, 6 polished)	-144		\$1,512	\$0
Tire Upgrade to 235/75R17.5	147		\$234	\$0
<b>TOTALS</b>				<b>\$0</b>

<b>MODEL ART</b>			
<b>STANDARD SPECIFICATIONS</b>			
<b>TRAILER</b>			
Overall Length	37 ft. 6 in.		
Overall Width	102 in.		
Weight lbs +/- 2%	12,280		
A-Frame	6 ft. 11 in. Hi-Tensile Cold Formed Wide Flange Beam		
Hitch	3 in. pintle eye, adjustable 5 position 23 1/2 in. to 32 1/2 in.		
<b>DECK</b>			
Deck Length	24 ft.		
Loaded Deck Height	34 in.		
Main Frame	Hi-Tensile Wide Flange 14 in. @ 22		
Cross Members	Hi-Tensile 6 in. Channel @ 8.2		
Side Rail	Hi-Tensile 8 in. Channel @ 11.5 open on inside		
Air Tilt Deck	2 Air Bags		
Floor	1 3/4 in. Hardwood with 3/16 in. deck plate over the wheels		
Landing Gear	Dual 2 Speed		
<b>SUSPENSION/AXLES</b>			
Axles	25,000 lbs Capacity 77.5 in. Track 3/4 in. wall		
Spread	49 in.		
Suspension	Hutch 9700 spring ride		
Brakes	Quick Change 12 1/4 in. x 7 in.		
Brake Chamber	#3030, All Axles		
Air Brake System	2S/1M		
Bearings	Oil Bath		
Slack Adjusters	Automatic		
Hubs & Drums	8 Stud Unimount C / W Cast Drums		
Tires	215/75R17.5		
Wheels	6.75 x 17.5 Steel Disc - Painted White		
<b>BEAVERTAIL</b>			
Length	6 ft. @ 6 degree slope, Planked in		
<b>RAMPS</b>			
Length	38 in. x 72 in. Air Operated Planked		
<b>GENERAL SPECIFICATIONS</b>			
Electrical System	Modular, Vapor Proof GROTE Ultra Blue		
Lights	LED CMVSS 108 / FMVSS 108		
Front Connector	SAE J560 7 Pin		
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked		
Color	Black		
Toolbox	A Frame Mounted		
Load Securement	6 per side		
	GVWR Rating is based on standard configuration and a 15% Tongue weight distribution		

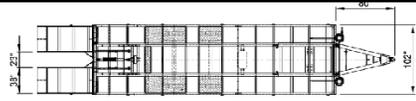


**GVWR: 22,700 KG**

PLAN VIEW

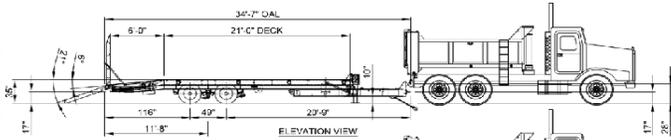


ELEVATION VIEW

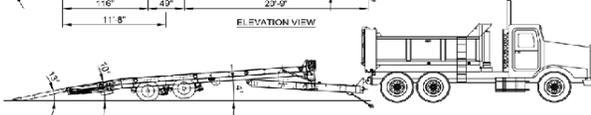


ELEVATION VIEW (TILTED)

**MODEL: 20ART**  
20 TON TANDEM AIR TILT/AIR RAMP

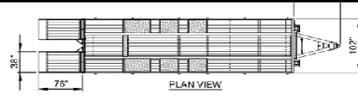

**GVWR: 28,440 KG**

PLAN VIEW

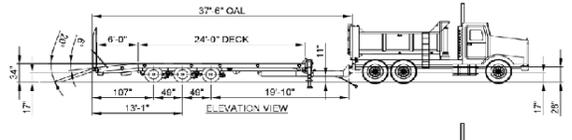

ELEVATION VIEW



ELEVATION VIEW

**MODEL: 25ART**  
25 TON, AIR RAMP, AIR TILT, TAG

	Weight	Qty	Price	Total
<b>25 ART - 25 Ton Air Tilt/Air Ramp Tridem</b>	12,280		\$ 33,407	\$ -
<b>ACCESSORIES</b>				
1 ft. Bolt On A-Frame Extension	100		\$ 493	\$ -
Dual Holland Mark V 2 Speed Landing Gear	210		\$ 56	\$ -
Mudflaps with Brackets (Pair)	12		\$ 188	\$ -
Tire Carrier Only (A Frame Top Mount)	15		\$ 352	\$ -
<b>DECK</b>				
* 1 ft. Additional Main Deck (up to 4 extra Feet)	145		\$ 535	\$ -
* 114 in. width excluding load securement devices (over width permits may be required)	0		\$ 1,414	\$ -
* 7 ft. Beavertail wood filled (Deck will be 23 ft. in lieu of 24 ft.)	460		\$ 325	\$ -
1 3/8 in. x 7 in. Keruing Shiplapped	0		\$ 1,085	\$ -
Remove Air Assist Tilt Deck Pkg.	145		\$ (310)	\$ -
Swingout Outriggers (6 per side)	200		\$ 906	\$ -
<b>LIGHTING/ELECTRICAL</b>				
Amber Flashing Strobe (Mounted in Ramps)	4		\$ 314	\$ -
Four Pin Plug w/Strobe Light Pocket at Rear	5		\$ 151	\$ -
LED City Light Package (Mounted in Planked Ramps)	20		\$ 600	\$ -
LED City Light Package (Mounted in Self Cleaning Ramps)	20		\$ 673	\$ -
<b>LOAD SECUREMENT DEVICES</b>				
Side Mount D-Rings (pair)	9		\$ 90	\$ -
Straps (3 in. x 30 ft. with Chain and Hook)	7		\$ 30	\$ -
Winch Track (Road Side)	174		\$ 706	\$ -
Winches - Sliding #5820 (hooks not included)	11		\$ 31	\$ -
Winches - Sliding 3 Bar #14011NP (hooks not included)	13		\$ 48	\$ -
<b>PAINT</b>				
BWS Red - PPG#911722	0		\$ 416	\$ -
BWS Yellow - PPG#920612	0		\$ 416	\$ -
Custom Color - Price Quote Required	0		\$ -	\$ -
<b>RAMPS</b>				
* 38 in. x 76 in. Air Operated Self Cleaning	-45		\$ 103	\$ -
* 45 in. x 76 in. Air Operated Planked	80		\$ 188	\$ -
*45 x 96 Bi-Fold Air Operated Planked (Spring Susp)	1,900		\$ 4,609	\$ -
*45 x 96 Bi-Fold Ramp c/w 1 Lift, 2 Spring Susp, 1 Air Susp	2,257		\$ 8,172	\$ -
* 45 in. x 96 in. Bi Fold Ramp c/w 1 Lift Axle, All Air Susp	2,725		\$ 11,784	\$ -
* 45 in. x 96 in. Bi Fold Ramp c/w 3 Air Susp, No Lift Axle	2,602		\$ 9,973	\$ -
<b>SUSPENSION/AXLES</b>				
* Axle Spacing 61 in.	0		\$ 948	\$ -
* Tilt Deck Package (4 Air Bags)	84		\$ 886	\$ -
Air Lift c/w Control Box, 2 Spring Susp., 1 Air Susp.	357		\$ 3,608	\$ -
Air Lift c/w Control Box, all Air Susp., Dump Valve and Air Gauge	825		\$ 7,044	\$ -
Air Ride Suspension (includes air gauge and dump valve)	702		\$ 5,287	\$ -
Alum. Wheel Pkg. 17.5 (12 polished)	-288		\$ 2,398	\$ -
Alum. Wheel Pkg. 17.5 (6 steel, 6 polished)	-144		\$ 1,512	\$ -
Tire Upgrade to 235/75R17.5	147		\$ 234	\$ -
<b>TOTALS</b>				\$ -

## MODEL 25 NTT

### STANDARD SPECIFICATIONS

#### TRAILER

Overall Length	36 ft. 7 in.
Overall Width	102 in.
Weight lbs +/- 2%	11,360
A-Frame	6 ft. 11 in. Hi-Tensile Cold Formed Wide Flange Beam
Hitch	3 in. pintle eye, adjustable 5 position 23 1/2 in. to 32 1/2 in.

#### DECK

Deck Length	24 ft.
Loaded Deck Height	34 in.
Main Frame	Hi-Tensile Wide Flange 14 in. @ 22
Cross Members	Hi-Tensile 6 in. Channel @ 8.2
Side Rail	Hi-Tensile 8 in. Channel @ 11.5 open on inside
Floor	1 3/4 in. Hardwood with 3/16 in. deck plate over the wheels
Landing Gear	Dual 2 Speed

#### SUSPENSION/AXLES

Axles	25,000 lbs Capacity 77.5 in. Track 3/4 in. wall
Spread	49 in.
Suspension	Hutch 9700 spring ride
Brakes	Quick Change 12 1/4 in. x 7 in.
Brake Chamber	#3030, All Axles
Air Brake System	2S/1M
Bearings	Oil Bath
Slack Adjusters	Automatic
Hubs & Drums	8 Stud Unimount C / W Cast Drums
Tires	215/75R17.5
Wheels	6.75 x 17.5 Steel Disc - Painted White

#### BEAVERTAIL

Length	5 ft. @ 10 degree slope, Planked in
--------	-------------------------------------

#### RAMPS



Length	19 in. x 60 in. Spring assist, self cleaning, adjustable total width 99 in. max./ 68 in. min.
--------	---

#### GENERAL SPECIFICATIONS

Electrical System	Modular, Vapor Proof GROTE Ultra Blue
Lights	LED CMVSS 108 / FMVSS 108
Front Connector	SAE J560 7 Pin
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked
Color	Black

Toolbox                      Standard Mesh - No Cover  
 Load Securement        6 per side



GVWR Rating is based on standard configuration and a 15% Tongue weight distribution

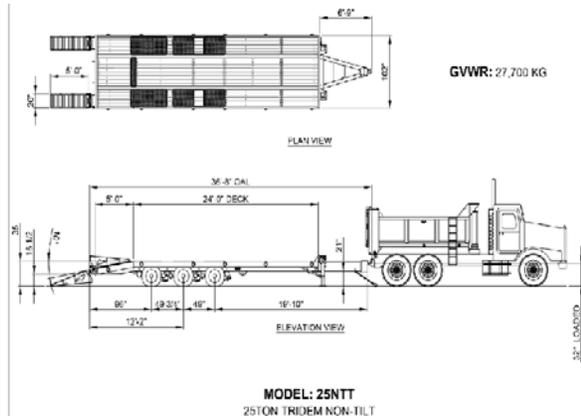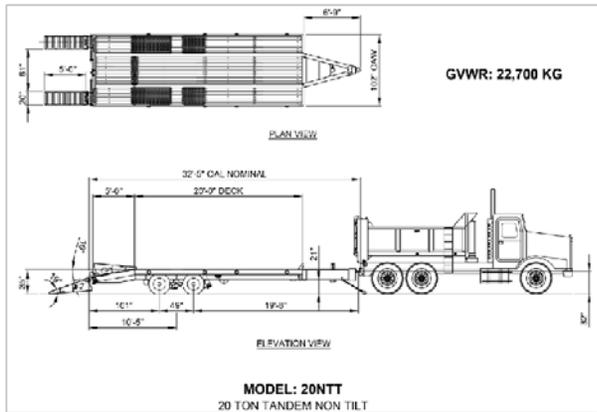

	Weight	Qty	Price	Total
<b>25NTT - 25 Ton Non Tilt Tridem</b>	11,360		\$28,866	\$0
<b>ACCESSORIES</b>				
1 ft. Bolt On A-Frame Extension	100		\$493	\$0
Bolt on A-Frame Mounted Toolbox	40		\$414	\$0
Dual Holland Mark V 2 Speed Landing Gear	210		\$56	\$0
Frame Mounted Deck Plate Cover	50		\$234	
Mudflaps with Brackets (Pair)	12		\$188	\$0
Tire Carrier Only (A Frame Top Mount)	15		\$352	\$0
<b>DECK</b>				
* 1 ft. Additional Main Deck (up to 4 extra Feet)	145		\$553	\$0
* 114 in. width excluding load securement devices (over width permits may be required)	0		\$1,499	\$0
* Self Cleaning Beavertail incl. Mudflaps	-100		\$582	\$0
1 3/8 in. x 7 in. Keruing Shiplapped	0		\$1,051	\$0
<b>LIGHTING/ELECTRICAL</b>				
Amber Flashing Strobe (Mounted in Bumper)	0		\$314.00	\$0
Four Pin Plug w/Strobe Light Pocket at Rear	5		\$151	\$0
<b>LOAD SECUREMENT DEVICES</b>				
Side Mount D-Rings (pair)	9		\$90	\$0
Straps (3 in. x 30 ft. with Chain and Hook)	7		\$30	\$0
Winch Track (Road Side)	174		\$706	\$0
Winches - Sliding #5820 (hooks not included)	11		\$31	\$0
Winches - Sliding - 3 Bar #14011NP (hooks not included)	13		\$48	\$0
<b>PAINT</b>				
BWS Red - PPG#911722	0		\$416	\$0
BWS Yellow - PPG#920612	0		\$416	\$0
<b>RAMPS</b>				
* 38 in. x 76 in. Self Cleaning Air Operated Ramp	-45		\$2,888	\$0
* 38 in. x 76 in. Wood Filled Air Operated Ramp	80		\$3,088	\$0
<b>SUSPENSION/AXLES</b>				
* Axle Spacing 61 in.	0		\$948	\$0
Air Lift c/w Control Box, 2 Spring Susp., 1 Air Susp.	357		\$3,608	\$0
Air Lift c/w Control Box, all Air Susp., Dump Valve and Air Gauge	825		\$7,044	\$0
Air Ride Suspension (includes air gauge and dump valve)	702		\$5,287	\$0
Alum. Wheel Pkg. 17.5 (12 polished)	-288		\$2,398	\$0
Alum. Wheel Pkg. 17.5 (6 steel, 6 polished)	-144		\$1,512	\$0
Alum. Wheel Pkg. 22.5 (6 machined, 6 polished)	-336		\$2,270	\$0
Alum. Wheel Pkg. 22.5 (6 steel, 6 polished)	-168		\$1,199	\$0
Tire Upgrade to 235/75R17.5	147		\$234	\$0
Tire Upgrade to 255/70R22.5	249		\$884	\$0
<b>TOTALS</b>				<b>\$0</b>

<b>MODEL 53ET3XP</b>	
<b>STANDARD SPECIFICATIONS</b>	
<b>TRAILER</b>	
Overall Length	53 ft.
Overall Width	102 in.
Weight lbs +/- 2%	18,540
<b>GOOSENECK</b>	
Coupler	Weld in King Pin
Coupler Plate	5/16 in. Hi-Tensile, 48 in. Height
Coupler Location	18 in.
Length	10 ft. 6 in.
Cross Members	Hi-Tensile 4 in. Jr. I-beam @ 16 in. O/C
Swing Clearance	83 in.
Floor	1 1/8 in. Shiplapped Apitong/Keruing
Web	1/4 in. Hi-Tensile
<b>DECK</b>	
Deck Length	35 ft. 1 in.
Loaded Deck Height	35 in.
Main Frame	3/8 in. x 5 in. Top Flange and 1/2 in. x 5 in. Bottom 100 KSI
Cross Members	Hi-Tensile Standard 4 in. I-beam @ 12 in. O/C on Lower Deck w/ Knee Braces
Side Rail	6 in. @ 8.2 Channel
Web	3/16 in. Hi-Tensile
Landing Gear	Dual 2 Speed
Floor	1 3/8 in. Shiplapped Apitong/Keruing with 3/16 in. Deckplate over the wheels
In Floor Chain Box	1 - located at rear of Gooseneck, 1 - located at rear of main deck
<b>SUSPENSION/AXLES</b>	
Axles	25,000 lbs Capacity
Spread	61 in.
Suspension	Ridewell RAR 240 U/S 6 1/2 in. Air Ride 25,000 lbs - includes air gauge and dump valve in enclosure
Brakes	Quick Change 12 1/4 in. x 7 in.
Brake Chamber	#3030, All Axles
Air Brake System	2S/1M
Slack Adjusters	Automatic
Camshafts	28 Spline Non Enclosed
Hubs & Drums	8 Stud Unimount C / W Cast Drums
Tires	235/75R17.5 18 Ply
Wheels	6.75 x 17.5 Steel Disc - Painted White
<b>BEAVERTAIL</b>	
Length	6 ft. @ 8 degree slope, Planked
<b>RAMPS</b>	
Rear	45 in X 10 ft. Air Operated Bi Fold - Planked
Main Deck to G/N	5 ft. Inset Full width Air Operated - Planked
<b>GENERAL SPECIFICATIONS</b>	

Electrical System	Modular, Vapor Proof GROTE Ultra Blue	
Lights	LED CMVSS 108 / FMVSS 108	
Front Connector	SAE J560 7 Pin	
Rear Connector	4 Pin Plug	
Finishing	Preparation by Steel Shot Blast, Commercial / Industrial Topcoat, Oven Baked	
Color	Black	
Mudflaps	1 set of EZ-2-LOAD at rear	
Load Securement	D Rings - 2 pr. G/N, 2pr B/T, 10 pr. Main deck side mount, evenly space	

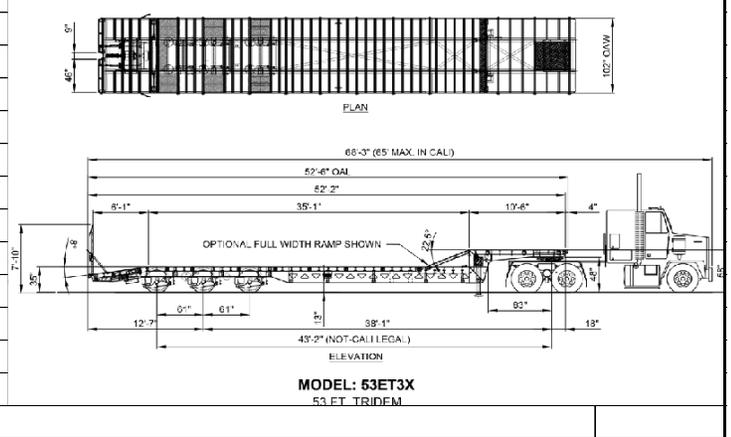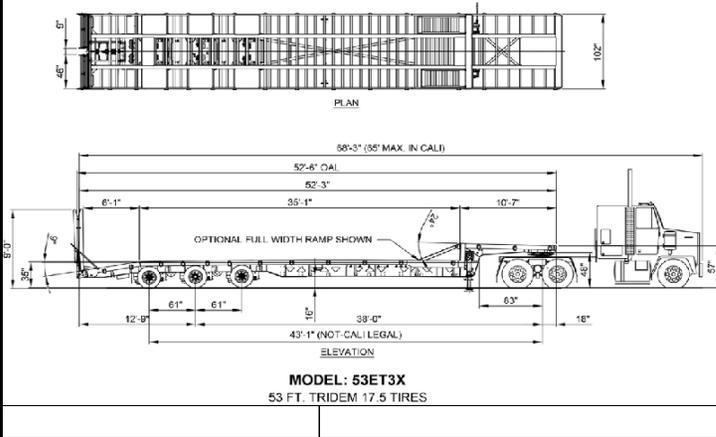

	Weight	Qty	Price	Total
<b>53ET3XP</b>	18,540		\$58,260	\$0
<b>ACCESSORIES</b>				
Additional Mudflaps with Brackets (pair)	12		\$146	\$0
Fixed D Sign (located on underside of ramp)	12		\$346	\$0
Tire Carrier Only	67		\$109	\$0
Toolbox Alum. (45 in. X 18 in. X 18 in.) + Brackets	100		\$990	\$0
<b>DECK</b>				
* 114 in. width excluding load securement devices (over width permits may be required)	980		\$1,392	\$0
* 120 in. width excluding load securement devices (over width permits may be required)	1,340		\$2,690	\$0
<b>GOOSENECK</b>				
*15,000 lbs Electric Winch with 90 ft. of Cable c/w 2 Lead Live Roll - Located on top of GNK	150		\$4,104	\$0
*15,000 lbs Electric Winch with 90 ft. of Cable c/w Lead Live Roll - Located in Kick	120		\$3,634	\$0
20,000 lbs Hydraulic Winch with 90 ft cable located on front of Gooseneck with Live/lead roll and Gooseneck mounted control valve	750		\$9,468	\$0
Bolt on Roller Stop (with D sign storage beneath)	100		\$478	\$0
<b>LIGHTING/ELECTRICAL</b>				
Amber Flashing Strobe (Mounted in Ramps)	4		\$305	\$0
LED 4 in. Wide Load Lights pullout style (Set of 4)	64		\$1,348	\$0
LED Light Enhancement Package (6 additional lights per side)	2		\$517	\$0
LED Wide Load Lights 2 1/2 in. Swing Out Style (Set of 4)	64		\$1,152	\$0
<b>LOAD SECUREMENT DEVICES</b>				
* In Floor Flush Mounted D-Rings (pair)	22		\$178	\$0
Moulded rub rail and stake pockets and spools 24 in. OC. (increase width of trailer by 4 in.) Outside normal width	400		\$1,368	\$0
Moulded rub rail and stake pockets and spools 24 in. OC - increase width of trailer by 4 in. when adding the side mount D-ring option. Outside normal width	400		\$2,108	\$0
Moulded rub rail and side pockets and spools 24 in. OC - when adding the side mount D-ring option. inside normal width	400		\$1,978	\$0
Moulded rub rail and stake pockets and spools 24 in. OC - Inside normal width, no D-Rings	400		\$1,416	\$0
Moulded rub rail and stake pockets and spools 48 in. OC - (Increase width of trailer by 4 in.) - Outside normal width, no D-rings	350		\$1,324	\$0
Moulded rub rail and stake pockets and spools 48 in. OC - (Increase width of trailer by 4 in.) when adding side mount D-ring option - Outside normal width	350		\$2,372	\$0
Chain Pull Outs (pair)	6		\$144	\$0
Flatbar full length of deck and between wheel curbside 10 in. from siderail 1/4 x 2-1/2	200		\$191	\$0
Heavy duty rub rail 3/8 in. in lieu of molded rubrail	100		\$659	\$0
Load Securement C-Hooks for side mount installation	1		\$26	\$0
Load Securement G-Hooks for under mount installation	1		\$25	\$0
Load Securement J-Hooks	1		\$25	\$0
Side Mount D-Rings (pair)	9		\$86	\$0
Winches (3 Bar Weld On) #14001NP side mount (hooks not included)	15		\$71	\$0
Winches (3 Bar Weld On) #14006NP Undermount (hooks not included)	16		\$71	\$0
<b>PAINT</b>				
BWS Red - PPG#911722	0		\$970	\$0
BWS Yellow - PPG#920612	0		\$970	\$0
<b>RAMPS</b>				
* 12 ft. Full Width Air Operated Ramp to Access Gooseneck	500		\$2,563	\$0
<b>SUSPENSION/AXLES</b>				
* Axle Spacing 49 in.	0		\$400	\$0
* Axle Spacing 72 in. - Changes beavertail to 5Ft	0		\$400	\$0
Air Lift c/w Control Box	123		\$1,889	\$0
Air Lift c/w Control Box for 114 in. width	123		\$1,889	\$0
Alum. Wheel Pkg. 17.5 (12 polished)	-288		\$2,320	\$0

Alum. Wheel Pkg. 17.5 (6 steel, 6 polished)	-144		\$1,464	\$0
Alum. Wheel Pkg. 22.5 (6 machined, 6 polished)	-336		\$2,165	\$0
Alum. Wheel Pkg. 22.5 (6 steel, 6 polished)	-168		\$1,144	\$0
Dual Holland Mark V 2 Speed Landing Gear	210		\$102	\$0
Heavy Duty Fenders (17.5)	398		\$424	\$0
Heavy Duty Fenders (17.5) w/ Grouser Bars	448		\$731	\$0
Upgrade to 255/70R22.5 Tires and 10 stud Unimount Rims/Axles with Heavy Duty Fenders and Grouser Bars	840		\$954	\$0
Upgrade to 255/70R22.5 Tires and 10 stud Unimount Rims/Axles with Heavy Duty Fenders and NO Grouser Bars	840		\$582	\$0
<b>TOTALS</b>				<b>\$0</b>