

State of Minnesota
PRICING PAGE -
METHOD # 2
 (Typed Responses Required)

Price quote for: **Municipal Utility Tractor**

Vendor Name: **Trenchers Plus, Inc.**
 Contact Person: **John Rabideaux**
 Street Address: **2309 Highway 13 W.**
 P.O. Box:
 City, State, Zip: **Burnsville, MN 55337**
 Phone #: **952-890-6000**
 Toll Free #:
 Fax #: **952-890-4563**
 Email Address: john@trenchersplus.com

1.0	Manufacturer	Multione America
	Warranty	24 Months or 1000 Hours
	Discount to be applied to Price List	10%
	Date & I.D. of Price List	VALID FROM DECEMBER 5, 2018

Complete set of Manuals (service, parts, & operations) per model(s) submitted.	Price
Download manuals available at no cost!	\$0.00

2.0	Performance/Warranty Options:	
	Use this section to offer performance/warranty options and include cost.	Price
2.1	Trenchers Plus shop rate per hour	\$110.00
2.2		
2.3		

3.0	EXTENDED WARRANTY OPTIONS	
	Use this section to offer performance/warranty options, number these items starting with 2.1, 2.2, 2.3, etc. (Specify years, miles or hours extended term covers.)	
	Price:	NA

4.0	DELIVERY CHARGES - SEE SPECIAL TERMS AND CONDITIONS	NO FLAT RATE ALLOWED
	DELIVERY STARTING POINT - City, State, Zip	Burnsville, MN 55337
	PRICE PER LOADED MILE	No Charge

5.0	NEW EQUIPMENT RENTAL PROGRAM	
	If rental programs are available on the new equipment	
	Weekly Rental Rate:	\$
	Monthly Rental Rate:	\$
	Percent (%) of Rental Fee applied to purchase price:	100%

If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____

6.0	VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM	
	See Solicitation Special Terms and Conditions.	
	DEDUCT cost per Used Hour from the original Contract Price	\$ 15.00

7.0	INSTALLATION - PER HOUR (Hourly Shop Rate)	\$ 110 /Hour
	(See Special Terms and Conditions)	

Price quote for:

Municipal Utility Tractor Attachments

Vendor Name: **Trenchers Plus, Inc.**
Contact Person: **John Rabideaux**
Street Address: **2309 Highway 13 W.**
P.O. Box:
City, State, Zip: **Burnsville, MN 55337**
Phone #: **952-890-6000**
Toll Free #:
Fax #: **952-890-4563**
Email Address: john@trenchersplus.com

Version of Excel used:

1.0	Manufacturer	Multione America
	Warranty	12 Months
	Discount to be applied to Price List	8%
	Date & I.D. of Price List	Dec 2018 Price Book
	Delivery Starting Point	Burnsville, MN 55337
	Price per loaded mile	No Charge
	Price of manuals (service, parts, & operations)	NO Charge
2.0	Performance/Warranty Options: Use this section to offer performance/warranty options and include cost.	Price
2.1		
2.2		
2.3		
3.0	INSTALLATION - PER HOUR (Hourly Shop Rate) (See Special Terms and Conditions)	<u>\$110</u>

MULTI 1 ONE

LOADERS AND OPTIONS - R.185 - USA

RETAIL PRICE LIST

VALID FROM DECEMBER 05, 2018



GLOSSARY

Tipping load, Max	It's the maximum load that can be lifted just off the ground when the machine is straight, with rear weights and on firm, level ground. Boom not extended. Weight of attachment included, the tipping load is the value indicated minus the weight of the attachment.
Lifting capacity straight	It's the maximum load that can be lifted when the machine is straight on firm level ground, with rear weights and boom not extended. Weight of attachment included, the net lifting load is the value indicated minus the weight of the attachment. It's 80% of tipping load.
Lifting capacity fully articulated	It's the maximum load that can be lifted when the machine is fully articulated on firm level ground, with rear weights and boom not extended. Weight of attachment included, the net lifting load is the value indicated minus the weight of the attachment.
Max lift height	It's the height of the coupling plate pivot point with extended boom.
Breakout force / 50 cm	Rollback force measured at 500 mm from the pivot point, max value.
Pushing force	Calculated pushing force of the machine with 100% efficiency.

Note: If not specified, all dimensions have been taken with standard tires.

TABLE OF CONTENTS

2 SERIES.....	2
2 SERIES - FEATURES AND OPTIONS.....	3
4 SERIES.....	4
4 SERIES - FEATURES AND OPTIONS.....	5
5 SERIES.....	6
5 SERIES - FEATURES AND OPTIONS.....	7
6 SERIES.....	10
6 SERIES - FEATURES AND OPTIONS.....	11
7.2.....	14
7.2 - FEATURES AND OPTIONS.....	15
7.3 + - 7.3S.....	16
7.3+ - 7.3S - FEATURES AND OPTIONS.....	17
8 SERIES.....	20
8 SERIES - FEATURES AND OPTIONS.....	21
9.5.....	24
9.5 FEATURES AND OPTIONS.....	25
9.6.....	28
9.6 FEATURES AND OPTIONS.....	29
10.9.....	32
10.9 FEATURES AND OPTIONS.....	33
SD SERIES.....	36
SD SERIES FEATURES AND OPTIONS.....	37
9.5 SD.....	40
9.5 SD FEATURES AND OPTIONS.....	41
12 SERIES.....	44
12 SERIES FEATURES AND OPTIONS.....	45
WHEELS AND TIRES.....	48
OPTIONS.....	50
GENERAL CONDITIONS OF SALES.....	58

2 SERIES

<http://tiny.cc/multione2-2EN>


 ENGINE POWER	 SPEED	 FLOW RATE	 LIFT HEIGHT
25 hp	9.3 mph	11.1 GPM	63 in

Tires size	Width (N)	Height (Q)
20x8.00-10	1035 mm (40.7 in)	1948 mm (76.7 in)
23x8.50-12	1048 mm (41.2 in)	1986 mm (78.2 in)

Model	2.3 (25HP - 3 pumps - 9.3 mph)
Engine	B&S Vanguard 8270
Power (Iso Gross)	25 HP
Fuel	Petrol
Fuel tank capacity	36 l (9.5 gal)
Max fuel consumption at max power	6,36 l/h (1,68 GPH)
Transmission	Hydrostatic
Drive speed (max.)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	42 l/min (11.1 GPM)
Hydraulic oil tank capacity	19 l (5 gal)
Max. lifting height	1,6 m (63 in)
Tipping load, max (1)	530 kg (1168 lbs)
Lifting capacity straight (2)	420 kg (926 lbs)
Lifting capacity fully articulated (3)	340 kg (750 lbs)
Breakout force / 50 cm (19.7 in)	500 kg (1102 lbs)
Pushing force (c)	800 kgf (800 kp)
Specific ground pressure (w/standard tires)	610 kg/m ² (125 lbs/sqft)
Turning radius: inside/outside	700 / 1698 mm (27.6 / 66.9 in)
Standard tires (Tractor profile)	20x8.00-10
Weight	700 kg (1543 lbs)
Product Code	C951030
Price	21,800.00 \$

Features


- B&S - 25 HP, 2 cylinders, air cooled engine
- 3 pumps system, independent circuits
- Aux. hydraulics: 2 pumps, max 11.1 GPM
- 20x8.00-10 wheels, tractor or turf profile
- 4WD hydrostatic Direct Drive motors, proportional servo controls
- DBS (Dynamic Block System)
- Hydraulic oil cooler
- Hydraulic multiconnector
- Self-levelling H-frame boom
- 4-functions joystick
- ROPS-FOPS Level I
- 2 front working light
- Ergonomic seat with armrests and seat belt, adjustable position
- Mechanical parking brake
- Backup warning beeper

(1) Maximum load that can be lifted just off the ground when the machine is straight, with rear weights. Weight of attachment included.

(2) Machine straight with rear weights. Weight of attachment is included. (80% of tipping load).

(3) Machine fully articulated with rear weights. Weight of attachment is included.

2 SERIES - FEATURES AND OPTIONS

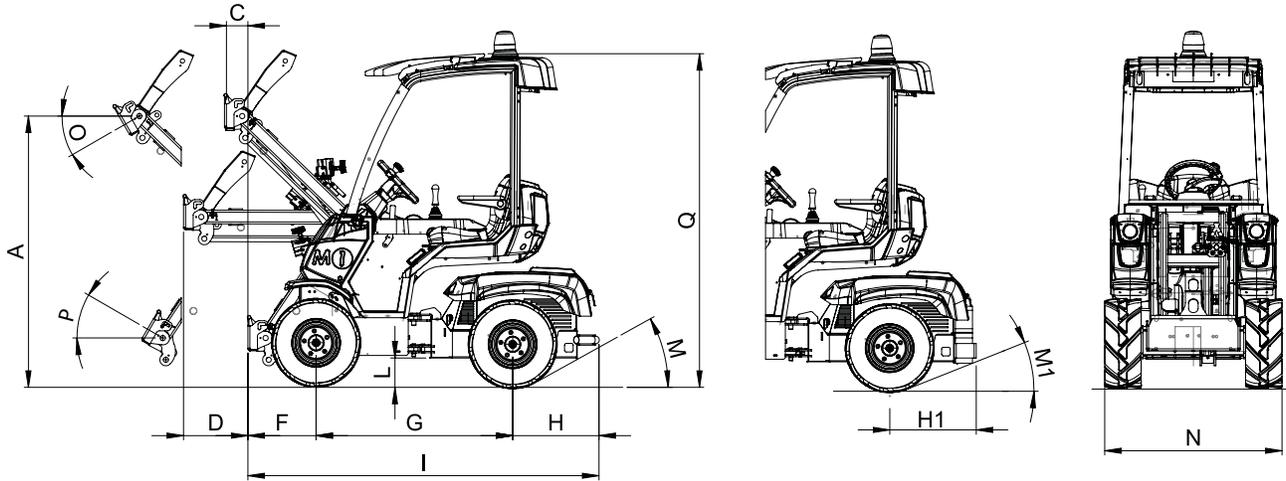

Dimensions (mm / in)

A - Pivot point height (not extended boom)	1584 / 62.3	L - Ground clearance	171 / 6.7
C - Outreach with lifted boom	125 / 4.9	M - Angle of departure	29°
D - Outreach with horizontal boom	375 / 14.7	M1 - Angle of departure with rear weights	21,5°
F - Front length	398 / 15.6	N - Max width (with standard tires)	1035 / 40.7
G - Wheelbase	1147 / 45.1	O - Dump angle	40°
H - Rear length	504 / 19.8	P - Rollback angle	39°
H1 - Rear length with rear weights	504 / 19.8	Q - Height (with standard tires)	1948 / 76.7
I - Machine length	2049 / 80.6		

Options	Code	Price
3 additional working led light	C883018	794.00 \$
3 additional working halogen light	C883064	458.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883200	444.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Fully enclosed cab with heating system and mirrors	C885224	3,640.00 \$
Turf tires 23x8.50-12, set of 4	C884006	149.00 \$
Turf profile tires 20x8.00-10, set of 4	C885211	189.00 \$
Heated seat	C885216	208.00 \$
Left protection bar for operator	C885027	605.00 \$
Plexiglass windscreen (smart cabin)	C885237	324.00 \$
Plexiglass right side (smart cabin)	C885238	306.00 \$
Plexiglass back window (smart cabin)	C885239	324.00 \$
Rear weights 84 kg (185 lbs)	C880234	580.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Trailer coupling	C885017	415.00 \$
Tractor tires 23x8.50-12, set of 4	C884005	149.00 \$
Wheel spacer 10 mm (0,4 in) (set of 4 - max. 2 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Machine packages	Code	Price
2.3 CAB&LIGHTS: Enclosed cab + Heating system + Work light kit	C951030/AS	26,234.00 \$
COMFORT: Heated seat + 3 additional working led lights	C951030/C	22,802.00 \$

4 SERIES

<http://tiny.cc/4seriesEN>


 ENGINE POWER 20 hp	 SPEED 8.7 mph	 FLOW RATE 8.2 GPM	 LIFT HEIGHT 108 in
--	---	---	--


Model	4.2 (20 HP - 8.7 mph)
Engine	Kubota D722
Power (Iso Gross)	20 HP
Fuel	Diesel
Fuel tank capacity	24 l (6.3 gal)
Transmission	Hydrostatic
Drive speed (max.)	14 km/h (8.7 mph)
Aux. hydraulics oil flow	31 l/min (8.2 GPM)
Hydraulic oil tank capacity	30 l (7.9 gal)
Max. lifting height	2,75 m (108 in)
Tipping load, max ⁽¹⁾	1020 kg (2249 lbs)
Lifting capacity straight ⁽²⁾	820 kg (1808 lbs)
Lifting capacity fully articulated ⁽³⁾	700 kg (1543 lbs)
Breakout force / 50 cm (19.7 in)	800 kg (1764 lbs)
Pushing force (c)	900 kgf (900 kp)
Specific ground pressure (w/standard tires)	815 kg/m ² (167 lbs/sqft)
Turning radius: inside/outside	890 / 1890 mm (35 / 74.4 in)
Standard tires (Tractor profile)	23x8.50-12
Weight	940 kg (2072 lbs)
Product Code	C944000
Price	27,560.00 \$

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

4 SERIES - FEATURES AND OPTIONS

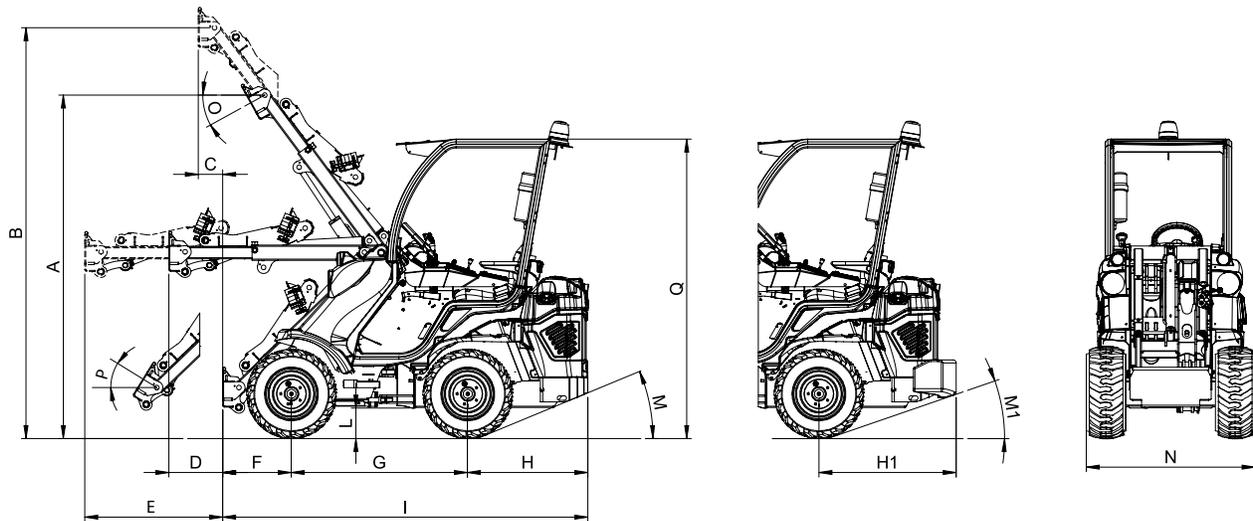

Dimensions (mm / in)

A - Pivot point height (not extended boom)	2250 / 88.6	I - Machine length	2390 / 94.1
B - Pivot point height (extended boom)	2750 / 108.3	L - Ground clearance	200 / 7.9
C - Outreach with lifted boom (extended boom)	160 / 6.3	M - Angle of departure	19°
D - Outreach with horizontal boom (not extended)	350 / 13.8	M1 - Angle of departure with rear weights	19°
E - Outreach with horizontal boom (extended)	900 / 35.4	N - Max width (with standard tires)	980 / 38.6
F - Front length	450 / 17.7	O - Dump angle	29°
G - Wheelbase	1150 / 45.3	P - Rollback angle	31°
H - Rear length	790 / 31.1	Q - Height (with standard tires)	1960 / 77.2
H1 - Rear length with rear weights	900 / 35.4		

Features

- Kubota D722 (20 HP), 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 1 pumps max. 8.2 GPM
- 4WD hydrostatic Direct Drive motors, proportional servo controls
- Hydraulic oil cooler
- Hydraulic multiconnector
- Double-H telescopic boom
- 4-functions joystick
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Seat with armrests and seat belt, adjustable position
- Mechanical parking brake
- Backup warning beeper
- 23X8.50-12 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
23x8.50-12	980 mm (38.6 in)	1960 mm (77.2 in)
23x10.50-12	1090 mm (42.9 in)	1960 mm (77.2 in)
27x8.50-15	1000 mm (39.4 in)	2010 mm (79.1 in)
26x12.00-12	1200 mm (47.2 in)	1998 mm (78.6 in)

5 SERIES

<http://tiny.cc/5seriesEN>



ENGINE POWER
28*
hp



SPEED
9.3*
mph



FLOW RATE
11.1*
GPM



LIFT HEIGHT
108
in

(*) 5.3

Model	5.2 (25 HP - 8.7 mph)	5.3 (28 HP - 9.3 mph)
Engine	Kubota D902	Yanmar 3TNV76
Power (Iso Gross)	25 HP	28 HP
Fuel	Diesel	Diesel
Fuel tank capacity	24 l (6.3 gal)	24 l (6.3 gal)
Transmission	Hydrostatic	Hydrostatic
Drive speed (max.)	14 km/h (8.7 mph)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	34 l/min (9 GPM)	42 l/min (11.1 GPM)
Hydraulic oil tank capacity	30 l (7.9 gal)	30 l (7.9 gal)
Max. lifting height	2,75 m (108 in)	2,75 m (108 in)
Tipping load, max (1)	1020 kg (2249 lbs)	1140 kg (2513 lbs)
Lifting capacity straight (2)	820 kg (1808 lbs)	900 kg (1984 lbs)
Lifting capacity fully articulated (3)	700 kg (1543 lbs)	740 kg (1631 lbs)
Breakout force / 50 cm (19.7 in)	800 kg (1764 lbs)	800 kg (1764 lbs)
Pushing force (c)	900 kgf (900 kp)	900 kgf (900 kp)
Specific ground pressure (w/standard tires)	833 kg/m ² (171 lbs/sqft)	759 kg/m ² (156 lbs/sqft)
Turning radius: inside/outside	890 / 1890 mm (35 / 74.4 in)	800 / 2000 mm (31.5 / 78.7 in)
Standard tires (Tractor profile)	23x8.50-12	23x10.50-12
Weight	960 kg (2116 lbs)	1050 kg (2315 lbs)
Product Code	C977016	C977037
Price	34,320.00 \$	38,480.00 \$


(1) Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

(2) Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

(3) Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

5 SERIES - FEATURES AND OPTIONS

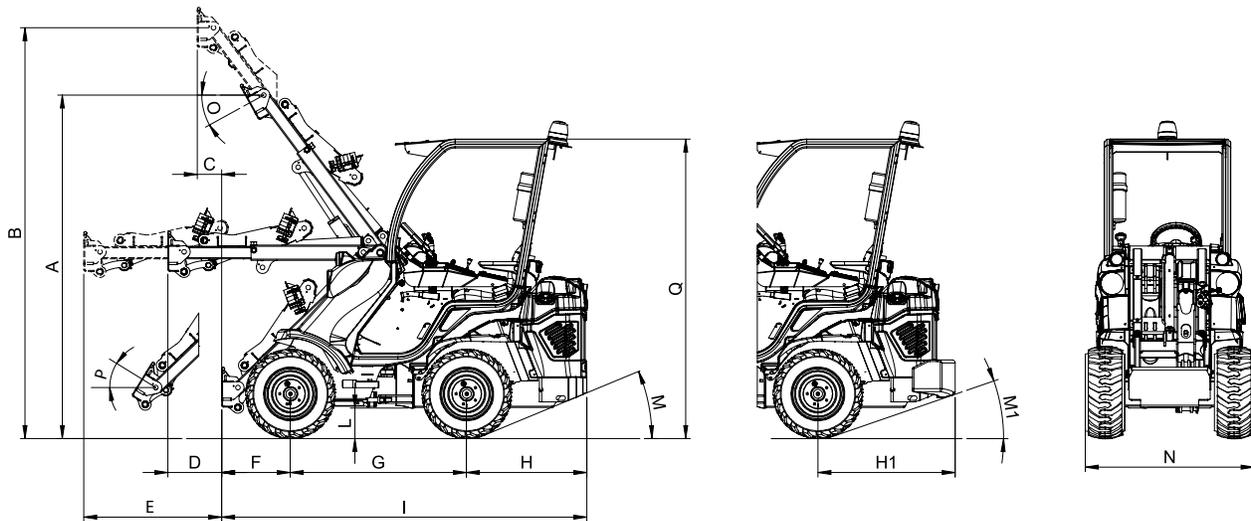

Dimensions (mm / in)

A - Pivot point height (not extended boom)	2250 / 88.6	I - Machine length	2390 / 94.1
B - Pivot point height (extended boom)	2750 / 108.3	L - Ground clearance	200 / 7.9
C - Outreach with lifted boom (extended boom)	160 / 6.3	M - Angle of departure	19°
D - Outreach with horizontal boom (not extended)	350 / 13.8	M1 - Angle of departure with rear weights	19°
E - Outreach with horizontal boom (extended)	900 / 35.4	N - Max width (with standard tires) - 5.2	980 / 38.6
F - Front length	450 / 17.7	N - Max width (with standard tires) - 5.3	1090 / 42.9
G - Wheelbase	1150 / 45.3	O - Dump angle	29°
H - Rear length	790 / 31.1	P - Rollback angle	31°
H1 - Rear length with rear weights	900 / 35.4	Q - Height (with standard tires)	1960 / 77.2

Features

- Kubota D902 (25 HP) on 5.2, Yanmar 3TNV76 (28 HP) on 5.3, 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 5.2 - 1 pumps max. 9 GPM, 5.3 - 2 pumps max. 11.1 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors, proportional servo controls
- Hydraulic oil cooler
- Hydraulic multiconnector
- Self-levelling double-H telescopic boom
- 11-functions joystick (only 5.3)
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Seat with armrests and seat belt, adjustable position
- Mechanical parking brake
- Dynamic Block System (DBS)
- Backup warning beeper
- 5.2: 23X8.50-12 wheels, tractor or turf profile
- 5.3: 23X10.50-12 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
23x8.50-12	980 mm (38.6 in)	1960 mm (77.2 in)
23x10.50-12	1090 mm (42.9 in)	1960 mm (77.2 in)
27x8.50-15	1000 mm (39.4 in)	2010 mm (79.1 in)
26x12.00-12	1200 mm (47.2 in)	1998 mm (78.6 in)

4 - 5 SERIES - FEATURES AND OPTIONS

Options	Code	Price
2 inch receiver hitch	C883062	173.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets (only 5.3)	C883503	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883058	808.00 \$
Driver area cover	C880049	122.00 \$
110 V engine block heater	C885255	210.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve (only 5 series)	C885223	998.00 \$
Floating boom valve for 4.2 without self-leveling boom	C883401	382.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883510	5,958.00 \$
Turf tires 23x10.50-12 ET-25, set of 4	C884008	215.00 \$
Turf tires 23x8.50-12, set of 4	C884006	149.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Heated seat	C885216	208.00 \$
Heating system	C885205	1,568.00 \$
Left protection bar for operator	C885026	605.00 \$
Multifunction joystick (only 4.2 and 5.2)	C883061	1,505.00 \$
Plexiglass back window (smart cabin)	C883508	363.00 \$
Plexiglass right side (smart cabin)	C883507	376.00 \$
Plexiglass windscreen (smart cabin)	C883506	402.00 \$
Rear 12V electric socket	C883022	202.00 \$
Rear bull bar	C883047	344.00 \$
Rear hydraulic outlets - double	C883502	942.00 \$
Rear hydraulic outlets - single	C883501	808.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$


Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

4 - 5 SERIES - FEATURES AND OPTIONS

Options	Code	Price
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Torque divider	C883004	1,278.00 \$
Tractor tires 23x10.50-12 ET-25, set of 4	C884007	240.00 \$
Tractor tires 23x8.50-12, set of 4	C884005	149.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4	C884009	538.00 \$
Trailer coupling	C885014	415.00 \$
Warning & Safety lights for road travel (with mirrors)	C883511	1,346.00 \$
Wheel spacer 10 mm (0,4 in) (set of 4 - max. 2 pcs for wheel)	C880090	86.00 \$

Machine packages	Code	Price	
4.2	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C944000/AS	36,472.00 \$
	COMFORT: Heated seat + 3 additional working led lights + Floating boom valve	C944000/C	28,944.00 \$
5.2	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C977016/AS	43,848.00 \$
	COMFORT: Heated seat + 3 additional working led lights + Floating boom valve	C977016/C	36,320.00 \$
5.3	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C977037/AS	48,008.00 \$
	COMFORT: Heated seat + 3 additional working led lights + Floating boom valve	C977037/C	40,480.00 \$

6 SERIES

<http://tiny.cc/6seriesEN>

 ENGINE POWER 28 hp	 SPEED 9.3* mph	 FLOW RATE 12.2 GPM	 LIFT HEIGHT 115 in
--	--	--	--

(*) 6.3S

Model	6.3+ (28 HP - 6.8 mph)	6.3S (28 HP - 9.3 mph)
Engine	Yanmar 3TNV76	
Power (Iso Gross)	28 HP	
Fuel	Diesel	
Fuel tank capacity	24 l (6.3 gal)	
Transmission	Hydrostatic	
Drive speed (max.)	11 km/h (6.8 mph)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	46 l/min (12.2 GPM)	
Hydraulic oil tank capacity	42 l (11.1 gal)	
Max. lifting height	2,92 m (115 in)	
Tipping load, max (1)	1200 kg (2646 lbs)	
Lifting capacity straight (2)	960 kg (2116 lbs)	
Lifting capacity fully articulated (3)	780 kg (1720 lbs)	
Breakout force / 50 cm	1400 kg (3086 lbs)	
Pushing force (c)	1690 kgf (1690 kp)	1160 kgf (1160 kp)
Specific ground pressure (w/standard tires)	1044 kg/m ² (214 lbs/sqft)	
Turning radius: inside/outside	905/2020 mm (35.6/79.5 in)	
Standard tires (Tractor profile)	23X8.50-12	
Weight	1430 kg (3153 lbs)	
Product Code	C961010	C961005
Price	41,000.00 \$	41,000.00 \$


Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1300 mm (51.2 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)

(1) Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

(2) Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

(3) Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

6 SERIES - FEATURES AND OPTIONS

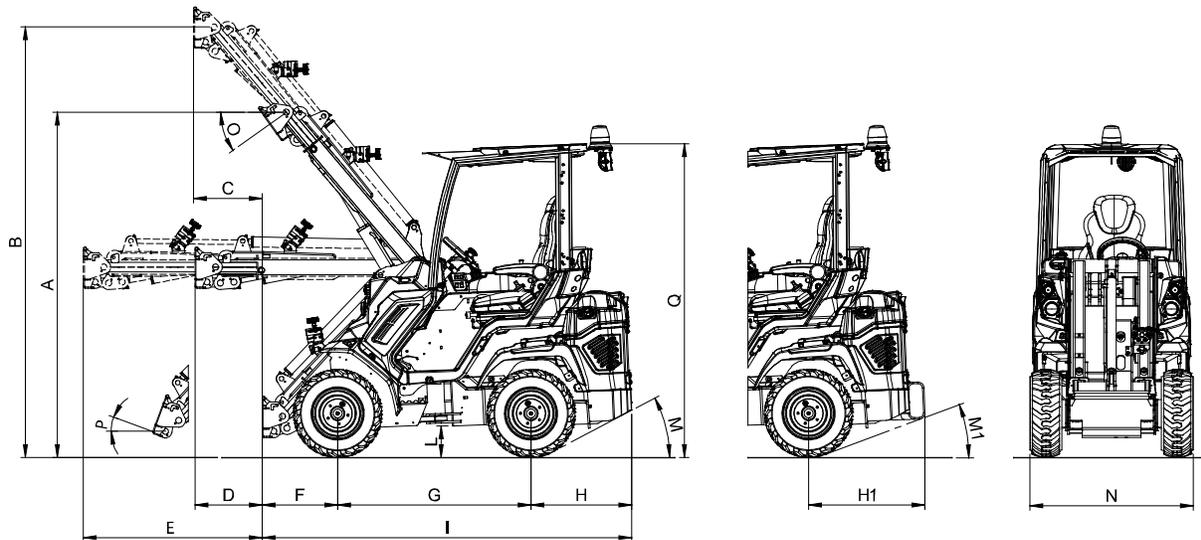

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2290 / 90.1	I - Machine length	2445 / 96.3
B - Pivot point height (extended boom)	2920 / 115	L - Ground clearance	210 / 8.3
C - Outreach with lifted boom (extended boom)	455 / 17.9	M - Angle of departure	28°
D - Outreach with horizontal boom (not extended)	445 / 17.5	M1 - Angle of departure with rear weights	24°
E - Outreach with horizontal boom (extended)	1185 / 46.6	N - Max width (with standard tires)	1070 / 42
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	665 / 26.2	Q - Height (with standard tires)	2020 / 79.5
H1 - Rear length with rear weights	770 / 30.3		

Features

- Yanmar 3TNV76 (28 HP), 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 2 pumps max. 12.2 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake, electric switch operated
- Self engaging parking brake
- Radial Piston wheel motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 23X8.50-12 wheels, tractor or turf profile

6 SERIES - FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883062	173.00 \$
3 additional working halogen light	C883064	458,00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets	C883024	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883038	1,318.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883007	605.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883011	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883001	5,919.00 \$
Turf tires 23x10.50-12 ET-25, set of 4	C884008	215.00 \$
Turf tires 23x8.50-12, set of 4	C884006	149.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Heating system	C883002	1,075.00 \$
High comfort heated seat	C883006	867.00 \$
Left protection bar for operator	C883020	605.00 \$
Plexiglass back window (smart cabin)	C883035	389.00 \$
Plexiglass right side (smart cabin)	C883034	389.00 \$
Plexiglass windscreen (smart cabin)	C883000	389.00 \$
Rear 12V electric socket	C883022	202.00 \$
Rear bull bar	C883047	344.00 \$
Rear hydraulic outlets - double	C883014	605.00 \$
Rear hydraulic outlets - single	C883013	806.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

6 SERIES - FEATURES AND OPTIONS

Options	Code	Price
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Torque divider	C883600	1,453.00 \$
Tractor tires 23x10.50-12 ET-25, set of 4	C884007	240.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4	C884009	538.00 \$
Trailer coupling	C885014	415.00 \$
Warning & Safety lights for road travel (with mirrors)	C883009	2,488.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Machine packages		Code	Price
6.3+	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C961010/AS	49,818.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C961010/C	43,481.00 \$
6.3S	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C961005/AS	49,818.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C961005/C	43,481.00 \$

7.2

<http://tiny.cc/7seriesEN>


 ENGINE POWER 28 hp	 SPEED 6.8 mph	 FLOW RATE 9.8 GPM	 LIFT HEIGHT 114 in
---	---	---	--

Model	7.2 (28 HP - 6.8 mph)
Engine	Yanmar 3TNV76
Power (Iso Gross)	28 HP
Fuel	Diesel
Fuel tank capacity	34 l (9 gal)
Transmission	Hydrostatic
Drive speed (max.)	11 km/h (6.8 mph)
Aux. hydraulics oil flow	37 l/min (9.8 GPM)
Hydraulic oil tank capacity	42 l (11.1 gal)
Max. lifting height	2,90 m (114 in)
Tipping load, max ⁽¹⁾	1500 kg (3307 lbs)
Lifting capacity straight ⁽²⁾	1200 kg (2645 lbs)
Lifting capacity fully articulated ⁽³⁾	1020 kg (2249 lbs)
Breakout force / 50 cm	1700 kg (3748 lbs)
Pushing force (c)	1690 kgf (1690 kp)
Specific ground pressure (w/standard tires)	1113 kg/m ² (228 lbs/sqft)
Turning radius: inside/outside	825 / 2090 mm (32.5 / 82.3 in)
Standard tires (Tractor profile)	23X10.50-12
Weight	1610 kg (3549 lbs)
Product Code	C962015
Price	36,400.00 \$


Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42.2 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1280 mm (50.4 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42.1 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

7.2 - FEATURES AND OPTIONS

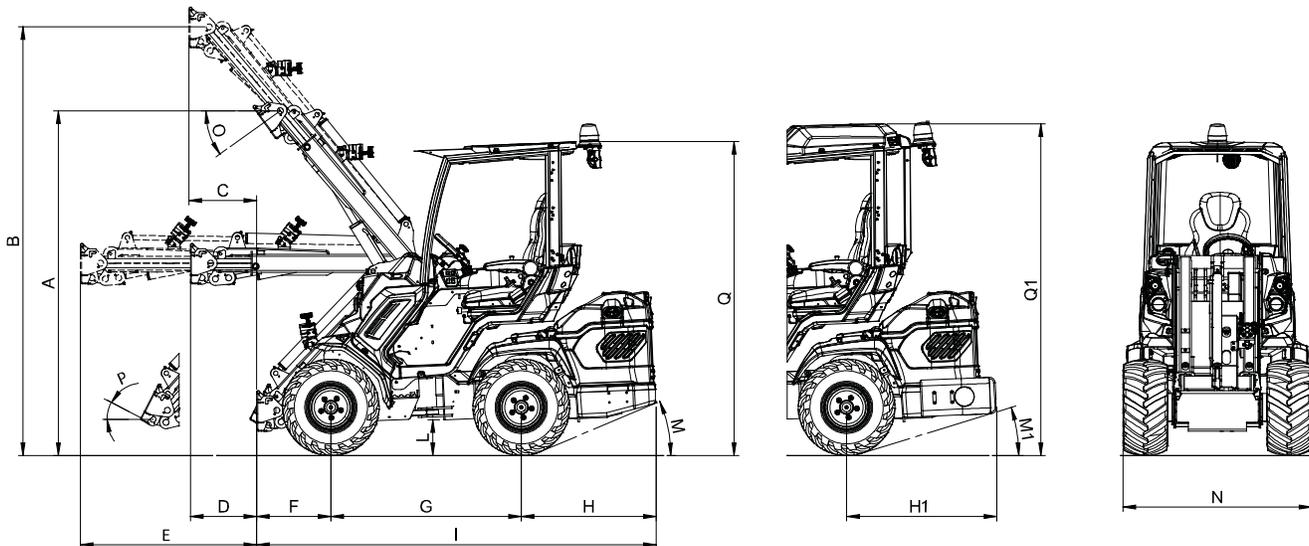

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2280 / 89.7	I - Machine length	2690 / 105.9
B - Pivot point height (extended boom)	2900 / 114	L - Ground clearance	210 / 8.3
C - Outreach with lifted boom (extended boom)	455 / 17.9	M - Angle of departure (without rear weights)	21°
D - Outreach with horizontal boom (not extended)	445 / 17.5	M1 - Angle of departure (with rear weights)	20°
E - Outreach with horizontal boom (extended)	1185 / 46.6	N - Max width (with standard tires)	1130 / 44.5
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8	Q - Height (with standard tires)	2020 / 79.5
H1 - Rear length (with rear weights)	1010 / 39.7		

Features

- Yanmar 3TNV76 (28 HP), 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 1 pumps max. 9.8 GPM
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Torque divider (optional)
- Self-levelling double-H telescopic boom
- 4-functions joystick
- Multi-disk parking brake, electric switch operated
- Self engaging parking brake
- Integrated backweight 220 kg / 485 lbs
- Radial Piston Wheel Motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 23X10.50-12 wheels, tractor or turf profile

7.3 + - 7.3S

<http://tiny.cc/7seriesEN>

 ENGINE POWER 35 hp	 SPEED 12.4* mph	 FLOW RATE 17.9* GPM	 LIFT HEIGHT 114 in
-------------------------------------	----------------------------------	--------------------------------------	-------------------------------------

(*) 7.3S

Model	7.3+ (35 hp - 6.8 mph)	7.3S (35 hp - 2 speed)
Engine	Yanmar 3TNV82	
Power (Iso Gross)	35 HP	
Fuel	Diesel	
Fuel tank capacity	34 l (9 gal)	
Transmission	Hydrostatic	
Drive speed (max.)	11 km/h (6.8 mph)	10 - 20 km/h (6.2 - 12.4 mph)
Aux. hydraulics oil flow	68 l/min (17.9 GPM)	
Hydraulic oil tank capacity	42 l (11.1 gal)	
Max. lifting height	2,90 m (114 in)	
Tipping load, max ⁽¹⁾	1550 kg (3417 lbs)	
Lifting capacity straight ⁽²⁾	1240 kg (2734 lbs)	
Lifting capacity fully articulated ⁽³⁾	1070 kg (2360 lbs)	
Breakout force / 50 cm	1700 kg (3748 lbs)	
Pushing force (c)	1690 kgf (1690 kp)	2000 kgf (2000 kp)
Specific ground pressure (w/standard tires)	1154 kg/m ² (236 lbs/sqft)	1168 kg/m ² (239 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)	
Standard tires (Tractor profile)	23X10.50-12	
Weight	1670 kg (3682 lbs)	1690 kg (3726 lbs)
Product Code	C962005	C962010
Price	47,840.00 \$	50,960.00 \$


Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42.2 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1280 mm (50.4 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42.1 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

7.3+ - 7.3S - FEATURES AND OPTIONS

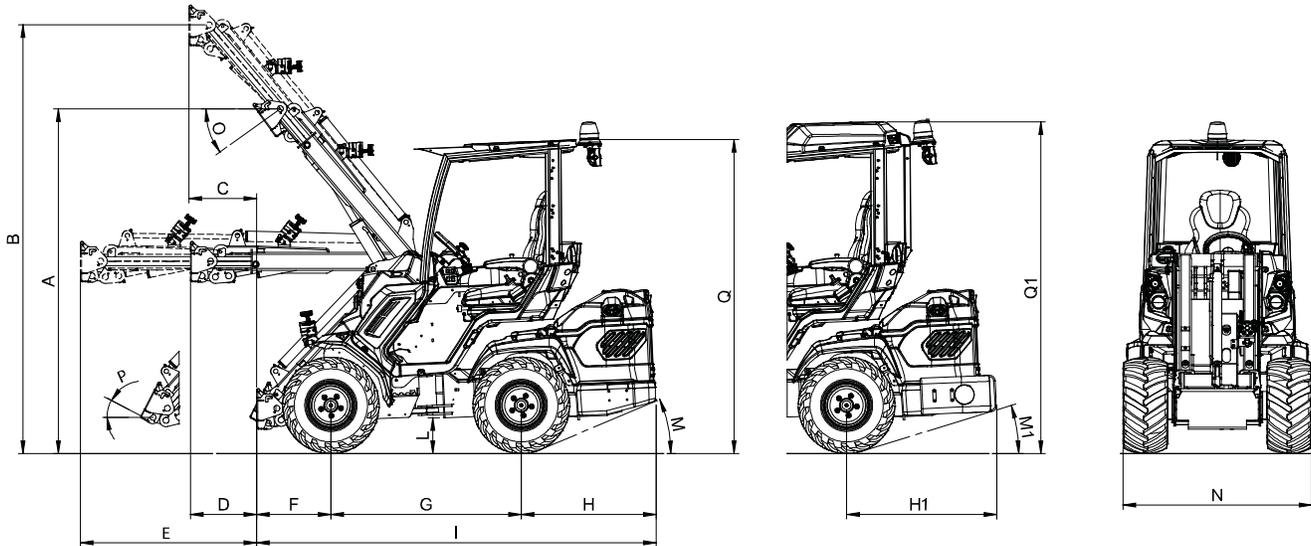

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2280 / 89.7	I - Machine length	2690 / 105.9
B - Pivot point height (extended boom)	2900 / 114	L - Ground clearance	210 / 8.3
C - Outreach with lifted boom (extended boom)	455 / 17.9	M - Angle of departure (without rear weights)	21°
D - Outreach with horizontal boom (not extended)	445 / 17.5	M1 - Angle of departure (with rear weights)	20°
E - Outreach with horizontal boom (extended)	1185 / 46.6	N - Max width (with standard tires)	1130 / 44.5
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8	Q - Height (with standard tires)	2020 / 79.5
H1 - Rear length (with rear weights)	1010 / 39.7		

Features

- Yanmar 3TNV82 (35 HP), 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 2 pumps max. 17.9 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake, electric switch operated
- Self engaging parking brake
- Integrated backweight 220 kg / 485 lbs
- Radial Piston Wheel Motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 23X10.50-12 wheels, tractor or turf profile
- 2 speed (only 7.3S)

7 SERIES - FEATURES AND OPTIONS


Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883062	173.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets (not available for 7.2)	C883024	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883038	1,318.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883007	605.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883011	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883001	5,919.00 \$
Turf tires 23x10.50-12 ET-25, set of 4	C884008	215.00 \$
Turf tires 23x8.50-12, set of 4	C884006	149.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Heating system	C883002	1,075.00 \$
High comfort heated seat	C883006	867.00 \$
Left protection bar for operator	C883020	605.00 \$
Multifunction joystick (only 7.2)	C883702	1,505.00 \$
Plexiglass back window (smart cabin)	C883035	389.00 \$
Plexiglass right side (smart cabin)	C883034	389.00 \$
Plexiglass windscreen (smart cabin)	C883000	389.00 \$
Rear 12V electric socket	C883022	202.00 \$
Rear bull bar with side extensions	C883036	470.00 \$
Rear hydraulic outlets - double	C883014	605.00 \$
Rear hydraulic outlets - single	C883013	806.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

7 SERIES - FEATURES AND OPTIONS

Options		Code	Price
Skid tires 27x8.50-15, set of 4		C884011	349.00 \$
Snow chains for wheel		see page 58	/
Tie down bracket on wheel hub, set of 4		C883065	153.00 \$
Torque divider (only 7.2)		C883600	1,453.00 \$
Tractor tires 23x8.50-12, set of 4		C884005	149.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4		C884009	538.00 \$
Trailer coupling		C885014	415.00 \$
Warning & Safety lights for road travel (with mirrors)		C883009	2,488.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)		C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4		C885010	568.00 \$
Machine packages		Code	Price
7.2	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C962015/AS	45,218.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C962015/C	38,881.00 \$
7.3+	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C962005/AS	56,658.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C962005/C	50,321.00 \$
7.3S	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C962010/AS	59,778.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C962010/C	53,441.00 \$

8 SERIES

<http://tiny.cc/8seriesEN>

 ENGINE POWER 40 hp	 SPEED 14.3* mph	 FLOW RATE 19 GPM	 LIFT HEIGHT 117.3 in
--	---	--	--

(*) 8.4S

Model	8.4+ (40 HP - 9.3 mph)	8.4S (40 HP - 2 speed)
Engine	Yanmar 3TNV88	
Power (Iso Gross)	40 HP	
Fuel	Diesel	
Fuel tank capacity	34 l (9 gal)	
Transmission	Hydrostatic	
Drive speed (max.)	15 km/h (9.3 mph)	12 - 23 km/h (7.5 - 14.3 mph)
Aux. hydraulics oil flow	72 l/min (19 GPM)	
Hydraulic oil tank capacity	42 l (11.1 gal)	
Max. lifting height	2,98 m (117.3 in)	
Tipping load, max ⁽¹⁾	1600 kg (3527 lbs)	
Lifting capacity straight ⁽²⁾	1280 kg (2822 lbs)	
Lifting capacity fully articulated ⁽³⁾	1070 kg (2360 lbs)	
Breakout force / 50 cm	1700 kg (3748 lbs)	
Pushing force (c)	2050 kgf (2050 kp)	
Specific ground pressure (w/standard tires)	1051 kg/m ² (215 lbs/sqft)	1062 kg/m ² (217 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)	
Standard tires (Tractor profile)	26X12.00-12	
Weight	1722 kg (3796 lbs)	1740 kg (3836 lbs)
Product Code	C963000	C963005
Price	50,960.00 \$	54,080.00 \$


Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42.2 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1280 mm (50.4 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42.1 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)

(¹) Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

(²) Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

(³) Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

8 SERIES - FEATURES AND OPTIONS

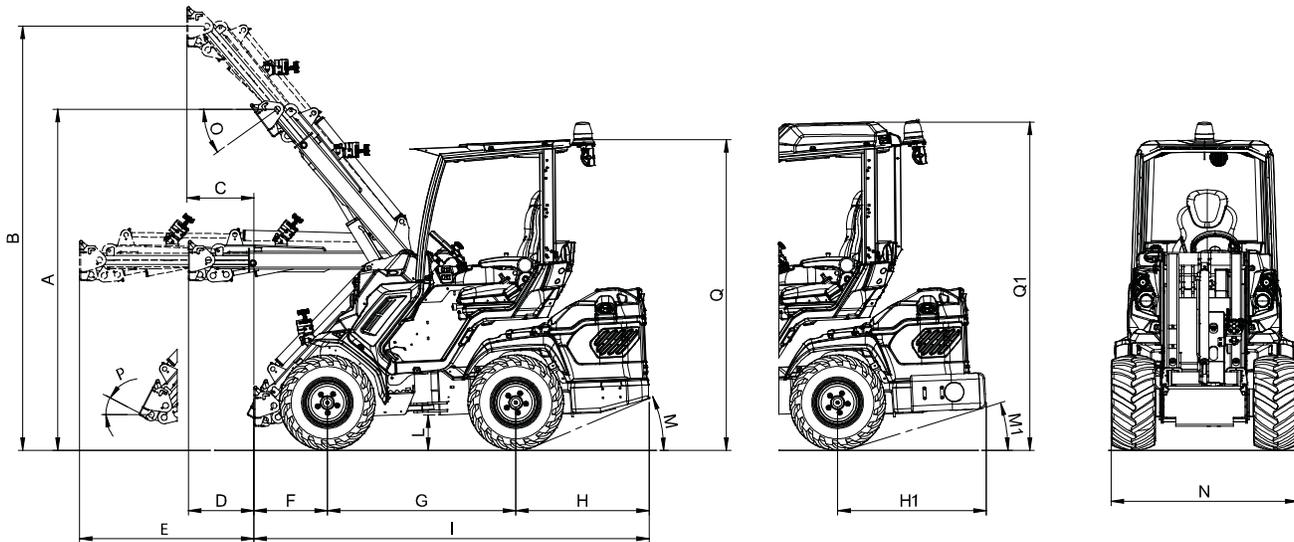

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2320 / 91.3	I - Machine length	2690 / 105.9
B - Pivot point height (extended boom)	2980 / 117.3	L - Ground clearance	240 / 9.5
C - Outreach with lifted boom	455 / 17.9	M - Angle of departure	23°
D - Outreach with horizontal boom (not extended)	445 / 17.5	M1 - Angle of departure with rear weights	22°
E - Outreach with horizontal boom (extended)	1185 / 46.6	N - Max width (with standard tires)	1280 / 50.4
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8	Q - Height (with standard tires)	2040 / 80.3
H1 - Rear length (with rear weights)	1010 / 39.7	Q1 - Height with A/C (with standard tires)	2240 / 88.2

Features

- Yanmar 3TNV88 (40 HP), 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 2 pumps max. 19 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake, electric switch operated
- Self engaging parking brake
- Integrated backweight 220 kg / 485 lbs
- Radial Piston Wheel Motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 26X12.00-12 wheels, tractor or turf profile
- 2 Speed (only 8.4S)

8 SERIES - FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883062	173.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets	C883024	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883038	1,318.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883007	605.00 \$
A/C system with heating for fully enclosed cab - for 8.4 models (C883001 required - not aftermarket)	C883800	3,056.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883011	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883001	5,919.00 \$
Turf tires 23x10.50-12 ET-25, set of 4	C884008	215.00 \$
Turf tires 23x8.50-12, set of 4	C884006	149.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Heating system	C883002	1,075.00 \$
High comfort heated seat	C883006	867.00 \$
Left protection bar for operator	C883020	605.00 \$
Plexiglass back window (smart cabin)	C883035	389.00 \$
Plexiglass right side (smart cabin)	C883034	389.00 \$
Plexiglass windscreen (smart cabin)	C883000	389.00 \$
Rear 12V electric socket	C883022	202.00 \$
Rear bull bar with side extensions for 8.4	C883036	470.00 \$
Rear hydraulic outlets - double	C883014	605.00 \$
Rear hydraulic outlets - single	C883013	806.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.


8 SERIES - FEATURES AND OPTIONS

Options	Code	Price
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Tractor tires 23x10.50-12 ET-25, set of 4	C884007	240.00 \$
Tractor tires 23x8.50-12, set of 4	C884005	149.00 \$
Trailer coupling	C885014	415.00 \$
Warning & Safety lights for road travel (with mirrors)	C883009	2,488.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Machine packages		Code	Price
8.4+	ALL SEASON: Cab with A/C, sound insulation linen and mirrors + Floating boom valve + Work light kit + Engine Block Heater	C963000/AS	61,759.00 \$
	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C963000/CL	59,778.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C963000/C	53,441.00 \$
8.4S	ALL SEASON: Cab with A/C, sound insulation linen and mirrors + Floating boom valve + Work light kit + Engine Block Heater	C963005/AS	64,879.00 \$
	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C963005/CL	62,898.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C963005/C	56,561.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

9.5

<http://tiny.cc/9seriesEN>

 ENGINE POWER 50 hp	 SPEED 15.5 mph	 FLOW RATE 22.5 GPM	 LIFT HEIGHT 126.4 in
---	--	--	--


Model	9.5 (50 HP - 2 speed)
Engine	Yanmar 4TNV88
Power (Iso Gross)	50 HP
Fuel	Diesel
Fuel tank capacity	50 l (13.2 gal)
Transmission	Hydrostatic
Drive speed (max.) - 2 speed	12-25 km/h (7,5-15.5 mph)
Aux. hydraulics oil flow	85 l/min (22.5 GPM)
Hydraulic oil tank capacity	59 l (15.6 gal)
Max. lifting height	3,21 m (126.4 in)
Tipping load, max ⁽¹⁾	2600 kg (5732 lbs)
Lifting capacity straight ⁽²⁾	2080 kg (4585 lbs)
Lifting capacity fully articulated ⁽³⁾	1600 kg (3527 lbs)
Breakout force / 50 cm	2200 kg (4850 lbs)
Pushing force (c)	1950 kgf (1950 kp)
Specific ground pressure (w/standard tires)	843 kg/m ² (172 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)
Weight	2025 kg (4464 lbs)
Product Code	C965000
Price	62,390.00 \$

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

9.5 FEATURES AND OPTIONS

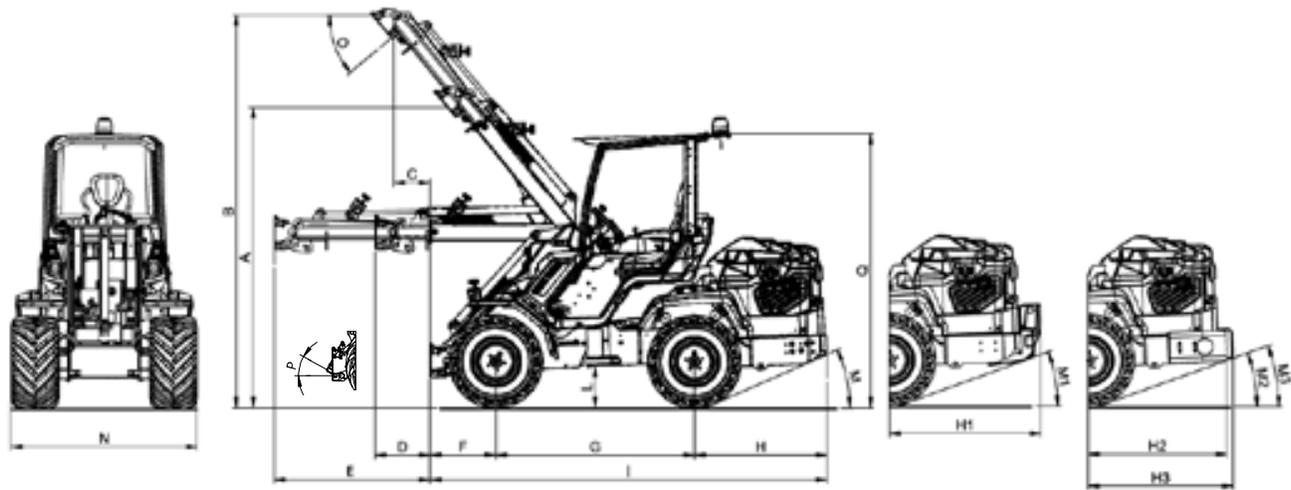

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2530 / 99.6	I - Machine length (without rear weights)	3200 / 126
B - Pivot point height (extended boom)	3210 / 126.4	L - Ground clearance	340 / 13.4
C - Outreach with lifted boom (extended boom)	460 / 18	M - Angle of departure (without rear weights)	24°
D - Outreach with horizontal boom (not extended)	460 / 18	M1 - Angle of departure (with 440 kg rear weights)	19°
E - Outreach with horizontal boom (extended)	1256 / 49.5	M2 - Angle of departure (with 180 kg rear weights - side)	21°
F - Front length	530 / 20.8	M3 - Angle of departure (with 180 kg rear weights - rear)	21°
G - Wheelbase	1600 / 63	N - Max width (with standard tires)	1500 / 59
H - Rear length (without rear weights)	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg rear weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg rear weights - side)	1115 / 43.9	Q - Height (with standard tires)	2150 / 84.6
H3 - Rear length (with 180 kg rear weights - rear)	1170 / 46	Q1 - Height with A/C (with standard tires)	2350 / 92.5

Features

- Yanmar 4TNV88 (50 HP), 4 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 2 pumps max. 22.5 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- Multi-disk parking brake, electric switch operated
- 11-functions joystick
- Self engaging parking brake
- Radial Piston Wheel Motor
- 2 Speed
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 31X15.50-15 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2150 mm (84.6 in)
27X10.50-15	1370 mm (54 in)	2100 mm (83 in)
27X8.50-15	1320 mm (52 in)	2100 mm (83 in)
26X12.00-12	1410 mm (55.5 in)	2090 mm (82.5 in)

9.5 FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883063	244.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets	C883026	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883008	1,318.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883032	1,346.00 \$
A/C system with heating for fully enclosed cab (C883001 required - not aftermarket)	C883900	3,056.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883011	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883001	5,919.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Turf tires 400/50-15, set of 4	C884013	470.00 \$
Heating system	C883002	1,075.00 \$
High comfort heated seat	C883006	867.00 \$
Left protection bar for operator	C883020	605.00 \$
Plexiglass back window (smart cabin)	C883035	389.00 \$
Plexiglass right side (smart cabin)	C883034	389.00 \$
Plexiglass windscreen (smart cabin)	C883000	389.00 \$
Rear 12V electric socket	C883023	215.00 \$
Rear bull bar with side extensions	C883037	619.00 \$
Rear hydraulic outlets - double	C883016	941.00 \$
Rear hydraulic outlets - single	C883015	806.00 \$
Rear weights (440 kg / 970 lbs)	C885025	2,254.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

9.5 FEATURES AND OPTIONS

Options	Code	Price
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4	C884009	538.00 \$
Trailer coupling	C885017	415.00 \$
Warning & Safety lights for road travel (with mirrors)	C883010	2,555.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Machine packages		Code	Price
9.5	ALL SEASON: Cab with A/C, sound insulation linen and mirrors + Floating boom valve + Work light kit + Engine Block Heater	C965000/AS	73,189.00 \$
	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C965000/CL	71,208.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C965000/C	64,871.00 \$

9.6

<http://tiny.cc/9seriesEN>
KOHLER
 ENGINES


 ENGINE POWER 57 hp	 SPEED 18.6 mph	 FLOW RATE 25 GPM	 LIFT HEIGHT 126.4 in
--	--	--	--


Model	9.6 (57 HP - 2 speed)
Engine	Kohler 1903 TCR
Power (Iso Gross)	57 HP
Fuel	Diesel
Fuel tank capacity	50 l (13.2 gal)
Transmission	Hydrostatic
Drive speed (max.) - 2 speed	15-30 km/h (9.3-18.6 mph)
Aux. hydraulics oil flow	95 l/min (25 GPM)
Hydraulic oil tank capacity	59 l (15.6 gal)
Max. lifting height	3,21 m (126.4 in)
Tipping load, max ⁽¹⁾	2600 kg (5732 lbs)
Lifting capacity straight ⁽²⁾	2080 kg (4585 lbs)
Lifting capacity fully articulated ⁽³⁾	1600 kg (3527 lbs)
Breakout force / 50 cm	2200 kg (4850 lbs)
Pushing force (c)	1950 kgf (1950 kp)
Specific ground pressure (w/standard tires)	858 kg/m ² (175 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)
Weight	2060 kg (4541 lbs)
Product Code	C965005
Price	66,456.00 \$

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

9.6 FEATURES AND OPTIONS

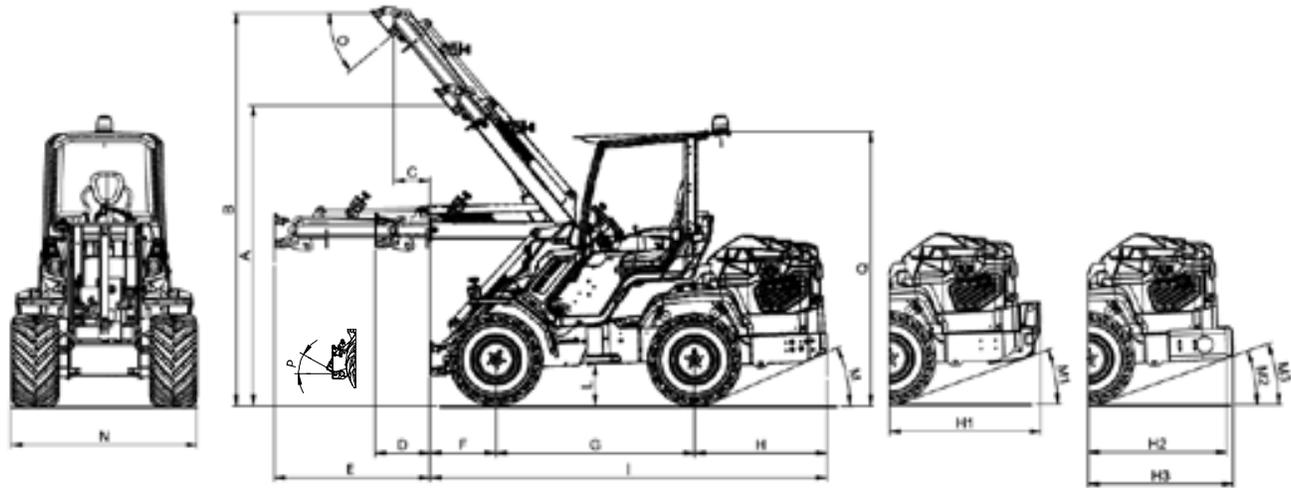

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2530 / 99.6	I - Machine length (without rear weights)	3200 / 126
B - Pivot point height (extended boom)	3210 / 126.4	L - Ground clearance	340 / 13.4
C - Outreach with lifted boom (extended boom)	460 / 18	M - Angle of departure (without rear weights)	24°
D - Outreach with horizontal boom (not extended)	460 / 18	M1 - Angle of departure (with 440 kg rear weights)	19°
E - Outreach with horizontal boom (extended)	1256 / 49.5	M2 - Angle of departure (with 180 kg rear weights - side)	21°
F - Front length	530 / 20.8	M3 - Angle of departure (with 180 kg rear weights - rear)	21°
G - Wheelbase	1600 / 63	N - Max width (with standard tires)	1500 / 59
H - Rear length (without rear weights)	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg rear weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg rear weights - side)	1115 / 43.9	Q - Height (with standard tires)	2150 / 84.6
H3 - Rear length (with 180 kg rear weights - rear)	1170 / 46	Q1 - Height with A/C (with standard tires)	2350 / 92.5

Features

- New Turbo Common Rail Kohler engine (TIER 4 Final) (57 HP), 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 2 pumps max. 25 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- Multi-disk parking brake, electric switch operated
- Torque divider
- 11-functions joystick
- Self engaging parking brake
- Radial Piston Wheel Motor
- 2 Speed
- Hydraulic oil cooler
- Engine power control
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 31X15.50-15 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2150 mm (84.6 in)
27X10.50-15	1370 mm (54 in)	2100 mm (83 in)
27X8.50-15	1320 mm (52 in)	2100 mm (83 in)
26X12.00-12	1410 mm (55.5 in)	2090 mm (82.5 in)

9.6 FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883063	244.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets	C883026	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883008	1,318.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883032	1,346.00 \$
A/C system with heating for fully enclosed cab (C883001 required - not aftermarket)	C883902	3,056.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883011	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883001	5,919.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Turf tires 400/50-15, set of 4	C884013	470.00 \$
Heating system	C883002	1,075.00 \$
High comfort heated seat	C883006	867.00 \$
Left protection bar for operator	C883020	605.00 \$
Plexiglass right side (smart cabin)	C883034	389.00 \$
Plexiglass back window (smart cabin)	C883035	389.00 \$
Plexiglass windscreen (smart cabin)	C883000	389.00 \$
Rear 12V electric socket	C883023	215.00 \$
Rear bull bar with side extensions	C883037	619.00 \$
Rear hydraulic outlets - double	C883016	941.00 \$
Rear hydraulic outlets - single	C883015	806.00 \$
Rear weights (440 kg / 970 lbs)	C885025	2,254.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

9.6 FEATURES AND OPTIONS

Options	Code	Price
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4	C884009	538.00 \$
Trailer coupling	C885017	415.00 \$
Warning & Safety lights for road travel (with mirrors)	C883010	2,555.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Machine packages		Code	Price
9.6	ALL SEASON: Cab with A/C, sound insulation linen and mirrors + Floating boom valve + Work light kit + Engine Block Heater	C965005/AS	77,255.00 \$
	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C965005/CL	75,274.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C965005/C	68,937.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

10.9

<http://tiny.cc/10seriesEN>COMPLIANT WITH
STAGE IIIB AND
TIER 4 FINAL
EMISSION STANDARDSENGINE POWER
75
hpSPEED
20
mphFLOW RATE
25
GPMLIFT HEIGHT
126.4
in**KOHLER**
ENGINES


Model	10.9 (75 HP - 2 speed)
Engine	Kolher 2504TCR
Power (Iso Gross)	75 HP
Fuel	Diesel
Fuel tank capacity	50 l (13.2 gal)
Transmission	Hydrostatic
Drive speed (max.) - 2 speed	16 - 32 km/h (10 - 20 mph)
Aux. hydraulics oil flow	95 l/min (25 GPM)
Hydraulic oil tank capacity	59 l (15.6 gal)
Max. lifting height	3,21 m (126.4 in)
Tipping load, max ⁽¹⁾	2700 kg (5952 lbs)
Lifting capacity straight ⁽²⁾	2160 kg (4762 lbs)
Lifting capacity fully articulated ⁽³⁾	1700 kg (3748 lbs)
Breakout force / 50 cm	2600 kg (5732 lbs)
Pushing force (c)	2650 kgf (2650 kp)
Specific ground pressure (w/standard tires)	874 kg/m ² (179 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)
Weight	2100 kg (4630 lbs)
Product Code	C966005
Price	72,280.00 \$

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load)

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

10.9 FEATURES AND OPTIONS

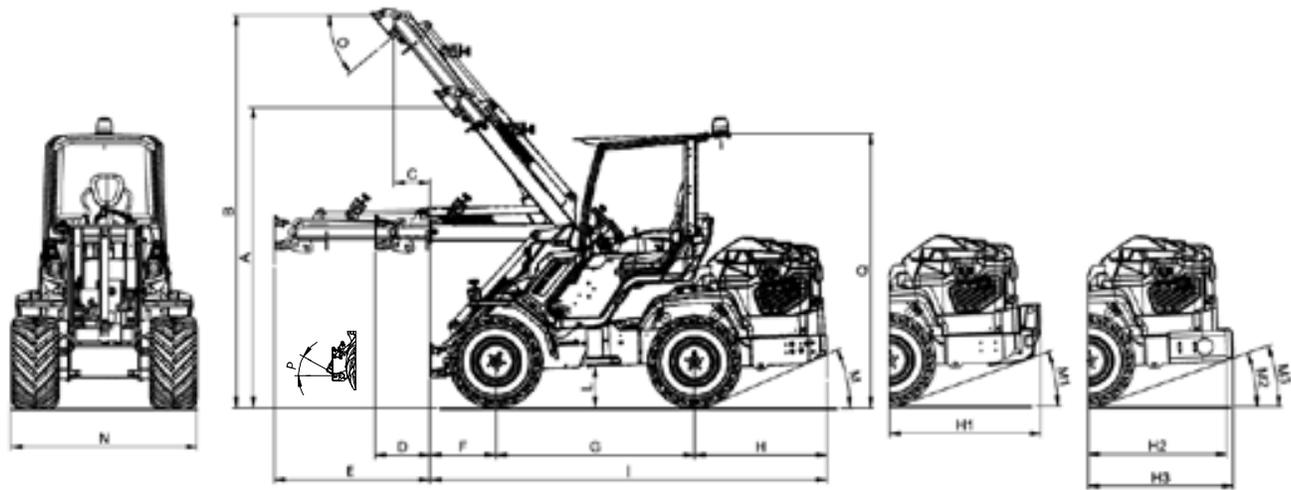

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2530 / 99.6	I - Machine length (without rear weights)	3200 / 126
B - Pivot point height (extended boom)	3210 / 126.4	L - Ground clearance	340 / 13.4
C - Outreach with lifted boom (extended boom)	460 / 18	M - Angle of departure (without rear weights)	24°
D - Outreach with horizontal boom (not extended)	460 / 18	M1 - Angle of departure (with 440 kg rear weights)	19°
E - Outreach with horizontal boom (extended)	1256 / 49.5	M2 - Angle of departure (with 180 kg rear weights - side)	21°
F - Front length	530 / 20.8	M3 - Angle of departure (with 180 kg rear weights - rear)	21°
G - Wheelbase	1600 / 63	N - Max width (with standard tires)	1500 / 59
H - Rear length (without rear weights)	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg rear weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg rear weights - side)	1115 / 43.9	Q - Height (with standard tires)	2150 / 84.6
H3 - Rear length (with 180 kg rear weights - rear)	1170 / 46	Q1 - Height with A/C (with standard tires)	2350 / 92.5

Features

- New Turbo Common Rail Kohler engine (TIER 4 Final) (75 HP), 4 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 2 pumps max. 25 GPM with Hi-Flow
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- Multi-disk parking brake, electric switch operated
- Torque divider
- 11-functions joystick
- Self engaging parking brake
- Radial Piston Wheel Motor
- 2 Speed
- Hydraulic oil cooler
- Engine power control
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable floating suspension seat with armrests and seat belt
- Backup warning beeper
- 31X15.50-15 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2150 mm (84.6 in)
27X10.50-15	1370 mm (54 in)	2100 mm (83 in)
27X8.50-15	1320 mm (52 in)	2100 mm (83 in)
26X12.00-12	1410 mm (55.5 in)	2090 mm (82.5 in)

10.9 FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883063	244.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working led light	C883018	794.00 \$
Additional front hydraulic outlets	C883026	1,278.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883008	1,318.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883032	1,346.00 \$
A/C system with heating for fully enclosed cab (C883001 required - not aftermarket)	C883902	3,056.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883011	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883001	5,919.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Turf tires 400/50-15, set of 4	C884013	470.00 \$
Heating system	C883002	1,075.00 \$
High comfort heated seat	C883006	867.00 \$
Left protection bar for operator	C883020	605.00 \$
Plexiglass back window (smart cabin)	C883035	389.00 \$
Plexiglass right side (smart cabin)	C883034	389.00 \$
Plexiglass windscreen (smart cabin)	C883000	389.00 \$
Rear 12V electric socket	C883023	215.00 \$
Rear bull bar with side extensions	C883037	619.00 \$
Rear hydraulic outlets - double	C883016	941.00 \$
Rear hydraulic outlets - single	C883015	806.00 \$
Rear weights (440 kg / 970 lbs)	C885025	2,254.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$


Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

10.9 FEATURES AND OPTIONS

Options	Code	Price
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4	C884009	538.00 \$
Trailer coupling	C885017	415.00 \$
Warning & Safety lights for road travel (with mirrors)	C883010	2,555.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Machine packages		Code	Price
10.9	ALL SEASON: Cab with A/C, sound insulation linen and mirrors + Floating boom valve + Work light kit + Engine Block Heater	C966005/AS	83,079.00 \$
	CAB&LIGHTS: Fully enclosed cab with sound insulation linen and mirrors + Heating system + Floating boom valve + Work light kit + Engine Block Heater	C966005/CL	81,098.00 \$
	COMFORT: High comfort heated seat + 3 additional working led lights + Floating boom valve	C966005/C	74,761.00 \$

SD SERIES

<http://tiny.cc/7SDseriesEN>


ENGINE POWER
40*
hp



SPEED
10.5*
mph



FLOW RATE
9.8*
GPM



LIFT HEIGHT
114
in

(*) 8.4SD

Model	6.3 SD (28 HP - 8.7 mph)	7.3 SD (35 HP - 9.3 mph)	8.4 SD (35 HP - 10.5 mph)
Engine	Yanmar 3TNV76	Yanmar 3TNV82	Yanmar 3TNV88
Power (Iso Gross)	28 HP	35 HP	40 HP
Fuel	Diesel		
Fuel tank capacity	34 l (9 gal)		
Transmission	Hydrostatic		
Drive speed (max.)	14 km/h (8.7 mph)	15 km/h (9.3 mph)	17 km/h (10.5 mph)
Aux. hydraulics oil flow	31 l/min (8.2 GPM)	37 l/min (9.8 GPM)	37 l/min (9.8 GPM)
Hydraulic oil tank capacity	42 l (11.1 gal)		
Max. lifting height	2,90 m (114 in)		
Tipping load, max (1)	1500 kg (3307 lbs)	1580 kg (3483 lbs)	1610 kg (3549 lbs)
Lifting capacity straight (2)	1200 kg (2645 lbs)	1260 kg (2778 lbs)	1290 kg (2844 lbs)
Lifting capacity fully articulated (3)	900 kg (1984 lbs)	1100 kg (2425 lbs)	1230 kg (2712 lbs)
Breakout force / 50 cm	1400 kg (3086 lbs)	1700 kg (3748 lbs)	1700 kg (3748 lbs)
Pushing force (c)	1000 kgf (1000 kp)	1200 kgf (1200 kp)	1200 kgf (1200 kp)
Specific ground pressure (w/standard tires)	1113 kg/m ² (228 lbs/sqft)	1175 kg/m ² (240 lbs/sqft)	1230 kg/m ² (252 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)		
Standard tires (Tractor profile)	23X8.50-12	23X10.50-12	26X12.00-12
Weight	1610 kg (3549 lbs)	1700 kg (3748 lbs)	1780 kg (3924 lbs)
Product Code	C967000	C967100	C967200
Price	39,520.00 \$	46,800.00 \$	49,400.00 \$


(1) Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

(2) Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

(3) Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SD SERIES FEATURES AND OPTIONS

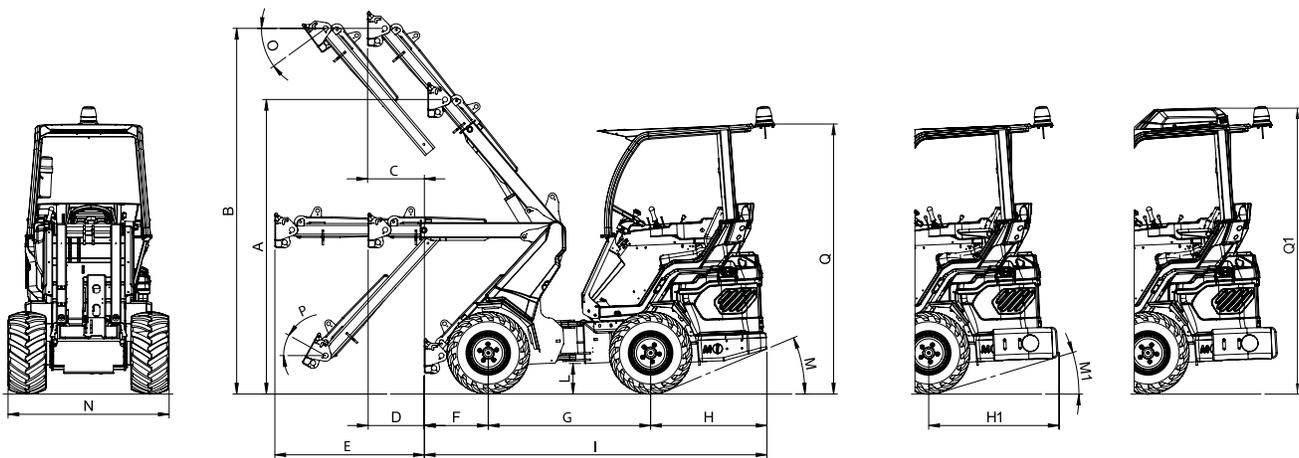

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2290 / 90	M - Angle of departure (without rear weights)	21°
B - Pivot point height (extended boom)	2900 / 114	M1 - Angle of departure (with rear weights)	15°
C - Outreach with lifted boom (extended boom)	455 / 17.9	N - Max width (with standard tires) 6.3SD	1070 / 42.1
D - Outreach with horizontal boom (not extended)	445 / 17.5	N - Max width (with standard tires) 7.3SD	1130 / 44.5
E - Outreach with horizontal boom (extended)	1185 / 46.6	N - Max width (with standard tires) 8.4SD	1300 / 51.2
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8	Q - Height (with standard tires) 6.3SD e 7.3SD	2100 / 82.7
H1 - Rear length (with rear weights)	1010 / 37.9	Q - Height (with standard tires) 8.4SD	2140 / 84.2
I - Machine length	2690 / 105.9	Q1 - Height (with standard tires and AC) 8.4SD	2340 / 92.1
L - Ground clearance	210 / 8.3		

Features

- Yanmar, 3 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 1 pumps max. 9.8 GPM (8.4SD)
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- 4-functions joystick (9-functions optional)
- Mechanical parking brake
- Radial Piston Wheel Motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable spring seat with armrests and seat belt
- Ready to fit cabin
- Backup warning beeper
- 6.3SD: 23x8.50-12 wheels, tractor or turf profile
- 7.3SD: 23x10.50-12 wheels, tractor or turf profile
- 8.4SD: 26x12.00-12 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
26X12.00-12	1300 mm (51.2 in)	2140 mm (84.2 in)
27X10.50-15	1150 mm (45.3 in)	2180 mm (85.8 in)
23X10.50-12	1130 mm (44.5 in)	2100 mm (82.7 in)
27X8.50-15	1070 mm (42.1 in)	2180 mm (85.8 in)
23X8.50-12	1070 mm (42.1 in)	2100 mm (82.7 in)

SD SERIES - FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883062	173.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working LED light	C883018	794.00 \$
9 - function joystick	C883041	1,505.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883051	1,317.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883058	808.00 \$
A/C system with heating for fully enclosed cab (only 8.4 SD) (C883044 required - not aftermarket)	C883804	3,056.00 \$
Drive motors power kit 6.3 SD (torque +25%, speed -20%)	C883603	406.00 \$
Drive motors power kit 7.3 SD and 8.4 SD (torque +25%, speed -20%)	C883040	401.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883060	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883044	5,919.00 \$
Turf tires 23x10.50-12 ET-25, set of 4	C884008	215.00 \$
Turf tires 23x8.50-12, set of 4	C884006	149.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Heating system	C883033	1,074.00 \$
Heated seat	C885216	208.00 \$
Left protection bar for operator	C883052	605.00 \$
Plexiglass back window (smart cabin)	C883057	389.00 \$
Plexiglass right side (smart cabin)	C883056	389.00 \$
Plexiglass windscreen (smart cabin)	C883046	389.00 \$
Rear 12V electric socket	C883050	202.00 \$
Rear bull bar with side extensions	C883036	470.00 \$
Rear hydraulic outlets - double	C883048	941.00 \$
Rear hydraulic outlets - single	C883049	808.00 \$


Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SD SERIES - FEATURES AND OPTIONS

Options	Code	Price
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Torque divider	C883004	1,278.00 \$
Tractor tires 23x10.50-12 ET-25, set of 4 (only 6.3SD and 8.4SD)	C884007	240.00 \$
Tractor tires 23x8.50-12, set of 4 (only 7.3SD and 8.4 SD)	C884005	149.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4 (only 6.3SD and 7.3SD)	C884009	538.00 \$
Trailer coupling	C885014	415.00 \$
Warning & Safety lights for road travel with mirrors	C883045	2,488.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

9.5 SD

<http://tiny.cc/9SDseriesEN>


 ENGINE POWER	 SPEED	 FLOW RATE	 LIFT HEIGHT
50 hp	11.2 mph	13.5 GPM	126.4 in


Model	9.5 SD (50 HP - 11.2 mph)
Engine	Yanmar 4TNV88
Power (Iso Gross)	50 HP
Fuel	Diesel
Fuel tank capacity	50 l (13.2 gal)
Transmission	Hydrostatic
Drive speed (max.)	18 km/h (11.2 mph)
Aux. hydraulics oil flow	51 l/min (13.5 GPM)
Hydraulic oil tank capacity	59 l (15.6 gal)
Max. lifting height	3,21 m (126.4 in)
Tipping load, max ⁽¹⁾	2650 kg (5842 lbs)
Lifting capacity straight ⁽²⁾	2120 kg (4674 lbs)
Lifting capacity fully articulated ⁽³⁾	1650 kg (3638 lbs)
Breakout force / 50 cm	2200 kg (4850 lbs)
Pushing force (c)	1550 kgf (1550 kp)
Specific ground pressure (w/standard tires)	856 kg/m ² (175 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)
Weight	2055 kg (4530 lbs)
Product Code	C967300
Price	59,280.00 \$

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with rear weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with rear weights and boom not extended. Weight of attachment is included.

9.5 SD FEATURES AND OPTIONS

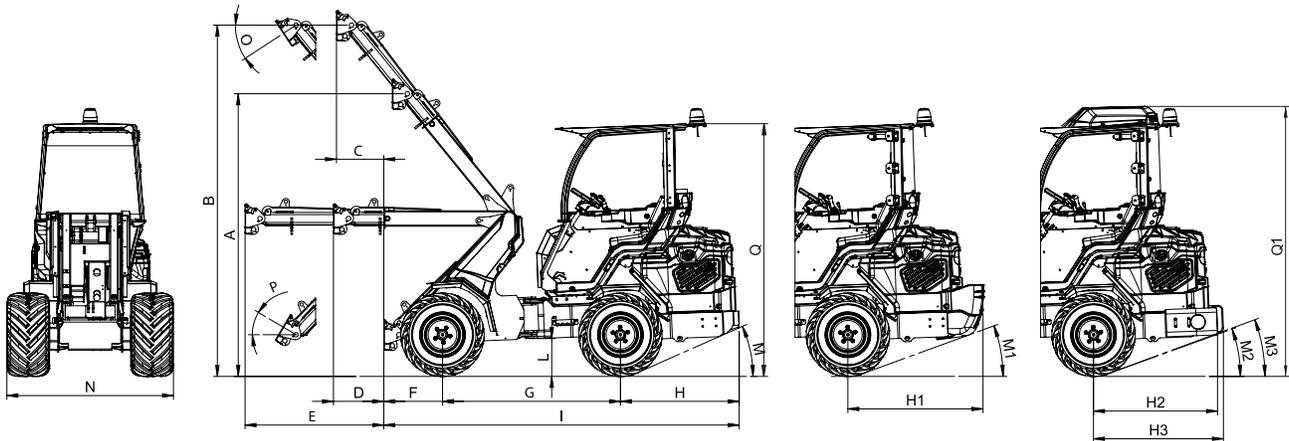

DIMENSIONS (mm / in)

A - Pivot point height (not extended boom)	2530 / 99.6	I - Machine length (without rear weights)	3200 / 126
B - Pivot point height (extended boom)	3210 / 126.4	L - Ground clearance	340 / 13.4
C - Outreach with lifted boom (extended boom)	460 / 18	M - Angle of departure (without rear weights)	24°
D - Outreach with horizontal boom (not extended)	460 / 18	M1 - Angle of departure (with 440 kg rear weights)	19°
E - Outreach with horizontal boom (extended)	1256 / 49.5	M2 - Angle of departure (with 180 kg rear weights - side)	19°
F - Front length	530 / 20.8	M3 - Angle of departure (with 180 kg rear weights - rear)	19°
G - Wheelbase	1600 / 63	N - Max width (with standard tires)	1500 / 59
H - Rear length (without rear weights)	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg rear weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg rear weights - side)	1115 / 43.9	Q - Height (with standard tires)	2260 / 89
H3 - Rear length (with 180 kg rear weights - rear)	1170 / 46	Q1 - Height with A/C (with standard tires)	2460 / 97

Features

- Yanmar 4TNV88 (50 HP), 4 cyl. diesel engine, water cooled, electric start, glow plug
- Hydraulically pilot operated variable displacement drive pump
- Aux. hydraulics: 1 pumps max. 13.5 GPM
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- 9-functions joystick
- Multi-disk parking brake, electric switch operated
- Radial Piston Wheel Motor
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable spring seat with armrests and seat belt
- Ready to fit cabin
- Backup warning beeper
- 31X15.50-15 wheels, tractor or turf profile

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2260 mm (89 in)
27X10.50-15	1370 mm (54 in)	2210 mm (87 in)
27X8.50-15	1320 mm (52 in)	2210 mm (87 in)
26X12.00-12	1410 mm (55.5 in)	2190 mm (86.5 in)

9.5 SD FEATURES AND OPTIONS

Options	Code	Price
110 V engine block heater	C885255	210.00 \$
2 inch receiver hitch	C883063	244.00 \$
3 additional working halogen light	C883064	458.00 \$
3 additional working LED light	C883018	794.00 \$
Additional front hydraulic outlets	C883913	1,279.00 \$
Attachment coupling plate for rear mounting	C880031	297.00 \$
Automatic locking plate	C883051	1,317.00 \$
Beacon light	C883039	321.00 \$
Biodegradable oil	C883032	1,346.00 \$
A/C system with heating for fully enclosed cab (C883044 required - not aftermarket)	C883907	3,056.00 \$
Driver area cover	C880049	122.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Floating boom valve	C883060	820.00 \$
Fully enclosed cab with sound insulation linen and mirrors	C883044	5,919.00 \$
Turf tires 26x12.00-12 ET-50, set of 4	C884010	512.00 \$
Turf tires 400/50-15, set of 4	C884013	470.00 \$
Heating system	C883033	1,074.00 \$
Heated seat	C885216	208.00 \$
Left protection bar for operator	C883052	605.00 \$
Plexiglass back window (smart cabin)	C883057	389.00 \$
Plexiglass right side (smart cabin)	C883056	389.00 \$
Plexiglass windscreen (smart cabin)	C883046	389.00 \$
Rear 12V electric socket	C883050	202.00 \$
Rear bull bar with side extensions	C883037	619.00 \$
Rear hydraulic outlets - double	C883908	941.00 \$
Rear hydraulic outlets - single	C883049	808.00 \$
Rear weights (440 kg / 970 lbs)	C885025	2,254.00 \$
Rear weights 180 kg (90+90 kg) (198 + 198 lbs)	C880054	1,047.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

9.5 SD FEATURES AND OPTIONS


Options	Code	Price
Skid tires 27x8.50-15, set of 4	C884011	349.00 \$
Snow chains for wheel	see page 58	/
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Torque divider	C883910	1,586.00 \$
Tractor tires 26x12.00-12 ET-50, set of 4	C884009	538.00 \$
Trailer coupling	C885017	415.00 \$
Warning & Safety lights for road travel with mirrors	C883045	2,488.00 \$
Wheel spacer 10 mm (0.4 in) (set of 4 - max. 1 pcs for wheel)	C880090	86.00 \$
Wheel spacer 55 mm (2.2 in), set of 4	C885010	568.00 \$

12 SERIES

<http://tiny.cc/12seriesEN>

 ENGINE POWER 40 hp	 SPEED 12.4* mph	 FLOW RATE 13.7 GPM	 LIFT HEIGHT 136* in
--	---	--	---

(*) 12.4T 2V


**NEW**

Model	12.4 (40 HP - 8 mph)	12.4 2V (2 speed)	12.4 T (40 HP - 8 mph)	12.4 T 2V (2 speed)
Engine	Yanmar 3TNV88			
Power (Iso Gross)	40 HP			
Fuel	Diesel			
Fuel tank capacity	56 l (14.8 gal)			
Transmission	Hydrostatic			
Drive speed (max.)	13 km/h (8 mph)	Double speed: 10 - 20 km/h (6.2 - 12.4 mph)	13 km/h (8 mph)	Double speed: 10 - 20 km/h (6.2 - 12.4 mph)
Boom	Standard	Standard	Telescopic	Telescopic
Aux. hydraulics oil flow	52 l/min (13.7 GPM)			
Hydraulic oil tank capacity	44 l (11.6 gal)			
Max. lifting height	2,4 m (94.5 in)		3,45 m (135.8 in)	
Tipping load, max (1)	2009 kg (4430 lbs)		1349 kg (2974 lbs)	
Lifting capacity (2)	1439 kg (3172 lbs)		1259 kg (2775 lbs)	
Breakout force / 50 cm w/bucket	1750 kg (3858 lbs)		1840 kg (4056 lbs)	
Pushing force (c)	1900 kgf (1900 kp)			
Specific ground pressure (w/std tires)	1121 kg/m ² (230 lbs/sqft)		1186 kg/m ² (243 lbs/sqft)	
Turning radius: inside/outside	1200 / 2437 mm (47.2/95.9 in)			
Standard tires (Skid profile)	27x8.50-15			
Weight	2075 kg (4575 lbs)		2195 kg (4839 lbs)	
Product Code	C985400	C985410	C985420	C985430
Price	55,000.00 \$	59,000.00 \$	58,000.00 \$	60,000.00 \$

(1) Maximum load that can be lifted just off the ground when the machine is straight, with rear weights and boom not extended. Weight of attachment included.

(2) Machine straight with rear weights and boom not extended. Weight of attachment is included.

12 SERIES FEATURES AND OPTIONS

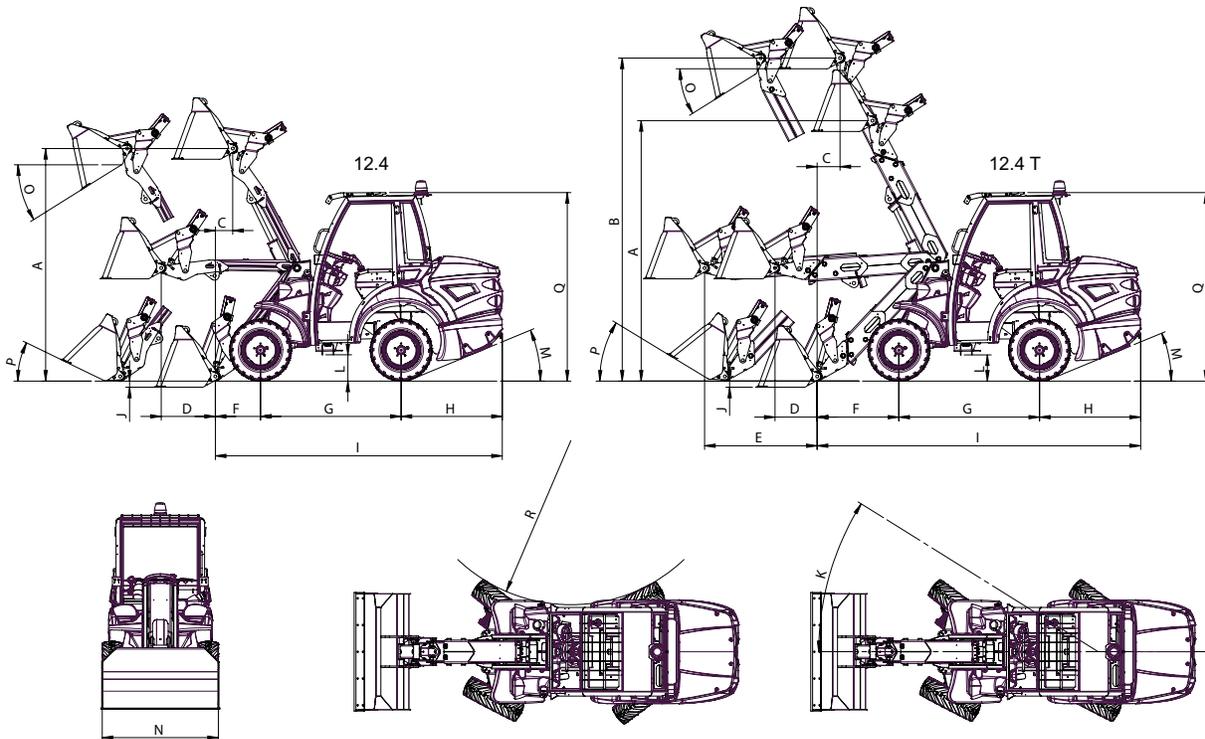

DIMENSIONS (mm / in)

	12.4	12.4 T		12.4	12.4 T
A - Pivot point height (not ext. boom)	2375 / 93.5	2800 / 110.2	K - Steering Angle	32°	
B - Pivot point height (ext. boom)	/	3450 / 135.8	I - Machine length	3015 / 118.7	3460 / 136.2
C - Outreach (lifted boom)	178 / 7	244 / 9.6	L - Ground clearance	280 / 11	
D - Outreach (horizontal boom)	450 / 17.7	450 / 17.7	M - Angle of departure	22°	
E - Outreach (ext. horizontal boom)	/	1200 / 47.2	N - Max width (std tires)	1237 / 48.7	
F - Front length	416 / 16.4	870 / 34.2	O - Dump angle	32°	
G - Wheelbase	1490 / 58.7		P - Rollback angle	26°	
H - Rear length	1100 / 43.3		Q - Height (std tires)	2000 / 78.7	
J - Digging Depth	160 / 6.3	65 / 2.6	R - Inside turning radius	1200 / 47.2	

Features

- 4WD hydrostatic Direct Drive motors, proportional servo control
- Self-levelling boom
- Dual steering system: all-wheel and crab
- 11-functions joystick
- Multi-disk parking brake
- Radial Piston high efficiency and heavy duty wheel motors
- Hi-Flow system (optional)
- Hydraulic multiconnector
- 2 Speed (only 2V model)
- Hydraulic oil cooler
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- Ergonomic full adjustable suspension seat with armrest and seat belt
- 2 front working light
- Ready to fit cabin
- Backup warning beeper

Tires size	Width (N)	Height (Q)
27X10.50-15	1287 mm (50.7 in)	2000 mm (78.7 in)
10-16.5	1280 mm (50.4 in)	2070 mm (81.5 in)
400/50-15 (31x15.50-15)	1580 mm (62.2 in)	2055 mm (80.9 in)

12 SERIES FEATURES AND OPTIONS

Options	Code	Price
4 wheel spacer 10 mm (0.4 in) (max. 1 pcs for wheel)	C880090	86.00 \$
Multiconnector to single line quick coupling, 3 lines	C880221	450.00 \$
Warning & Safety lights for road travel (with mirrors)	C882001	2,617.00 \$
Trailer Coupling	C882002	840.00 \$
Hi-Flow kit for Standard Boom (only for C985400 and C985410)	C882003	5,100.00 \$
Rear hydraulic outlet	C882004	1,108.00 \$
Fully enclosed cab with heating system and mirrors	C882006	5,253.00 \$
Hi-Flow kit for Telescopic Boom (only for C985420 and C985430)	C882007	5,100.00 \$
Heating system	C882008	1,089.00 \$
Rear inner weights 100 kg/220 lbs	C882009	800.00 \$
Biodegradable oil	C883007	605.00 \$
Beacon light	C883039	321.00 \$
Tie down bracket on wheel hub, set of 4	C883065	153.00 \$
Skid tires 10-16.5, set of 4	C883106	1,050.00 \$
Skid tires 27x10.50-15, set of 4	C884012	402.00 \$
Turf tires 400/50-15 (31x15.50-15), set of 4	C884014	2,674.00 \$
Tractor tires 400/50-15 (31x15.50-15), set of 4	C884015	2,674.00 \$
Heated seat	C885015	630.00 \$
110 V engine block heater	C885255	210.00 \$
Adapter plate to connect mini loader MultiOne attachments	C890025	430.00 \$
Snow chains for wheel	see page 58	/



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

WHEELS AND TIRES



TRACTOR



TRACTOR HD



SKID



TURF

Code			Size	Profile	Compatibility											
Wheel complete	Rim	Tire			2 Series	4 Series	5.2	5.3	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series
C040060	C040181	C040116	20X8.00-10	Tractor	S											
C040061	C040181	C040115	20X8.00-10	Turf	C											
C040049	C040182	C040130	23X8.50-12	Turf	C	C	C	C	C	C	C			C		
C040050	C040182	C040131-2	23X8.50-12	Tractor	C	S	S	C	S	C	C			S ⁶		
C040075	C040183	C040134	23X10.50-12 ET-25	Tractor		C	C	S	C	S	C			S ⁷		
C040076	C040183	C040133	23X10.50-12 ET-25	Turf		C	C	C	C	C	C			C		
C040058	C040184	C040138	26X12.00-12 ET-0 (320/60-12)	Skid								C	C		C	
C040052	C040184	C040136 ⁽¹⁾ C040137 ⁽²⁾	26X12.00-12 ET-0 (320/60-12)	Tractor HD Tractor								C	C		C	
C040053	C040184	C040135	26X12.00-12 ET-0 (320/60-12)	Turf								C	C		C	
C040056	C040185	C040136 ⁽¹⁾ C040137 ⁽²⁾	26X12.00-12 ET-50 (320/60-12)	Tractor HD Tractor		C	C	C	C	C	S	C	C	S ⁸	C	
C040057	C040185	C040135	26X12.00-12 ET-50 (320/60-12)	Turf		C	C	C	C	C	C	C	C	C	C	
C040070	C040190	C040153	27X8.50-15	Skid		C	C	C	C	C	C	C	C	C	C	S
C040072	C040190	C040154	27X10.50-15	Skid					C	C	C	C	C	C	C	C
C040085	C040187	C040155	400/50-15	Turf								C	C		C	
C040002	C040187	C040151-2	31X15.50-15 (400/50-15)	Tractor								S	S		S	
C040036	C040188	C040151-2	400/50-15 ET-100	Tractor												C
C040087	C040188	C040155	400/50-15 ET-100	Turf												C
C040088	/	/	10-16.5	Skid												C

(¹) Starco - (²) Trelleborg S = standard ; C = compatible

WHEELS AND TIRES

Wheels complete (rim+tire)	Code	Price
20X8.00-10 Tractor	C040060	346.00 \$
20X8.00-10 Turf	C040061	340.00 \$
23X8.50-12 Turf	C040049	472.00 \$
23X8.50-12 Tractor	C040050	406.00 \$
23X10.50-12 ET-25 Tractor	C040075	471.00 \$
23X10.50-12 ET-25 Turf	C040076	434.00 \$
26X12.00-12 ET-0 (320/60-12) Skid	C040058	686.00 \$
26X12.00-12 ET-0 (320/60-12) Tractor HD / Tractor	C040052	619.00 \$
26X12.00-12 ET-0 (320/60-12) Turf	C040053	587.00 \$
26X12.00-12 ET-50 (320/60-12) Tractor HD / Tractor	C040056	629.00 \$
26X12.00-12 ET-50 (320/60-12) Turf	C040057	566.00 \$
27X8.50-15 Skid	C040070	592.00 \$
27X10.50-15 Skid	C040072	535.00 \$
400/50-15 Turf	C040085	921.00 \$
31X15.50-15 (400/50-15) Tractor	C040002	917.00 \$
400/50-15 ET-100 Tractor	C040036	1,100.00 \$
400/50-15 ET-100 Turf	C040087	886.00 \$
10-16.5 Skid	C040088	812.00 \$
Rims	Code	Price
6.00 - 10" ET-0, 5 holes	C040181	167.00 \$
7.00 - 12" ET-0, 5 holes	C040182	260.00 \$
8.50 - 12" ET-25, 5 holes	C040183	227.00 \$
10.50 - 12" ET-0, 5 holes	C040184	297.00 \$
10.50 - 12" ET-50, 5 holes	C040185	252.00 \$
7.00 - 15" ET-0, 5 holes	C040190	205.00 \$
13.00 - 15" ET-0, 5 holes	C040187	331.00 \$
13.00 - 15" ET-100 5 holes	C040188	439.00 \$
Tires	Code	Price
20X8.00-10 Tractor	C040116	214.00 \$
20X8.00-10 Turf	C040115	218.00 \$
23X8.50-12 Turf	C040130	252.00 \$
23X8.50-12 Tractor - Starco	C040131	318.00 \$
23X8.50-12 Tractor - Trellerborg	C040132	231.00 \$
23X10.50-12 Tractor	C040134	378.00 \$
23X10.50-12 Turf	C040133	318.00 \$
26X12.00-12 Skid	C040138	346.00 \$
26X12.00-12 Tractor HD / Tractor - Starco	C040136	409.00 \$
26X12.00-12 Tractor HD / Tractor - Trellerborg	C040137	NA
26X12.00-12 Turf	C040135	346.00 \$
27X8.50-15 Skid	C040153	236.00 \$
27X10.50-15 Skid	C040154	283.00 \$
400/50-15 Turf	C040155	645.00 \$
31X15.50-15 (400/50-15) Tractor	C040151	576.00 \$
31X15.50-15 (400/50-15) Tractor	C040152	550.00 \$

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



TELESCOPIC BOOM

Telescopic boom with double H frame for extra strength. It allows reaching considerable load heights, ensuring an excellent visibility of the load at any time.


2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12.4	12.4 T



SELF-LEVELLING

This is an ideal device for lifting heavy loads safely. It is installed on the machine boom and keeps the load level, without the need to continuously correct the position with the joystick.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

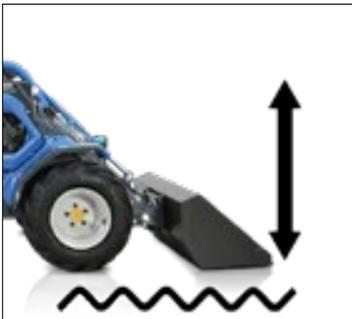

BOOM FLOATING SYSTEM

It allows the mounted attachments to follow the contours of the land perfectly. Ideal for applications in agriculture and in the care of the green areas.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



FULLY ENCLOSED CABIN

This is the best insulation system for the driver to protect him from cold, wind, rain, and snow. Easy access thanks to the large door and the compass glass opening.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



“SMART” CABIN

The most competitive solution for the operator who wants to improve working conditions thanks to a light cabin which limits the discomfort created by weathering.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



HEATING

Three-way heating with adjustable air flows and temperature.


2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



HEATED SEAT

Ideal for cold climates, it significantly increases the comfort of the machine.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

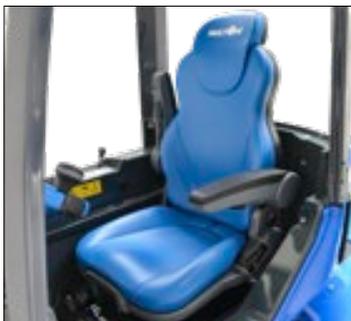

HIGH COMFORT HEATED SEAT

Ergonomic heated seat with fully adjustable suspension, headrest, armrests, seat belt and documents compartment (On EZ series the seat isn't heated).

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



AIR CONDITIONING FOR CABIN

Air conditioning system from the roof of the cabin, with adjustable fan speed and electronic temperature control. Wide air outlets create a very comfortable ventilation system inside the cabin.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7 SD	8 SD	9.5 SD	12 Series



FOPS - ROPS

This structure is tested and certified in accordance with ISO 3449 and protects the operator against falling objects.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



SAFETY PROTECTION BAR

A side-protection bar that has been certified and awarded as a technical safety innovating system. It is placed on the left side of the machine to protect the operator from falling out of the vehicle. It can be locked and unlocked very quickly thanks to a special mechanism.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



WARNING & SAFETY LIGHTS FOR ROAD TRAVEL

Front and rear lights, direction indicators, turning light, beacon, mirrors.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



TRAILER COUPLING

Rear tow hook with double connection: with tow ball (car type) or tow pin (agricultural type).

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



REAR WEIGHTS (485 LBS + 485 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



REAR WEIGHTS (198 LBS + 198 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



REAR WEIGHTS (92 LBS + 92 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



DYNAMIC BLOCK SYSTEM

The DBS diverts oil flow between the left & right side hydraulic wheel motors: the hydraulic oil flows in parallel between the hydraulic wheel motors on each side operating similar to a differential lock.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



TORQUE DIVIDER

It evenly distributes hydraulic oil between the front right and front left side hydraulic motors, improving traction on slippery and uneven surfaces.

2 Series	4 Series	5 Series	6 Series	7.2	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



HYDRAULIC MULTICONNECTOR

It is a innovative coupling system for front attachments that allow the connection of the hydraulic lines in a few seconds without stress.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



MULTICONNECTOR TO SINGLE LINE QUICK COUPLING, 3 LINES

Adaptor for machines, in order to connect standard flat face single lines connections. Suggested for attachments equipped only with hydraulic cylinders, not with hydraulic motors. The adaptor has 3 lines to fulfill the connections with any kind of attachments.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



REAR HYDRAULIC OUTLETS

They are used to mount on the rear side attachments that need hydraulic supply. The rear outlets are controlled by the control panel.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



AUTOMATIC LOCKING/UNLOCKING PLATE

On the automatic attachment plate the locking pins move hydraulically and are operated from cockpit. This way the driver can stay on the seat when coupling and disconnecting non-hydraulic attachments.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



REAR COUPLING PLATE

It is used to assemble attachments on the rear of the machine.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



ENGINE BLOCK HEATER

It is an ideal device for cold temperatures. The system keeps the engine at an optimal temperature for easy starting with very cold climates. 220V or 110V available.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



12V REAR ELECTRIC SOCKET

12 Volt rear electric socket to connect the attachments.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



WHEEL SPACER KIT

Wheel spacers are used to make the machine wider and increase its stability.


2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



DRIVER AREA COVER

Covers the machine interior, protects against rain, snow, etc.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

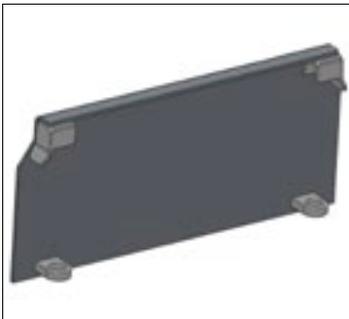


ATTACHMENT COUPLING PLATE

Plate to be welded on the customer's attachment to make it suitable for MultiOne mini loader. To be checked (at customer charge): - applicable laws and safety requirements. - machine and circuits interface.

CODE: C880233 (6 mm) PRICE: 196.00 \$

CODE: C880236 (12 mm) PRICE: 241.00 \$

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

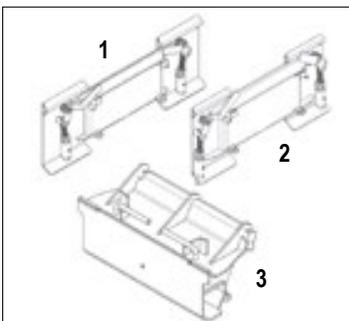

SKID-STEER ATTACHMENT ADAPTER PLATE

Coupling adapter suitable to mount skid steer attachments on MultiOne mini loader.

1 - CODE: C890020 - Full size skid steer attachment adapter plate - PRICE: 740.00 \$

2 - CODE: C890023 - MT skid steer attachment adapter plate - PRICE: 740.00 \$

3 - CODE: C880230 - Mini skid steer attachment adapter plate - PRICE: 740.00 \$

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



TILT ADAPTER

Tilt adapter is mounted between the attachment and the loader's attachment coupling plate and it allows to tilt the attachment sideways. Max. 14.5 degree tilting in both directions.

CODE: C890190 - Tilt adapter - PRICE: 1,717.00 \$

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



BEACON LIGHT

Orange beacon light mounted on the top of the cab's roof.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



MULTI-FUNCTIONS JOYSTICK

The multi-function electronic joystick allows an easy and precise control of the boom and attachments.

2 Series	4 Series	5.2	5.3	6 Series	7.2	7.3+-7.3S	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



HI FLOW

It's a additional pump that increases the outlets oil flow.


2 Series	4 Series	5.2	5.3	6 Series	7.2	7.3+-7.3S	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



BIODEGRADABLE OIL

A eco-friendly choice.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

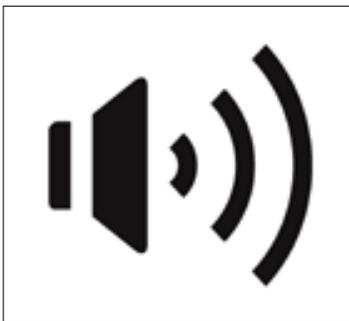

BACKUP WARNING BEEPER

It help keep everyone safer during MultiOne machine operation.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



DRIVE MOTORS POWER KIT

The Power kit increases torque (+25%), and decreases speed (-20%) of the standard drive motors.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



REAR BULL BAR WITH SIDE EXTENSIONS

It protects the rear side of the machine in case of shocks.

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



TIE DOWN BRACKET ON WHEEL HUB

The tie down brackets mounted on wheel hub makes easier to tie down the machine on a trailer.


2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series



REAR MOUNT FOR SNOWEX SALT SPREADER

It allows to mount the SnowEX salt spreaders on the machine rear.
Compatible with the models: Drop Pro, Drop Pro 600 and Precision Pro.
The rear coupling plate is required.
CODE: C235325

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

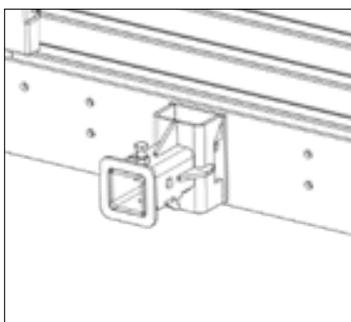

2 INCH RECEIVER HITCH

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



SNOW CHAINS

MultiOne snow chains improve traction on snow or ice. (Set of 2).

Tires	Code	Price	Tires	Code	Price
20x8.00-10	C880040	395.00 \$	31x15.50-15 (400/50-15)	C880044	673.00 \$
23x8.50-12	C880041	712.00 \$	27x8,50-15	C880045	470.00 \$
26x12.00-12	C880042	540.00 \$	23x10,50-12	C880046	431.00 \$

2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD	12 Series

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.



MULTI¹ONE

WWW.MULTIONE.US

MultiOne America
3031 E. Cherry Street
Springfield, MO 65802
Ph: +1 417 351 3585
info@multione.us

The information and images herein contained are provided for illustrative purposes only and are not binding on MultiOne that reserves the right to change them at any time without notice. ©2018 MultiOne America. All rights reserved.

MULTI 1 ONE

ATTACHMENTS - R.184 - USA

RETAIL PRICE LIST

VALID FROM DECEMBER 5, 2018



BUCKETS, MATERIAL HANDLING	2	WEED BRUSH.....	43
BIG BAG LIFTER.....	13	GROUND CARE.....	55
COMBO BUCKET.....	8	CORE AERATOR.....	63
DEMOLITION GRAPPLE BUCKET.....	7	FLAIL MOWER.....	56
GENERAL BUCKET.....	2	FLAIL MOWER WITH SIDE SHIFT.....	55
GRAPPLE BUCKET.....	6	HEDGE CUTTER.....	64
HEAVY DUTY GENERAL BUCKET.....	3	LANDSCAPE POT CLAMP.....	66
HEAVY DUTY LIGHT MATERIAL BUCKET.....	5	LAWN MOWER.....	59
HIGH TIP BUCKET.....	9	SICKLE BAR MOWER.....	61
JIB CRANE, ONE-PIECE OR TELESCOPIC.....	12	SIDE BOOM WITH FLAIL MOWER DZ1.....	57
LIFTING TROLLEY.....	15	SIDE BOOM WITH FLAIL MOWER DZ2.....	58
LIGHT MATERIAL BUCKET.....	4	SPIKE AERATOR.....	62
PALLET FORK.....	10	SPRAYER.....	65
PALLET FORK HYDRAULIC CLAMP.....	11	TORNADO LAWN MOWER.....	60
PALLET FORK WITH SIDE SHIFT.....	14	VINEYARD AND ORCHARD	67
FARMING	16	DUAL BLADE HEDGE TRIMMER.....	67
BALE FORK.....	18	INTER-ROW MOWER.....	69
FEED DISPENSER.....	20	SHOOT REMOVER.....	68
HAY BALE GRAPPLE.....	19	STAINLESS STEEL TIPPING DUMPER.....	70
HEAVY DUTY SILAGE FORK.....	16	TREE SHAKER WITH COLLECTOR.....	71
HIVE HANDLER.....	25	VINEYARD SPRAYER.....	72
HORSE ARENA HARROW.....	22	VINEYARD TOOL CARRIER.....	73
MANURE FORK.....	17	LANDSCAPING.....	74
RUBBER SCRAPER.....	23	LEVELER.....	81
SCREW FEED PUSHER.....	21	POWER AUGER FOR TREE PLANTING.....	83
SQUARE BALE CLAMP.....	24	POWER HARROW.....	75
DIGGING & CONSTRUCTION.....	26	POWER PLOW.....	78
AUGER.....	30	POWER RAKE.....	76
BACKHOE.....	29	RIPPER.....	79
CEMENT MIXER.....	33	ROTARY TILLER.....	74
COLD PLANER.....	35	STONE BURIER.....	77
CONCRETE MIXING BUCKET.....	34	STUMP GRINDER.....	80
CRUSHER BUCKET.....	38	TREE SPADE.....	82
DEMOLITION JAW.....	37	FORESTRY.....	85
DOZER BLADE.....	26	DUMPER.....	86
GRADER.....	32	HYDRAULIC BIO SHREDDER.....	91
HYDRAULIC BREAKER.....	36	LOG GRAPPLE.....	89
MINI DIGGER.....	28	LOG SPLITTER.....	90
OPTIONS FOR AUGER.....	31	TIMBER GRAB.....	87
SCREENING BUCKET.....	39	TREE SHEAR.....	88
TRENCHER.....	27	WINCH.....	85
ESTATE & PROPERTY MAINTENANCE.....	40	12 SERIES ATTACHMENTS.....	92
AERIAL WORK PLATFORM.....	52	COMBO BUCKET.....	92
DEBRIS AND LEAF BLOWER.....	54	GENERAL BUCKET.....	92
HIGH PRESSURE WASHER.....	50	PALLET FORK.....	93
LEAF VACUUM.....	42	SILAGE FORK.....	93
ROTARY SWEEPER.....	41	SNOW BLOWER.....	92
SALT AND SAND SPREADER.....	48	SWEEPER.....	93
SNOW BLADE.....	44	OTHER ATTACHMENTS	94
SNOW BLOWER.....	47	ALUMINIUM RAMPS.....	94
SNOW PLOW.....	45	OPTIONS FOR ATTACHMENTS	95
STAKE INSTALLER.....	51	ATTACHMENT COUPLING PLATE.....	95
STREET WASHER.....	53	MULTI CONNECTOR ADAPTOR FOR MACHINES.....	95
SWEEPER WITH COLLECTOR.....	40	MULTI CONNECTOR ADAPTORS FOR ATTACHMENTS.....	95
TRAILER.....	49	SKID-STEER ATTACHMENT ADAPTER PLATE.....	97
V-BLADE SNOW PLOW - PL SERIES.....	46	TILT ADAPTER.....	96

GENERAL BUCKET

<http://tiny.cc/generalbucket>



FEATURES & BENEFITS

- Heavy Duty construction
- Cutting edge designed for bolt on teeth

The MultiOne bucket design enables good visibility to the cutting edge, making loading, grading, and dumping more efficient. Heavy duty steel construction includes slide wear bars on the bottom of the bucket, and the cutting edge is designed for bolt-on teeth.



Model	Volume*	Width	Deep	Height	Weight	Nr. of teeth	Code	Price
110	205 l (7.2 ft ³)	110 cm (43.3 in)	63 cm (24.8 in)	52 cm (20.5 in)	72 kg (159 lbs)	6	C890006	603.00 \$
130	240 l (8.5 ft ³)	130 cm (51.2 in)	63 cm (24.8 in)	52 cm (20.5 in)	93 kg (205 lbs)	8	C890005	728.00 \$
150	280 l (9.9 ft ³)	150 cm (59 in)	63 cm (24.8 in)	52 cm (20.5 in)	106 kg (234 lbs)	9	C890004	841.00 \$
180	340 l (12 ft ³)	180 cm (71 in)	63 cm (24.8 in)	52 cm (20.5 in)	126 kg (278 lbs)	11	C890008	992.00 \$

(*) verify the lifting capacity of the machine

Accessories		Weight	Code	Price
Tooth		1,7 kg (3.7 lbs)	C890007	29.00 \$

Compatibility	1.1 M14	2.3 MK-MZ	5.20 S520	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
110	Very compatible	Compatible	Compatible	Compatible											
130	Very compatible	Compatible	Compatible	Compatible											
150	Very compatible	Compatible	Compatible	Compatible											
180	Very compatible	Compatible	Compatible	Compatible											

(*) C890025 adapter required

Very compatible Compatible Not compatible



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

HEAVY DUTY GENERAL BUCKET WITH REPLACEABLE BOLT-ON CUTTING EDGE OR RAKE TEETH



Model	Volume struck*	Volume heaped*	Width	Deep	Height	Weight	Code	Price
44	6,4 cu.ft. (0,24 cu. yd.)	8,6 cu.ft. (0,32 cu. yd.)	44 in	24 in	21 in	230 lbs	CB890006	751.00 \$
52	7,6 cu.ft. (0,28 cu. yd.)	10,1 cu.ft. (0,37 cu. yd.)	52 in	24 in	21 in	255 lbs	CB890005	924.00 \$
60	8,8 cu.ft. (0,32 cu. yd.)	11,7 cu.ft. (0,43 cu. yd.)	60 in	24 in	21 in	285 lbs	CB890004	1,050.00 \$

(* verify the lifting capacity of the machine)

Accessories

Bolt-on Cutting Edge* (1)	Weight	Code	Price
44	70 lbs	CB890006CE	258.00 \$
52	80 lbs	CB890005CE	294.00 \$
60	90 lbs	CB890004CE	322.00 \$
Rake Tooth Edge (2)	Weight	Code	Price
44	50 lbs	CB890006RT	635.00 \$
52	65 lbs	CB890005RT	672.00 \$
60	75 lbs	CB890004RT	718.00 \$
Bolt-on Tooth Bar (BOTB) (3)	Weight	Code	Price
44	55 lbs	CB890006TB	699.00 \$
52	65 lbs	CB890005TB	736.00 \$
60	80 lbs	CB890004TB	782.00 \$

(* Cutting edge includes plow bolts and nuts)

BOTB replacement parts	Code	Price
Replacement Tooth	BOT-RT	41.00 \$
Replacement shank, tooth, flex pin	BOT-ST	94.00 \$
Replacement flex pin	BOT-FP	7.00 \$



Compatibility	1.1 M14	22-23 MK-MZ	3520 S520	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT800	9.6 GT900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
44	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
52	Very compatible	Very compatible	Compatible	Compatible	Compatible										
60	Very compatible	Very compatible	Compatible	Compatible	Compatible										

(* C890025 adapter required)



LIGHT MATERIAL BUCKET

<http://tiny.cc/lightmatbucket>



FEATURES & BENEFITS

- High capacity
- Reinforced body

Designed for moving high volumes of light weight materials, including grain, forage materials, wood chips, mulch, and snow.



Model	Volume*	Width	Deep	Height	Weight	Code	Price
110	400 l (14 ft ³)	110 cm (43.3 in)	76 cm (29.9 in)	77 cm (30.3 in)	90 kg (198 lbs)	C890053	868.00 \$
130	480 l (17 ft ³)	130 cm (51.2 in)	76 cm (29.9 in)	77 cm (30.3 in)	102 kg (225 lbs)	C890054	936.00 \$
150	550 l (19.4 ft ³)	150 cm (59 in)	76 cm (29.9 in)	77 cm (30.3 in)	112 kg (247 lbs)	C890052	1,139.00 \$
180	660 l (23.3 ft ³)	180 cm (71 in)	76 cm (29.9 in)	77 cm (30.3 in)	127 kg (280 lbs)	C890055	1,274.00 \$

(*) verify the lifting capacity of the machine

Compatibility	11 M14	22-23 MK-MZ	5520 5525	42 52	53 72	63	73	84	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
100	Not compatible	Compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible
130	Not compatible	Compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible
150	Not compatible	Compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible
180	Not compatible	Compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

HEAVY DUTY LIGHT MATERIAL BUCKET WITH REPLACEABLE BOLT-ON CUTTING EDGE



Model	Volume struck*	Volume heaped*	Width	Deep	Height	Weight	Code	Price
44	10 cu.ft. (0,38 cu.yd.)	13,7 cu.ft. (0,51 cu.yd.)	44 in	31 in	26 in	275 lbs	CB890053	941.00 \$
52	12,1 cu.ft. (0,45 cu. yd.)	16,2 cu.ft. (0,6 cu.yd.)	52 in	31 in	26 in	305 lbs	CB890054	996.00 \$
60	14 cu.ft. (0,52 cu. yd.)	18,7 cu.ft. (0,69 cu.yd.)	60 in	31 in	26 in	335 lbs	CB890052	1,227.00 \$
72	20 cu.ft. (0,74 cu. yd.)	27 cu.ft. (1 cu.yd.)	72 in	31 in	31 in	465 lbs	CB890055	1,375.00 \$

(* verify the lifting capacity of the machine)

Accessories

Bolt-on Cutting Edge* (1)	Weight	Code	Price
44	70 lbs	CB890053CE	258.00 \$
52	80 lbs	CB890054CE	294.00 \$
60	90 lbs	CB890052CE	322.00 \$
72	115 lbs	CB890055CE	350.00 \$

(* Cutting edge includes plow bolts and nuts)

Compatibility	11 M14	22-23 MK-MZ	5520 S525	42 512	53 712	63	73	84	9.5 GT350	9.6 GT360	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
44	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
52	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
60	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
72	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

GRAPPLE BUCKET

<http://tiny.cc/grapplebucket>



FEATURES & BENEFITS

- Heavy duty construction
- Suitable for loose material handling

This bucket is ideally designed to dig and grab difficult material. Heavy duty steel bucket design, combined with the center mounted hydraulic cylinder and efficiently designed grapple teeth, enable this bucket to do multiple jobs, from loading and grading loose soils and materials, to grabbing and loading awkward materials.



Model	Width	Deep	Height	Weight	Code	Price
110	110 cm (43.3 in)	67 cm (26.4 in)	47 cm (18.5 in)	119 kg (262 lbs)	C890062	1,938.00 \$
130	130 cm (51.2 in)	67 cm (26.4 in)	47 cm (18.5 in)	134 kg (295 lbs)	C890066	2,045.00 \$

Compatibility	M14	22-23 MK-MZ	S520 S525	A2 S2	E32 L	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
110															
130															

(*) C890025 adapter required



DEMOLITION GRAPPLE BUCKET


<http://tiny.cc/demolitiongrapplebucket>



FEATURES & BENEFITS

- Move hard to handle materials easily
- Two hydraulic grapples easy to operate
- Handles bulky, uneven loads securely

This bucket is designed to handle bulky, irregularly shaped objects found in demolition, industrial, construction, recycling. Ideal for trees, large rocks, bush, industrial and demolition scrap, and recycling debris.

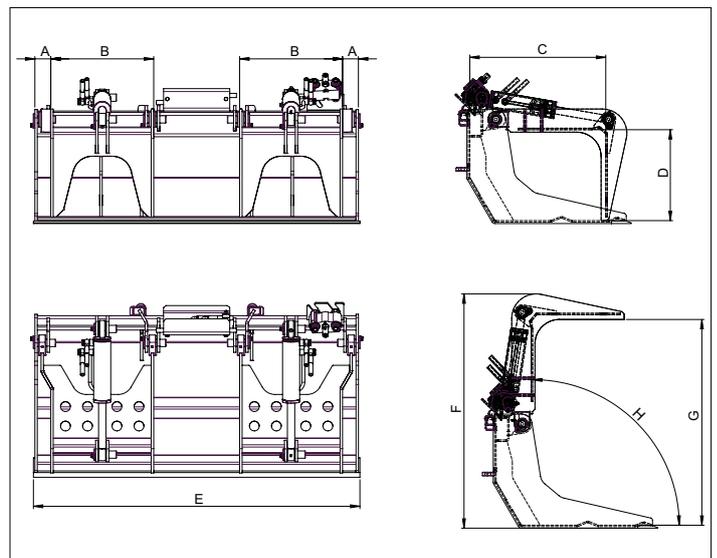

Dimensions (mm/in)								
	A	B	C	D	E	F	G	H
Mod. 130	65/2.6	420/16.5	555/21.8	374/14.7	1333/52.5	963/38	846/33	90°
Mod. 150	65/2.6	420/16.5	555/21.8	374/14.7	1533/60	963/38	846/33	90°

Model	Width	Weight	Code	Price
130	130 cm (51.2 in)	200 kg (441 lbs)	C890063	3,328.00 \$
150	150 cm (59 in)	220 kg (485 lbs)	C890064	3,640.00 \$

Compatibility	1.1 M14	2.3 MK-MZ	3.520 S525	4.2 5.2	5.32 5.7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
130															
150															

(*) C890025 adapter required

Very compatible
 Compatible
 Not compatible



COMBO BUCKET

<http://tiny.cc/multipurposebucket>



FEATURES & BENEFITS

- Heavy Duty construction
- Hydraulic locking valve for load holding
- Increased dumping height
- Multiple functions: digging, dozing, grading, grappling, and dumping

This multi-purpose bucket enables can be used for demolition, landscaping, and general construction work. When used as a grapple, the dual cylinders, equipped with load holding valves, provide a secure clamping force. Open the bucket for fine grading. In dumping operations, loading height is increased by opening the bucket. Heavy duty steel construction includes a cutting edge that is designed for bolt-on teeth.



Model	Volume*	Width	Deep	Height	Weight	Nr. of teeth	Code	Price
110	260 l (9.2 ft ³)	110 cm (43.3 in)	81 cm (32 in)	65 cm (25.6 in)	149 kg (329 lbs)	6	C890075	2,756.00 \$
130	310 l (11 ft ³)	130 cm (51.2 in)	81 cm (32 in)	65 cm (25.6 in)	182 kg (401 lbs)	8	C890076	2,938.00 \$
150	385 l (13.6 ft ³)	150 cm (59 in)	81 cm (32 in)	65 cm (25.6 in)	198 kg (437 lbs)	9	C890077	3,068.00 \$

(*) verify the lifting capacity of the machine

Accessories		Weight	Code	Price
Tooth		1,7 kg (3.7 lbs)	C890007	29.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S520	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
110	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
130	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
150	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(*) C890025 adapter required

Very compatible Compatible Not compatible



HIGH TIP BUCKET

<http://tiny.cc/hightipbucket>



FEATURES & BENEFITS

- Hydraulic operation
- Heavy Duty design
- It increases dump height
- Excellent volume

Increase the dump height of the machine by almost 60 cm (24 in) using the high tip bucket. This increased reach enables loading high-side trucks without the need of a ramp. The bucket is available with a flat cutting edge.



Model	Volume*	Width	Deep	Height	Weight	Code	Price
100	210 l (8.1 ft³)	100 cm (39.4 in)	86 cm (33.8 in)	61 cm (24 in)	154 kg (339 lbs)	C890090	1,922.00 \$
130	280 l (9.9 ft³)	130 cm (51.2 in)	86 cm (33.8 in)	61 cm (24 in)	174 kg (384 lbs)	C890092	2,408.00 \$
150	320 (11.3 ft³)	150 cm (59 in)	86 cm (33.8 in)	61 cm (24 in)	188 kg (414 lbs)	C890093	2,824.00 \$
180	380 (13.4 ft³)	180 cm (71 in)	86 cm (33.8 in)	61 cm (24 in)	208 kg (460 lbs)	C890094	3,245.00 \$

(*) verify the lifting capacity of the machine

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-3.9 S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
100	Red		Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
130	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
150	Red		Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
180	Red		Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(*) C890025 adapter required

Very compatible (Green bar) Compatible (Yellow bar) Not compatible (Red bar)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

PALLET FORK

<http://tiny.cc/palletfork>




FEATURES & BENEFITS

- **Must-have attachment**
- **Heavy duty construction**
- **Adjustable fork width**

The quick attach pallet fork enables safe and quick handling of multiple sized pallets.

The forks are forged from high strength steel, and are available in several lengths based on model size. The fork frame is designed to allow the width of the forks to be easily adjusted by as much as 1 m (39 in).

Standard bolt on back stop provides additional safety.

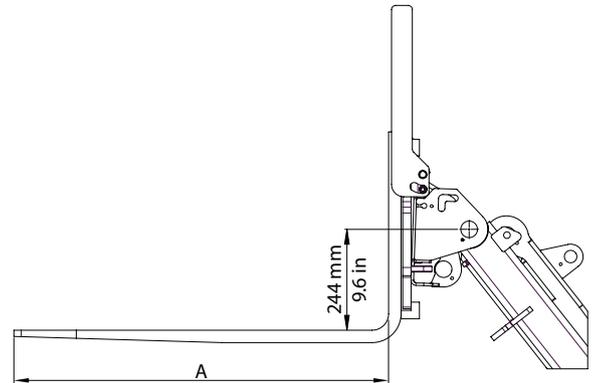

Model	Forks Length (A)	Lifting Capacity ³	Width	Weight	Code	Price
Frame (without forks) ¹	/	/	100 cm (39,4 in)	31 kg (68 lbs)	C890330	470.00 \$
90 (forks pair) ²	90 cm (35.4 in)	1000 kg (2204 lbs)	/	54 kg (119 lbs)	C890331	520.00 \$
110 (forks pair) ²	110 cm (43.3 in)	1200 kg (2646 lbs)	/	68 kg (150 lbs)	C890332	619.00 \$
120 (forks pair) ²	120 cm (47.3 in)	2000 kg (4408 lbs)	/	104 kg (230 lbs)	C890333	723.00 \$

(¹) C890331, C890332 or C890333 required - (²) C890330 required - (³) verify the lifting capacity of the machine

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT850	9.6 GT950	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
90	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
110	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
120	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(*) C890025 adapter required

Very compatible (Green bar) Compatible (Yellow bar) Not compatible (Red bar)



PALLET FORK HYDRAULIC CLAMP

<http://tiny.cc/hydraulicclamp>



FEATURES & BENEFITS

- A unique option for the pallet fork system
- Secures awkward loads to the forks

The pallet fork attaches to the pallet fork frame, changing the pallet fork to a versatile grapple system. The hydraulically operated grapple secures loads awkward loads like logs, poles, large tubes, and more.

The hydraulic clamp assembly requires either a model C890330 pallet fork (not included with the hydraulic clamp).



Model	Min. diameter to grab	Max. diameter to grab	Weight	Code	Price
Pallet Fork Hydraulic Clamp	40 cm (15.7 in)	90 cm (35.4 in)	46 kg (102 lbs)	C890585	1,439.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*	

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

JIB CRANE, ONE-PIECE OR TELESCOPIC

<http://tiny.cc/jibcrane>




FEATURES & BENEFITS

- Useful for great outreach and high lift
- Hook included
- Great visibility

The MultiOne Jib Crane provides additional reach for lifting operations. The jib crane is available in either a one piece design or a hydraulically adjustable telescopic design. Each of these designs includes a heavy duty safety hook.

The telescopic jib crane enables the load to be kept close to the machine and then extended outwards for placement.

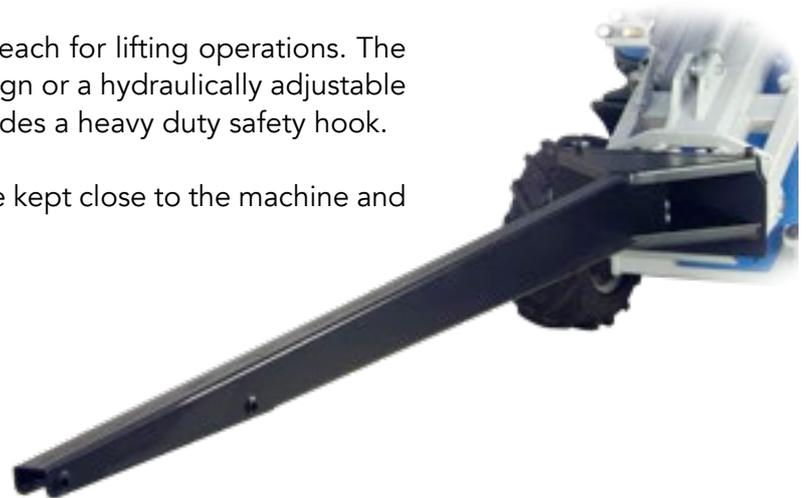

Model	Length	Structural capacity*	Weight	Code	Price
One-piece	250 cm (98.4 in)	200 kg (440 lbs)	41 kg (90.4 lbs)	C890710	551.00 \$
Telescopic	110+60 cm (43.3+23.6 in)	500 kg (1100 lbs)	85 kg (187.4 lbs)	C890712	1,802.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S325	4.2 5.2	5.2 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
One-piece															
Telescopic															

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

BIG BAG LIFTER

<http://tiny.cc/bigbaglifter>



FEATURES & BENEFITS

- Simple and efficient
- Rounded anti-swing side bars

This attachment enables safe and efficient handling of the oversized product bags containing fertilizer, corn, wood pellets, briquettes, and other granular products.

The anti-sway side bars increase operating safety.

The heavy-duty construction has been widely tested, proving to be strong, reliable and durable.



Model	Lifting Capacity*	Max Width	Lift Hook Height	Weight	Code	Price
Big Bag Lifter	1200 kg (2645 lbs)	100 cm (39.4 in)	133 cm (52.4 in)	49 kg (108 lbs)	C890713	874.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*	
	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Red
				Very compatible			Compatible			Not compatible						

(* C890025 adapter required)



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

PALLET FORK WITH SIDE SHIFT


<http://tiny.cc/palletforkwithsideshift>



FEATURES & BENEFITS

- **Hydraulically control shift**

Hydraulically side shifting the forks enables easier and safer handling and loading of a wide variety of pallet sizes. Bolt-on back stop provides additional safety.

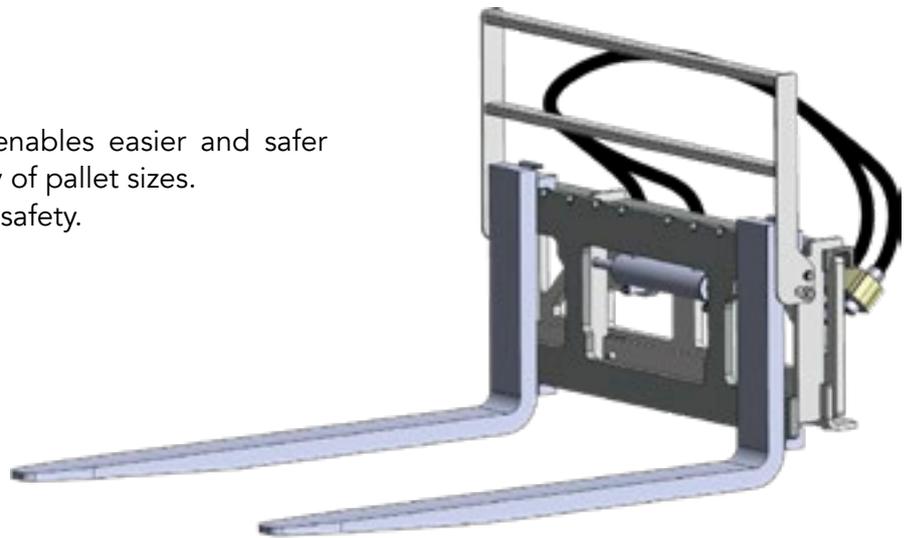

Model	Forks Length	Lifting Capacity ³	Side Shift	Weight	Code	Price
Frame (without forks) ¹	/	/	8,5 cm (3.3 in) (DX) 8,5 cm (3.3 in) (SX)	96 kg (212 lbs)	C890316	3,313.00 \$
90 (forks pair) ²	90 cm (35.4 in)	1000 kg (2204 lbs)		54 kg (119 lbs)	C890331	520.00 \$
110 (forks pair) ²	110 cm (43.3 in)	1200 kg (2646 lbs)		68 kg (150 lbs)	C890332	619.00 \$
120 (forks pair) ²	120 cm (47.3 in)	2000 kg (4408 lbs)		104 kg (230 lbs)	C890333	723.00 \$

(¹) C890331 or C890332 or C890333 required - (²) C890316 required - (³) verify the lifting capacity of the machine

Compatibility	1.1 M14	2.3 MK-MZ	3.20 S520	4.2 S2	5.3 T2	6.3	7.3	8.4	9.5 GT800	9.6 GT900	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
90	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
110	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
120	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(*) C890025 adapter required

Very compatible (Green) Compatible (Yellow) Not compatible (Red)



LIFTING TROLLEY

<http://tiny.cc/liftingtrolley>



FEATURES & BENEFITS

- Designed to safely lift and handle heavy loads
- Excellent fork visibility

The lifting trolley is ideal for lifting and handling heavy pallets, oversized material bags, and other heavy materials. This unit can also be used to load and unload trucks and trailers.

The lifting trolley is equipped with foam filled rough terrain tires to allow all terrain materials transport.



Model	Forks Length	Lifting Capacity*	Max Height	Weight	Code	Price
Lifting Trolley	90 cm (35.4 in)	1000 kg (2204 lbs)	175 cm (69 in)	216 kg (476 lbs)	C890481	5,382.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
	Very compatible						Compatible				Not compatible				

(* C890025 adapter required)



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

HEAVY DUTY SILAGE FORK

<http://tiny.cc/silagefork>



FEATURES & BENEFITS

- Heavy duty frame
- Versatile and efficient
- Replaceable teeth

The multi-purposed silage fork, in combination with the frame top hydraulic clamp, makes moving loose or baled silage safe and easy. The extra strength framework allows heavy loads, like round bales, log piles and more, to be safely and effectively moved. The lower fork teeth are easily removed and replaced when worn.



Model	Width	Nr. of teeth	Weight	Code	Price
80	80 cm (31.5 in)	5	67 kg (148 lbs)	C895061	1,346.00 \$
95	95 cm (37.4 in)	6	88 kg (194 lbs)	C890354	1,560.00 \$
120	120 cm (47.3 in)	8	110 kg (242 lbs)	C890352	2,287.00 \$
150	150 cm (59 in)	9	130 kg (287 lbs)	C890353	2,543.00 \$

Compatibility	11 M14	22-23 MK-MZ	35-20 S525	42 512	53 712	63	73	84	9.5 GT350	9.6 GT360	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
80	Green	Green	Red	Red	Red	Red	Red	Red	Red	Red	Red	Red	Red	Red	Red
95	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
120	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
150	Red	Red	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow

(*) C890025 adapter required

Very compatible Compatible Not compatible



MANURE FORK

<http://tiny.cc/manurefork>



FEATURES & BENEFITS

- Simple design
- Strong, replaceable teeth

The manure fork is designed to easily handle loose materials like hay, straw, or animal bedding. The simple design promotes easy handling of manure.

When worn, the fork teeth are quickly and easily replaced.



Model	Width	Teeth length	Nr. of teeth	Weight	Code	Price
80	110 cm (43.3 in)	80 cm (31.5 in)	10	60 kg (132.3 lbs)	C890380	1,099.00 \$
110	110 cm (43.3 in)	110 cm (43.3 in)	10	85 kg (187.4 lbs)	C890381	1,254.00 \$

Compatibility	M14	22-23 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1880	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
80															
110															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

BALE FORK

<http://tiny.cc/roundbalefork>



FEATURES & BENEFITS

- Efficient
- Reliable

Designed to carry any kind of bales. The load balancing spikes are bolted into the fork body, making them easily replaceable.



Model	Width	Teeth length	Weight	Code	Price
Bale Fork (2 Teeth)	85 cm (33.5 in)	2 x 80 cm (31.5 in)	40 kg (88.2 lbs)	C890400	784.00 \$
Bale Fork (3 Teeth)	85 cm (33.5 in)	2 x 110 cm (43.3 in) + 1 x 80 cm (31.5 in)	45 kg (99.2 lbs)	C890401	879.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S325	4.2 5.2	5.32 5.7	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Bale Fork - 2 Teeth															
Bale Fork - 3 Teeth															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

HAY BALE GRAPPLE

<http://tiny.cc/balegrabber>



FEATURES & BENEFITS

- Firmly grabs round bales without damaging surface wrap
- Versatile

This grapple is designed to safely and securely lift and move round hay bales up to 160 cm (5.25 ft) in diameter. The two hydraulically operated clamps provide a great grip over a wide surface area without damaging the bale wrap, and automatically center the load for safe and stable travel and handling.



Model	Max bale weight*	Min. Diameter for bale	Max. Diameter for bale	Weight	Code	Price
Hay Bale Grapple	1000 kg (2204 lbs)	97 cm (38.2 in)	160 cm (63 in)	130 kg (286.6 lbs)	C890410	2,543.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S325	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*	

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

FEED DISPENSER

<http://tiny.cc/feeeddispenser>



FEATURES & BENEFITS

- Efficient
- Easy to load
- Fast

MultiOne's animal feed dispensers bucket makes feeding the animals quick and easy. The front edge of the feed dispenser bucket can be used to easily fill up the bucket feeder. Feed is dispensed from the right side discharge chute, using the hydraulically powered auger located at the bottom of the feeder. The feed dispenser is designed to handle any sized grain and mix, making animal feeding a quick and simple process.



Model	Capacity*	Width	Discharge Side	Weight	Code	Price
350	350 l (12.4 ft ³)	130 cm (51.2 in)	Right	140 kg (309 lbs)	C890420	1,922.00 \$
520	520 l (18.4 ft ³)	180 cm (70.9 in)	Right	210 kg (463 lbs)	C890421	2,420.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S325	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G198D	9.6 G198D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
350															
520															

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SCREW FEED PUSHER

<http://tiny.cc/feedpusher>




FEATURES & BENEFITS

- Fast and easy way of moving feed to the animals
- Discharge in the right side
- High efficiency, also on larger farms
- Rear rubber scraper blade

Efficient way of moving uneaten feed back in front of the cattle. When moving, the screw mixes the feed and the fresh feed remains on top.

With the screw feed pusher drive speed can be higher. The rubber scraper blade at the rear of the attachment cleans the floor very efficiently. Once worn out, the rubber blade can be disassembled and reassembled backwards or replaced.

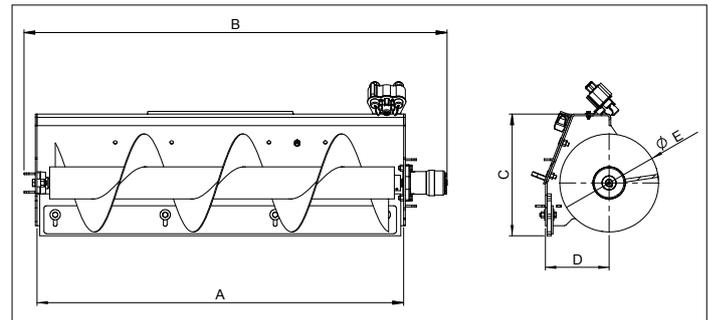

Dimensions					
	A	B	C	D	E
mm	1300	1500	435	226	350
in	51.2	59	17.1	8.9	13.8

Model	Working Width	Height	Weight	Code	Price
Screw Feed Pusher	130 cm (51.2 in)	43,5 cm (17.1 in)	115 kg (254 lbs)	C890250	2,005.00 \$


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD	12.4*	EZ

(*) C89025 adapter required



HORSE ARENA HARROW


<http://tiny.cc/horsearenaharrow>



FEATURES & BENEFITS

- Multi-function surface processing
- Fast end easy to adjust
- Time saving attachment

The horse arena harrow is designed to smooth and level sandy or mixed media horse riding surfaces. The harrow features multiple processes, beginning with the spring tines to break up the surface, a leveler to smooth and level the surface, and the compacting and spreader auger roller assembly that finishes the surface. The harrow also has side wheels that enable working along walls with no damage. Easily made adjustments enable weight and balance adjustments between the spring tines and roller/spreader assembly. Height adjustments to enhance processing difficult soils are made quickly and easily.

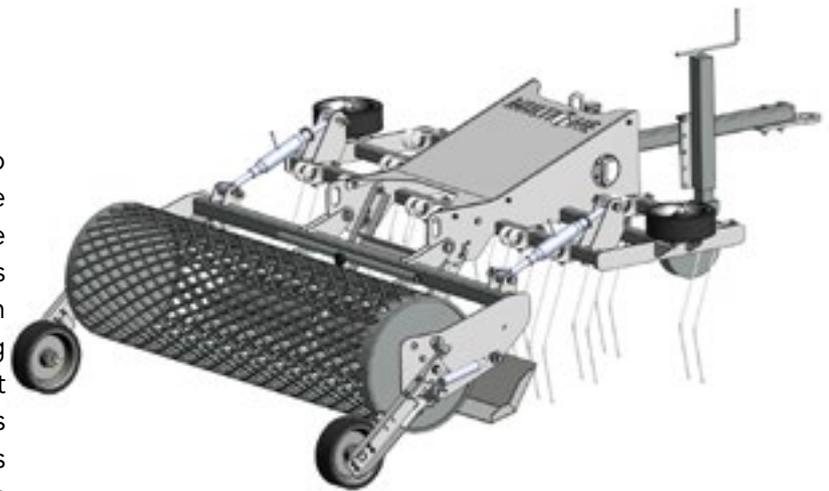

Model	Width	Working Depth	Weight	Code	Price
160	160 cm (63 in)	0 - 9 cm (0 - 3.5 in)	180 kg (397 lbs)	C891231	5,200.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 G1980	9-6 G1980	10	6-3SD	7-3SD 8-4SD	9-5SD	124*
Model															
160															

(*) C890025 adapter required


Very compatible
Compatible
Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

RUBBER SCRAPER

<http://tiny.cc/rubberscraper>



FEATURES & BENEFITS

- Heavy duty rubber blade
- The each ends of the scraper blade can be adjusted forwards

The MultiOne rubber scraper is ideal for cleaning smooth surfaces in farm buildings and yards, improving hygiene and footing.



Model	Width	Rubber Height	Weight	Code	Price
150	150 cm (59 in)	35 cm (13.8 in)	73 kg (161 lbs)	C890361	2,153.00 \$
200	200 cm (78.7 in)	35 cm (13.8 in)	60 kg (133 lbs)	C890358	2,355.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S525	4.2 5.2	5.7 7.1	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
150															
200															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SQUARE BALE CLAMP

<http://tiny.cc/squarebales>




FEATURES & BENEFITS

- Suitable for bales from 75 cm (29.5 in) to 230 cm (90.5 in)
- 2 cylinders
- No sharp edges

This clamp was designed to transport and stack round and square bales. Made from heavy duty galvanized steel, this clamp quickly and easily handles all types of bales, including silage, hay, and straw. The large clamp arms makes pick-up and storage of all bale sizes quick and easy.



Dimensions					
	A	B	C	D	E
mm	2318	1115	2706	690	1758
in	91.2	43.9	106.5	27.2	69.2

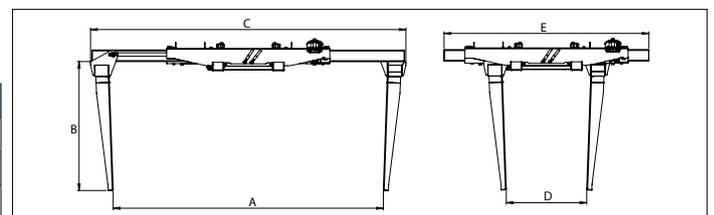

Model	Max bale weight*	Min bale length	Max bale length	Weight	Code	Price
Square Bale Clamp	1000 kg (2204 lbs)	75 cm (29.5 in)	230 cm (90.5 in)	270 kg (595 lbs)	C890415	3,363.00 \$

(*) verify the lifting capacity of the machine

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S325	4.2 5.2	5.3-2 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
	Very compatible						Compatible				Not compatible				

(*) C890025 adapter required



HIVE HANDLER

<http://tiny.cc/hiveslifter>



FEATURES & BENEFITS

- Smart design
- Easy to use, efficient
- Designed for a special purpose

Ideal design for beekeepers, this unit makes carrying and transporting bee hives quick, easy, and safe. The top frame stabilizes the hives, securing them onto the bottom forks. Different sizes are available, suited to various hive styles.



Model	Length	Height	Max load capacity*	Forks Length	Weight	Code	Price
160	105 cm (41.3 in)	90/160 cm (35.4/63 in)	1000 kg (2204 lbs)	46/71 cm (18/28 in)	150 kg (330 lbs)	C890690	3,355.00 \$
240	105 cm (41.3 in)	135/240 cm (53.1/94.5 in)	1000 kg (2204 lbs)	46/71 cm (18/28 in)	150 kg (330 lbs)	C890691	3,667.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-1M2	3.5-20 S025	4.2 5.2	5.7-1	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
160															
240															

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

DOZER BLADE

<http://tiny.cc/dozerblade>



FEATURES & BENEFITS

- Rugged design delivers maximum uptime
- Dozer blade can be angled 30 degrees left and right

The rugged design of the dozer blade makes a wide variety of jobs, from scraping hard soils, to grading and stacking loose soils, quick and easy. An ideal tool for projects from rough construction through fine landscaping.



Model	Width	Slewing angle	Height	Weight	Code	Price
140	140 cm (55.1 in)	±30°	53 cm (20.8 in)	90 kg (198 lbs)	C890470	1,922.00 \$
180	180 cm (71 in)	±30°	53 cm (20.8 in)	105 kg (232 lbs)	C890477	2,480.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S325	4.2 5.2	5.3 7.1	6.3	7.3	8.4	9.5 G1880	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
140															
180															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TRENCHER



<http://tiny.cc/trencher>



FEATURES & BENEFITS

- With slide for easy depth control
- High quality trenching

This machine creates trenches with minimal damage to lawns and gardens. When the trencher is used in combination with the crumber and the high quality trencher chains, clean trenches are quickly created regardless of the ground conditions. Trouble free operation is assured through the planetary final drive and heavy duty hydraulic motor. If the trenching being done is in vegetative ground, the standard trencher is the best choice, if the ground is hard and rocky, select the HD version.

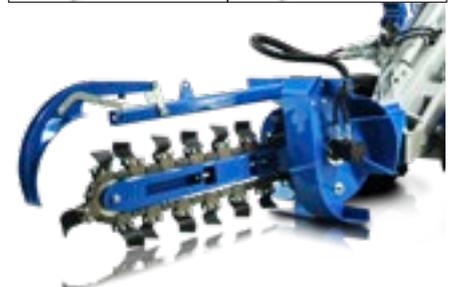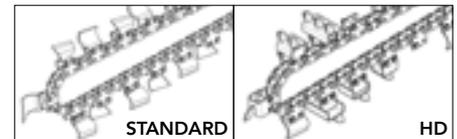

Model	Digging Depth	Digging Width	Weight	Code	Price
Trencher 60 (for normal ground)	60 cm (23.6 in)	14 cm (5.5 in)	175 kg (386 lbs)	C890200	4,368.00 \$
Trencher 90 (for normal ground)	90 cm (35.4 in)	16 cm (6.3 in)	190 kg (419 lbs)	C890201	4,576.00 \$
Trencher 120 (for normal ground)	120 cm (47.2 in)	18 cm (7 in)	203 kg (448 lbs)	C890202	5,616.00 \$
Heavy duty trencher 60 (for hard ground)	60 cm (23.6 in)	12 cm (4.7 in)	180 kg (397 lbs)	C890203	4,576.00 \$
Heavy duty trencher 90 (for hard ground)	90 cm (35.4 in)	12 cm (4.7 in)	195 kg (430 lbs)	C890204	4,784.00 \$
Heavy duty trencher 120 (for hard ground)	120 cm (47.2 in)	12 cm (4.7 in)	215 kg (474 lbs)	C890205	5,824.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	3520 3525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT190	9-6 GT190	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
Model															
Trencher 60	Very compatible	Compatible	Compatible	Compatible	Compatible										
Trencher 90	Very compatible	Compatible	Compatible	Compatible	Compatible										
Trencher 120	Very compatible	Compatible	Compatible	Compatible	Compatible										
Trencher 60 HD	Very compatible	Compatible	Compatible	Compatible	Compatible										
Trencher 90 HD	Very compatible	Compatible	Compatible	Compatible	Compatible										
Trencher 120 HD	Very compatible	Compatible	Compatible	Compatible	Compatible										


(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

MINI DIGGER


<http://tiny.cc/minidigger>



FEATURES & BENEFITS

- Easy to use
- Effective and usefull
- 90° rotation available

The mini digger is an efficient solution for small excavating projects. Through the use of the standard MultiOne controls, excavating operations are simple and effective. Available with 90° rotation for easy work.

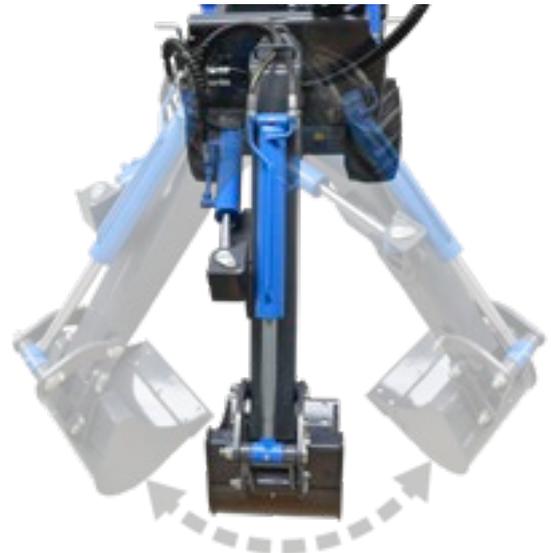

Model	Length	Weight	Code	Price
Mini-digger with bucket 25 cm (9.8 in)	130 cm (51.2 in)	70 kg (154 lbs)	C890116	1,682.00 \$
Mini-digger with bucket 40 cm (15.7 in)	150 cm (59 in)	80 kg (176 lbs)	C890122	2,257.00 \$
90° rotation mini-digger with bucket 40 cm (15.7 in)	165 cm (65 in)	120 kg (265 lbs)	C890121	3,397.00 \$
Options				
Bucket 25 cm (9.8 in) 2d only for C890121 and C890122		25 kg (55 lbs)	C890123	534.00 \$
Bucket 70 cm (27,5 in) 5d only for C890121 and C890122		47 kg (104 lbs)	C890124	1,082.00 \$
Bolt-on tooth kit (each) d		1,7 kg (3.7 lbs)	C890007	29.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
25															
40 / with rotation															


(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

BACKHOE

<http://tiny.cc/backhoe>

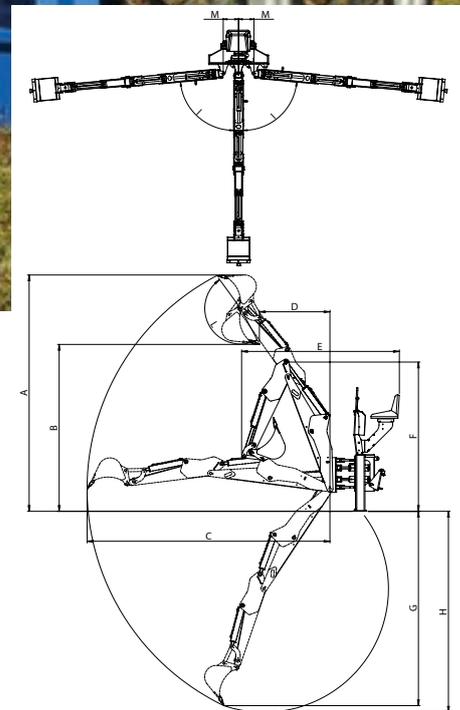

FEATURES & BENEFITS

- Powerful backhoe, with 180° rotation
- Excellent visibility of the digging area

The MultiOne backhoe is a compact yet powerful excavator. It's ideal for landscaping and nursery projects, sewage system and septic tank excavating, water and power line trenching, and many other excavating projects. Using MultiOne's quick mount system, this backhoe is quick and easy to attach. A standard part of the backhoe are the independent operator's seat and hydraulic controls.

	A	B	C	D	E	F	G	H	I	L	M
215	2702 mm (106.4 in)	1766 mm (69.5 in)	2709 mm (106.6 in)	729 mm (28.7 in)	1890 mm (74.4 in)	1749 mm (68.8 in)	2135 mm (84 in)	2212 mm (87 in)	85°	172°	266 mm (10.5 in)
260	3141 mm (123.6 in)	2219 mm (87.4 in)	3204 mm (126 in)	931 mm (36.6 in)	2081 mm (81.9 in)	1984 mm (78.1 in)	2583 mm (101.7 in)	2671 mm (105 in)	85°	172°	266 mm (10.5 in)

Model	Digging Depth	Width	Weight	Code	Price
Backhoe 215 with bucket 40	215 cm (84.6 in)	/	530 kg (1168 lbs)	C890117	7,250.00 \$
Backhoe 260 with bucket 40	260 cm (102.4 in)	/	600 kg (1322 lbs)	C890120	7,631.00 \$
Options					
Bucket 25 - 2d	/	25 cm (9.8 in)	25 kg (55 lbs)	C890123	534.00 \$
Bucket 70 - 5d	/	70 cm (27.5 in)	47 kg (104 lbs)	C890124	1,082.00 \$
Bolt-on tooth kit (each) d	/	/	1,7 kg (3.7 lbs)	C890007	29.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S0525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Backhoe 215															
Backhoe 260															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

AUGER

<http://tiny.cc/auger>



FEATURES & BENEFITS

- Wide range of auger drive units with different torques enables efficient use of augers from 10 cm (4 in) to 100 cm (40 in) diameter
- Drill with tungsten teeth for hard ground

The powerful hydraulic auger drive unit, combined with various auger diameters, provide excellent flexibility in all soil types.

The auger drive is available in three versions:

- T1 for normal soil conditions
- T2 for hard, rocky ground, used with augers up to 50 cm (20 in)
- T3 for hard, rocky ground, used with augers up to 100 cm (40 in)



Model	Torque	Drills	Weight	Code	Price
T1 – standard drive unit	100 kgm	10-50 cm (4 - 19.7 in)	90 kg (198 lbs)	C890830	3,462.00 \$
T2 – heavy duty drive unit	180 kgm	10-50 cm (4 - 19.7 in)	110 kg (242 lbs)	C890831	4,116.00 \$
T3 – heavy duty drive unit	400 kgm	30 - 100 cm (11.8 - 39.4 in)	150 kg (331 lbs)	C890832	5,412.00 \$

Compatibility	1.1 M14	22-23 MK-MZ	3520 S525	4.2 S2	5.3 T2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Auger															
T1	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
T2	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
T3	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(*) C890025 adapter required

Very compatible Compatible Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

OPTIONS FOR AUGER

Heavy Duty Auger Drill	Diameter	Length	Weight	Code	Price
10	10 cm (4 in)	100 cm (39.4 in)	10 kg (22 lbs)	C890840	552.00 \$
15	15 cm (6 in)	100 cm (39.4 in)	15 kg (33 lbs)	C890841	612.00 \$
20	20 cm (7.9 in)	100 cm (39.4 in)	20 kg (44 lbs)	C890842	674.00 \$
25	25 cm (9.8 in)	100 cm (39.4 in)	30 kg (66 lbs)	C890843	820.00 \$
30	30 cm (11.8 in)	100 cm (39.4 in)	35 kg (77 lbs)	C890844	1,009.00 \$
35	35 cm (13.8 in)	100 cm (39.4 in)	40 kg (88 lbs)	C890845	1,199.00 \$
40	40 cm (15.7 in)	100 cm (39.4 in)	47 kg (104 lbs)	C890846	1,296.00 \$
50	50 cm (19.7 in)	100 cm (39.4 in)	56 kg (124 lbs)	C890847	1,369.00 \$
60	60 cm (23.6 in)	100 cm (39.4 in)	66 kg (146 lbs)	C890849	2,422.00 \$
70	70 cm (27.6 in)	100 cm (39.4 in)	76 kg (168 lbs)	C890851	2,748.00 \$
80	80 cm (31.5 in)	100 cm (39.4 in)	86 kg (190 lbs)	C890853	3,208.00 \$
90	90 cm (35.4)	100 cm (39.4 in)	96 kg (212 lbs)	C890855	3,571.00 \$
100	100 cm (39.4 in)	100 cm (39.4 in)	106 kg (234 lbs)	C890857	3,971.00 \$
Auger Drill w/tugsten teeth Rock Drill	Diameter	Length	Weight	Code	Price
15	15 cm (6 in)	100 cm (39.4 in)	20 kg (44 lbs)	C890880	859.00 \$
20	20 cm (7.9 in)	100 cm (39.4 in)	25 kg (55 lbs)	C890881	952.00 \$
25	25 cm (9.8 in)	100 cm (39.4 in)	30 kg (66 lbs)	C890882	1,147.00 \$
30	30 cm (11.8 in)	100 cm (39.4 in)	35 kg (77 lbs)	C890883	1,408.00 \$
35	35 cm (13.8 in)	100 cm (39.4 in)	40 kg (88 lbs)	C890884	1,681.00 \$
40	40 cm (15.7 in)	100 cm (39.4 in)	47 kg (104 lbs)	C890885	1,809.00 \$
50	50 cm (19.7 in)	100 cm (39.4 in)	56 kg (124 lbs)	C890886	3,389.00 \$
60	60 cm (23.6 in)	100 cm (39.4 in)	66 kg (146 lbs)	C890888	3,389.00 \$
70	70 cm (27.6 in)	100 cm (39.4 in)	76 kg (168 lbs)	C890890	3,995.00 \$
80	80 cm (31.5 in)	100 cm (39.4 in)	86 kg (190 lbs)	C890892	4,479.00 \$
90	90 cm (35.4)	100 cm (39.4 in)	96 kg (212 lbs)	C890894	5,086.00 \$
100	100 cm (39.4 in)	100 cm (39.4 in)	106 kg (234 lbs)	C890896	5,631.00 \$
Auger Drill Extension	Diameter	Length	Weight	Code	Price
10	10 cm (4 in)	100 cm (39.4 in)	15 kg (33 lbs)	C890860	324.00 \$
15	15 cm (6 in)	100 cm (39.4 in)	20 kg (44 lbs)	C890861	366.00 \$
20	20 cm (7.9 in)	100 cm (39.4 in)	25 kg (55 lbs)	C890862	409.00 \$
25	25 cm (9.8 in)	100 cm (39.4 in)	30 kg (66 lbs)	C890863	488.00 \$
30	30 cm (11.8 in)	100 cm (39.4 in)	35 kg (77 lbs)	C890864	602.00 \$
35	35 cm (13.8 in)	100 cm (39.4 in)	40 kg (88 lbs)	C890865	724.00 \$
40	40 cm (15.7 in)	100 cm (39.4 in)	47 kg (104 lbs)	C890866	775.00 \$
50	50 cm (19.7 in)	100 cm (39.4 in)	56 kg (124 lbs)	C890867	820.00 \$
60	60 cm (23.6 in)	100 cm (39.4 in)	66 kg (146 lbs)	C890869	1,453.00 \$
70	70 cm (27.6 in)	100 cm (39.4 in)	76 kg (168 lbs)	C890871	1,695.00 \$
80	80 cm (31.5 in)	100 cm (39.4 in)	86 kg (190 lbs)	C890873	1,936.00 \$
90	90 cm (35.4)	100 cm (39.4 in)	96 kg (212 lbs)	C890875	2,178.00 \$
100	100 cm (39.4 in)	100 cm (39.4 in)	106 kg (234 lbs)	C890877	2,422.00 \$

GRADER


<http://tiny.cc/grader>



FEATURES & BENEFITS

- **Optional laser control package for precise grade control**

The grader attachment converts the MultiOne into a high performance grading system, well suited for confined areas not accessible to larger machines. The hydraulically controlled moldboard is controlled using the cab mounted auxiliary controls. To increase the grader efficiency and precision, the MultiOne's grader can be equipped with an optional laser control system.

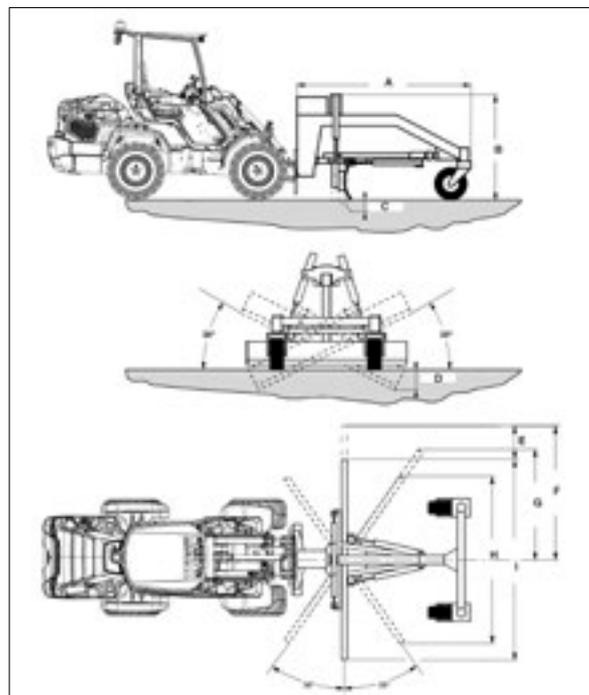

	A	B	C	D	E	F	G	H	I
mm	2220	1320	165	355	400	1466	1090	1735	2130
in	87.4	51.9	6.5	14	15.7	57.7	42.9	68.3	83.8

Model	Blade width	Weight	Code	Price
Grader with hydraulic controls	210 cm (82.7 in)	550 kg (1212 lbs)	C890105	21,578.00 \$
Laser (only receiver) twin angle	/	/	C890106	14,529.00 \$

Compatibility	M14	22-23 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
	Red	Red	Red	Red	Red	Red	Yellow	Yellow	Green	Green	Green	Red	Red	Yellow	Red

(*) C890025 adapter required

Very compatible
Compatible
Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

CEMENT MIXER

<http://tiny.cc/cementmixer>



FEATURES & BENEFITS

- **Faster than a stand alone mixer**
- **Designed to work in hard-to-reach areas**

The hydraulically powered cement mixer is an inexpensive attachment that lets you mix, transport, and pours concrete faster than a stand-alone mixer. This unit's compact size makes it the ideal tool when working on sidewalks, driveways, footings, small building floors, and other hard-to-reach or limited access areas.



Model	Volume*	Weight	Code	Price
Cement Mixer	350 l (12.4 ft ³)	95 kg (210 lbs)	C890131	2,577.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S25	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*	

(* C890025 adapter required)



Very compatible
 Compatible
 Not compatible

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

CONCRETE MIXING BUCKET

<http://tiny.cc/concretemixingbucket>



FEATURES & BENEFITS

- Hydraulically powered mixing and unloading system
- Self loading profile
- Removable safety grill promotes easy cleaning and maintenance

The concrete mixing bucket allows the operator to load, mix, transport, and discharge concrete much faster than the traditional stand-alone mixer and wheel barrow. This unit's compact size, when combined with the MultiOne, makes it ideal for pouring sidewalks, driveways, footings, small buildings floors, and many other limited access locations. Designed for high volume production, this unit minimizes downtime.

Combined with the MultiOne, it becomes an efficient, reliable, and cost efficient system.



Model	Volume*	Outlet Ø	Hose Length	Weight	Code	Price
200	200 l (7 ft ³)	13,5 cm (5.3 in)	160 cm (63 in)	220 kg (485 lbs)	C890140	5,418.00 \$
250	250 l (8.8 ft ³)	18 cm (7.1 in)	150 cm (59 in)	320 kg (706 lbs)	C890141	5,833.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S025	4.2 5.2	5.3-2 7.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
200															
250															

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

COLD PLANER

<http://tiny.cc/asphaltsaw>


FEATURES & BENEFITS

Ideal design for milling damaged asphalt and concrete surfaces in preparation for resurfacing.

The cold planer can be converted from surface planing to slot cutting. Use a cutting disk for cutting expansion crack slots, or slots for embedding wires or tubing.

The standard planer drum, equipped with carbide cutting teeth and the self leveling suspension, efficiently planes the pavement surface.




Model	Digging depth	Max width	Weight	Code	Price
Cold Planer	15 cm (6 in)	35 cm (13.8 in)	620 kg (1367 lbs)	C890160	19,984.00 \$
Cutting disc	15 cm (6 in)	7,5 cm (3 in)	/	C890162	3,766.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
					Very compatible				Compatible			Not compatible			

(*) C890025 adapter required

HYDRAULIC BREAKER

<http://tiny.cc/hydraulicbreaker>



FEATURES & BENEFITS

- Thanks to MultiOne boom it can reach any location

The narrow breaker profile enables the breaker to reach into places that other breakers can't. With a minimum of seals and moving parts, the MultiOne hydraulic breaker provides unsurpassed durability and simplified maintenance.



Model	Impact energy	Impact rate	Ø Tool	Weight	Code	Price
62	140 J	1000/1250 bpm	40 mm (1,6 in)	62 kg (137 lbs)	C890181	5,408.00 \$
90	190 J	1000/1300 bpm	45 mm (1,8 in)	90 kg (198 lbs)	C890180	6,136.00 \$

Compatibility	1,1 M14	2,2-2,3 MK-MZ	3,520 S325	4,2 5,2	5,3 7,2	6,3	7,3	8,4	9,5 G180	9,6 G180	10	6,3SD	7,3SD 8,4SD	9,5SD	12,4*
Model															
62															
90															

(*) C890025 adapter required

Very compatible
 Compatible
 Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

DEMOLITION JAW

<http://tiny.cc/cuttercrusher>



FEATURES & BENEFITS

- **Powerful**
- **360° hydraulic rotation**

Powerful, hydraulically operated crushing jaws can pick-up and crush concrete with ease. The cutter jaw portion of the machine can cut rebar, wire mesh, angle iron, and I-beams.

Low levels of vibration and noise enable the demolition jaw to complete concrete demolition projects in restricted areas.



Model	Max jaws opening	Max power at the tips	Max cutting power	Rotation	Weight	Code	Price
Demolition jaw	43 cm (16.9 in)	335 kN	920 kN	360° (endlessly)	200 kg (485 lbs)	C891250	18,826.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
	Very compatible						Compatible				Not compatible				

(*) C890025 adapter required



CRUSHER BUCKET

<http://tiny.cc/crushingbucket>



FEATURES & BENEFITS

- Crushes all demolished stone materials
- Crushes materials directly on site
- Easy and fast processing
- Recycle project materials on-site, saving time and money

The MultiOne crusher bucket easily crushes concrete, stone, or asphalt, making ready to use product on the job site. The self loading design can discharge the crushed material directly where it is needed.

The crusher bucket is not hampered by wet, muddy, or dirty debris.

The crusher bucket, when attached to a MultiOne, can work in almost any project location, from industrial to urban areas, road projects to mines and quarries, and more.



Model	Volume*	Width	Oil Flow	Oil Pressure	Weight	Code	Price
Crusher Bucket	300 l (10.6 ft ³)	140 cm (55 in)	40-80 l/min (10.6-21.1 gal/min)	150-300 bar	570 kg (1256 lbs)	C891261	28,239.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	22-23 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
	Very compatible					Compatible					Not compatible				

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SCREENING BUCKET

<http://tiny.cc/screeningbucket>




FEATURES & BENEFITS

- Heavy duty construction
- Easy and fast processing
- Separate project materials on-site, saving time and money

The MultiOne screening bucket separates different sized materials thanks to its unique construction. The purpose of the screening bucket is to separate larger and smaller particles from the soil and not crush the larger material into smaller particles.

Topsoil making for landscaping, nurseries and wholesale is the principal use while some construction contractors utilise the bucket for screening.

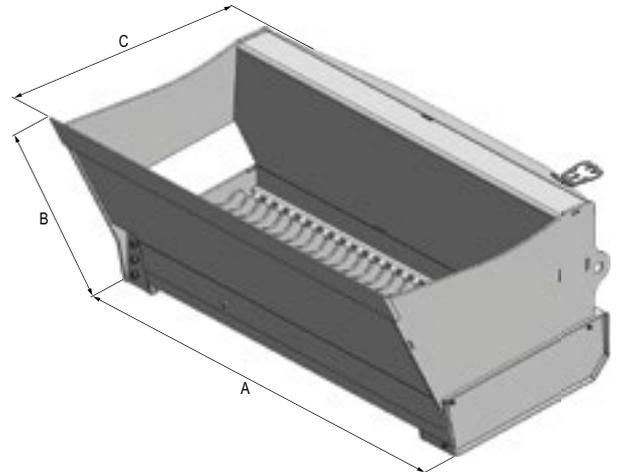

Dimensions (mm/in)		
A	B	C
1200 / 47.2	720 / 28.3	620 / 24.4

Model	Max Load*	Width (A)	Screened materials Ø	Weight	Code	Price
Screening bucket	280 kg (617 lbs)	120 cm (47.2 in)	0/20-0/35 mm (0/0.8 - 0/1.4in)	320 kg (705 lbs)	C890030	13,000.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.3 MK-MZ	S520 4.2	S525	5.2 5.3	5.3 7.2	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
	Very compatible				Compatible				Not compatible						

(* C890025 adapter required)



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SWEEPER WITH COLLECTOR

<http://tiny.cc/sweeper2>


FEATURES & BENEFITS

- **Powerful sweeper for large areas**

Whether traveling forward or backwards, this attachment quickly and quietly sweeps and collects dirt and debris, and easily dumps out the refuse. Perfect system for cleaning parking lots, sidewalks, loading docks, warehouses, and more. The MultiOne sweeper is equipped with a floating attachment bracket and 4 support wheels that guarantee smooth and easy sweeping operations. The sweeping angle is manually adjusted. Optional: 1) Collection box with manual opening lever. 2) Dust reduction water spray system is made up of a 12V electric pump, 4 spray nozzles, and a 70 L (18.5 gal) water tank. 3) A single 500 mm (20 in) hydraulically driven side brush can be mounted on the right side of the collection box. 4) Collection box opening hydraulic kit.

Model	Diameter	Width	Volume	Weight	Code	Price
Sweeper 100	48 cm (18.9 in)	100 cm (39.4 in)	/	130 kg (286.6 lbs)	C895000	3,041.00 \$
Sweeper 120	48 cm (18.9 in)	120 cm (47.2 in)	/	153 kg (337 lbs)	C890220	3,355.00 \$
Sweeper 150	48 cm (18.9 in)	150 cm (59 in)	/	173 kg (381 lbs)	C890223	4,139.00 \$
Waste box for Sweeper 100	/	100 cm (39.4 in)	70 l (2,5 ft ³)	40 kg (88.2 lbs)	C895001	549.00 \$
Waste box for Sweeper 120	/	120 cm (47.2 in)	90 l (2,5 ft ³)	50 kg (110 lbs)	C890221	627.00 \$
Waste box for Sweeper 150	/	150 cm (59 in)	120 l (5 ft ³)	57 kg (125.6 lbs)	C890224	704.00 \$
Humidification kit for Sweeper 120			70 l (18.5 gal)		C890222	1,883.00 \$
Humidification kit for Sweeper 150			140 l (37 gal)		C890225	2,198.00 \$
Side brush for Sweeper 120 and 150					C890226	1,922.00 \$
Collection box opening hydraulic kit for Sweeper 120 and 150					C890228	740.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 3.525	4.2 5.2	5.2 7.2	6.3	7.3	8.4	9.5 GT850	9.6 GT950	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Sweeper 100	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
Sweeper 120	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
Sweeper 150	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(*) C890025 adapter required

Very compatible

Compatible

Not compatible

ROTARY SWEEPER

<http://tiny.cc/rotarybroom>



FEATURES & BENEFITS

- Hydraulic controlled angle adjustment
- Long lasting bristle material
- Both for snow removal and leaves

Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farm yards or warehouses, you can rely on the rotary broom to get the job done right.



Model	Brush diameter	Brush material	Brush Width	Brush Width at Max Angle	Slewing Angle	Weight	Code	Price
130	60 cm (23.6 in)	nylon	130 cm (51.2 in)	113 cm (44.5 in)	±30°	160 kg (353 lbs)	C890241	4,089.00 \$
160	60 cm (23.6 in)	nylon	160 cm (63 in)	139 cm (54.7 in)	±30°	190 kg (419 lbs)	C890242	4,332.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
130															
160															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

LEAF VACUUM

<http://tiny.cc/leafvacuum>


FEATURES & BENEFITS

- **Powerful vacuum**
- **Rotary side brush**
- **5 m (16 ft) hand hose for difficult to reach areas**

This attachment creates tremendous suction for collecting leaves, grass clippings, and other loose debris. The rotary side brush extends the cleaning area.

The option hand held hose allows you to clean tight work areas, flower beds, along fences, and many other hard-to-reach locations.

The leaf vacuum is equipped with a hydraulically opening door for easy disposal of the collected debris.



Model	Hose Ø	Hose length	Width	Volume	Suction capacity	Weight	Code	Price
Leaf vacuum	/	/	100 cm (39,4 in)	300 l (10,6 ft ³)	50 m ³ /min (1,8 ft ³ /min)	155 kg (342 lbs)	C890239	6,055.00 \$
Hose	180 mm (7 in)	5 m (16 ft)	/	/	/	/	C890245	416.00 \$
Side brush 48 cm (18,9 in) nylon	/	/	/	/	/	/	/	included

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*	
				Very compatible			Compatible			Not compatible						

(*) C890025 adapter required

WEED BRUSH

<http://tiny.cc/weedbrush>



FEATURES & BENEFITS

- Brush with steel bristles
- Powerful hydraulic motor
- Fully adjustable

A hydrostatic drive motor, adjustable tilt, and a specially designed brush are combined to create an effective system to remove weed and plant growth for pavement joints.

The brush angle adjustment allows easy cleaning along walkway edges or along and in wall areas.

The weed brush is an effective tool for cleaning walkways, bike paths, car parks, school yards, general sweeping and even frozen ice and snow, making this a very flexible addition to your maintenance fleet.



Model	Brush diameter	Weight	Code	Price
Weed brush	58 cm (22.8 in)	95 kg (209 lbs)	C890270	4,842.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT950	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
					Very compatible				Compatible				Not compatible		

(*) C890025 adapter required



SNOW BLADE

<http://tiny.cc/snowblade>



FEATURES & BENEFITS

- Efficient on larger areas, but compact enough to clear smaller spaces
- With spring shock absorber

An excellent tool to quickly clear light or moderate snow from sidewalks and driveways.

Equipped with shock absorbing system that allow the blade to trip forward when an obstacle is encountered, saving wear and tear on the blade and MultiOne.

30° hydraulically controlled tilt.



Model	Width	Blade height	Slewing angle	Blade Width at Max Angle	Weight	Code	Price
140	140 cm (55 in)	53 cm (20.8 in)	±30°	121 cm (47.6 in)	121 kg (267 lbs)	C890476	3,128.00 \$
180	180 cm (71 in)	58 cm (22.8 in)	±30°	156 cm (61.4 in)	156 kg (344 lbs)	C890475	3,355.00 \$
210	210 cm (82.7 in)	70 cm (27.6 in)	±30°	182 cm (71.6 in)	191 kg (421 lbs)	C891305	3,610.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-M2	3.520 S520	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1800	9.6 G1900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
140	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
180	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
210	Red	Red	Yellow	Yellow	Yellow	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SNOW PLOW

<http://tiny.cc/snowplow1>



FEATURES & BENEFITS


- Rugged professional grade snow plow
- 5 configurations

This versatile, hydraulically operated snow plow offers 5 different blade operating positions:


- 30° right
- 30° left
- Straight
- Scoop
- V-plow

The plow controls features on-the-go fingertip adjustments to plow through the deepest snow.

Equipped with shock absorbing springs that allow the blade to trip forward when an obstacle is encountered, saving wear and tear on the blade and MultiOne.

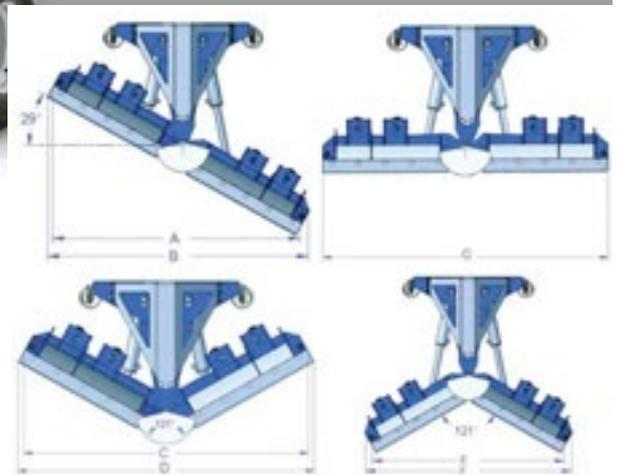

Model	A (mm/in)	B (mm/in)	C (mm/in)	D (mm/in)	E (mm/in)	F (mm/in)	G (mm/in)
120-126	1105 / 43.5	1195 / 47	1210 / 47.6	1260 / 49.6	1000 / 39.4	1130 / 44.5	1270 / 50
150-170	1465 / 57.7	1545 / 60.8	1550 / 61	1610 / 63.4	1380 / 54.3	1480 / 58.3	1685 / 66.3
200-230	1980 / 78	2065 / 81.3	2065 / 81.3	2125 / 83.7	1900 / 74.8	2000 / 78.7	2285 / 90

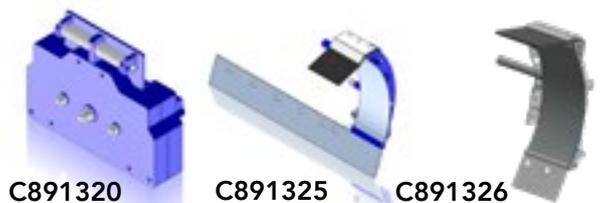

Model	Blades Width	Blades height	Slewing angle	Weight	Code	Price
120-126	120-126 cm (47.2-49.6 in)	29.5 in (75 cm)	±30°	320 kg (705 lbs)	C891301	5,724.00 \$
150-170	150-170 cm (59-67 in)	29.5 in (75 cm)	±30°	350 kg (772 lbs)	C891300	6,013.00 \$
200-230	200-230 cm (78.7-90.5 in)	29.5 in (75 cm)	±30°	420 kg (926 lbs)	C891310	6,369.00 \$
Accessories					Code	Price
Floating Adapter for Snow Plow					C891320	2,019.00 \$
Extension Wings (20 cm / 7.9 in +20 cm / 7.9 in) only for C891310					C891325	954.00 \$
Extension Wings 25+25 cm (9.8+9.8 in) only for C891301					C891326	954.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT800	9.6 GT900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
120-126	Not compatible	Not compatible	Compatible	Compatible	Compatible										
150-170	Not compatible	Not compatible	Compatible	Compatible	Compatible										
200-230	Not compatible	Not compatible	Compatible	Compatible	Compatible										

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

V-BLADE SNOW PLOW - PL SERIES



FEATURES & BENEFITS

A multi-function blade for removal of snow from walks, driveways, or parking lots. Five position adjustable blade adds versatility for your snow removal needs and allows you to get the job done fast!

- Adjustable blade allows for the following positions:
 - Straight, V, Scoop, Angles up to 30° in both directions
- Reversible cutting edge designed with spring loaded trip mechanism.
- Blade floats 5° and tilts 5° for ground contour.
- Adjustable skid shoes.
- Optional polyurethane cutting edge.



Model	Width (Straight)	Cutting Width at Full "V"	Cutting Width at Full "Scoop"	Cutting Width at Max Angle (30°)	Blades height	Slewing angle	Weight	Code	Price
50/47	122 cm (48 in)	116 cm (45.5 in)	95 cm (37.5 in)	105 cm (41.5 in)	83 cm (32.5 in)	±30°	377 kg (830 lbs)	PD891301	5,790.00 \$
60/56	152 cm (60 in)	142 cm (56 in)	122 cm (48 in)	132 cm (52 in)	83 cm (32.5 in)	±30°	393 kg (865 lbs)	PD891302	5,938.00 \$

Accessories

	Code	Price
Polyurethane cutting edge for v-blade snow plows 50/47	PD891301P	535.00 \$
Steel cutting edge for v-blade snow plows 50/47	PD891301S	269.00 \$
Polyurethane cutting edge for v-blade snow plows 60/56	PD891302P	580.00 \$
Steel cutting edge for v-blade snow plows 60/56	PD891302S	286.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S025	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
50/47	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
60/56	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SNOW BLOWER

<http://tiny.cc/snowblower>



FEATURES & BENEFITS

- **Efficient two-stage snow blowers**
- **Heavy duty frame and transmission with replaceable cutting edge**

The snow blower is an efficient method to remove large amounts of snow from sidewalks, roads, or other large areas when snow needs to be spread out evenly. The two-stage blower provides a powerful and efficient snow removal tool, even if the snow is wet and heavy. To achieve this efficiency, the auger breaks up the snow and the fan throws the snow out of the discharge chute. The chute can be rotated 200° from the operator's seat, with the discharge chute height angle manually adjusted.



Model	Width	Rotation	Weight	Code	Price
100	100 cm (39.4 in)	200°	70 kg (154 lbs)	C890453	5,620.00 \$
120	120 cm (47.2 in)	200°	145 kg (320 lbs)	C890454	5,928.00 \$
130 HD (Heavy Duty)	130 cm (51.2 in)	200°	150 kg (331 lbs)	C890472	8,011.00 \$
140	140 cm (55.1 in)	200°	220 kg (485 lbs)	C890455	7,904.00 \$
160 HD (Heavy Duty)	160 cm (63.0 in)	200°	250 kg (551 lbs)	C890460	9,152.00 \$
180 HD (Heavy Duty)	180 cm (70.9 in)	200°	280 kg (618 lbs)	C890466	9,776.00 \$

Compatibility	1-1 M14	2-2 MK-MZ	3-3 SS20 SS25	4-4 5-2	5-5 7-2	6-3	7-3	8-4	9-5 GT180	9-6 GT180	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
Model															
100	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
120	Red	Yellow	Red	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Red
130 HD	Red	Red	Red	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
140	Red	Red	Yellow	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
160 HD	Red	Red	Red	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
180 HD	Red	Red	Red	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(*) C890025 adapter required

Very compatible Compatible Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SALT AND SAND SPREADER

<http://tiny.cc/saltspreader>



FEATURES & BENEFITS

- Fast and reliable attachment
- Rubber cover included
- 180° spread angle
- Available as either an attachment plate mount or as a towed unit.
- Multi sector limiter available for more precise spreading
- The attachment plate mounted unit has a hydraulically powered spinner
- The tow behind units spinner plate is powered by an axle mounted planetary gear

This unit is an ideal winter time tool to spread ice control products on parking lots and pedestrian areas. Can also be used in the warmer months to spread seed and fertilizer. The discharge pattern is easily adjusted with a lever adjusted professional style multi-sector limiter.



Model	Volume*	Max load	Max Spreading Width Granular	Max Spreading Width Crystalline	Weight	Code	Price
Towed centrifugal	200 l (7 ft ³)	200 kg (441 lbs)	12 – 14 m (39 – 46 ft)	6 – 7 m (20 – 23 ft)	80 kg (176 lbs)	C890186	2,420.00 \$
Centrifugal stainless steel	200 l (7 ft ³)	200 kg (441 lbs)	12 – 14 m (39 – 46 ft)	6 – 7 m (20 – 23 ft)	54 kg (119 lbs)	C890185	3,766.00 \$

(*) verify the lifting capacity of the machine

Accessories		Code	Price
Multi sector limiter		C890187	572.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S025	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1900	9.6 G1900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Towed centrifugal															
Centrifugal stainless steel															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TRAILER

<http://tiny.cc/trailerrimorchio>



FEATURES & BENEFITS

MultiOne trailers are useful for transporting garden waste, top soil, mulch, etc. Equipped with pintle a style hitch and parking brake. Available with either manual or hydraulic dump system.

- **MANUAL DUMP VERSION** Agricultural trailer with the manual dump system. Rear gate can be opened. Available in one size.
- **HYDRAULIC DUMP VERSION** Heavy duty trailer equipped with a hydraulic dump system powered by the MultiOne. Side and rear gates can be opened. Available in two sizes.



Model	Max Load	Length	Width	Sides Height	Tipping	Wheels	Weight	Code	Price
600	450 kg (992 lbs)	150 cm (59 in)	115 cm (45.3 in)	35 cm (13.8 in)	manual	16-6.50-8	150 kg (330 lbs)	C890770	2,643.00 \$
1200	870 kg (1918 lbs)	200 cm (78.7 in)	140 cm (55.2 in)	35 cm (13.8 in)	hydraulic	185/70 R13	330 kg (728 lbs)	C890775	4,294.00 \$
1500	980 kg (2160 lbs)	220 cm (86.6 in)	150 cm (59 in)	35 cm (13.8 in)	hydraulic	205/70 R15	520 kg (1146 lbs)	C890776	5,126.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S525	4.2 S2	5.2 L2	6.3	7.3	8.4	9.5 GT850	9.6 GT950	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
600															
1200															
1500															

(*) C890025 adapter required



STAKE INSTALLER

<http://tiny.cc/stakeplanter>



FEATURES & BENEFITS

- Efficient and time saving
- Powerful attachment

The stake installer attachment lets you your Multione mini loader to rapidly drive stakes into the ground with minimal ground preparation. The specially designed tool holds a fence stake while a hydraulically powered vibratory hammer pounds the stake into the ground. The MultiOne boom enables the efficient handling of long stakes.



Model	Impact energy	Impact rate	Weight	Code	Price
Stake Installer	140 J	1000/1250 bpm	120 kg (265 lbs)	C890780	7,852.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*	

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

AERIAL WORK PLATFORM

<http://tiny.cc/liftingplatform>



FEATURES & BENEFITS

- MultiOne carries the platform anywhere
- Independent from external power source
- Quick and versatile

The MultiOne aerial work platform is attached to the MultiOne by the coupling plate. The safe working load for the aerial work platform is 120 kg (265 lbs), which makes it ideal for one man and plenty of tools. This platform is a cost effective system that enables reaching working heights up to 8 – 10 m (26 – 33 ft). This portable platform is suitable for building repairs, painting, light bulb replacement, general maintenance, and more.



Model	Platform height	Capacity	Basket size	Working height	Total dimensions	Weight	Code	Price
PID 8,5	6,5 m (21,3 ft)	120 kg (265 lbs)	65x65 cm (25.6x25.6 in)	8,4 m (27.5 ft)	130x70 cm (51.2x27.5 in)	345 kg (760 lbs)	C895150	13,038.00 \$
PID 10	7,8 m (25,6 ft)	120 kg (265 lbs)	65x65 cm (25.6x25.6 in)	9,8 m (32 ft)	130x70 cm (51.2x27.5 in)	350 kg (772 lbs)	C895151	14,704.00 \$

Compatibility	1,1 M14	2,2-2,3 MK-MZ	3,320 S325	4,2 5,2	5,32 7,2	6,3	7,3	8,4	9,5 G1980	9,6 G1980	10	6,3SD	7,3SD 8,4SD	9,5SD	12,4*
Lifting platform															
PID 8,5															
PID 10															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

STREET WASHER

<http://tiny.cc/streetwasher>



FEATURES & BENEFITS

- High water pressure
- The spray bars can be tilted up at 90° for side wall cleaning
- Includes a hand spray wand with 10 m (32 ft) hose on a storage reel
- High capacity tank

MultiOne Street Washer is the best solution for quickly cleaning public roads, town centers, car parks, market squares, large industrial areas, resort walkways, and wherever hygiene is required.



Model	Spray Bar Width	Tank Capacity*	Water pressure	Nozzles	Pipe Length	Weight	Code	Price
300	150 cm (59 in)	300 l (79.2 gal)	150 bar	3	/	60 kg (132 lbs)	C890750	4,709.00 \$
600	250 cm (98.4 in)	600 l (158.5 gal)	150 bar	5	/	75 kg (165 lbs)	C890751	6,323.00 \$
Hand spray wand (included)					10 m (32.8 ft)	/	/	/

(*) verify the lifting capacity of the machine

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S025	4.2 5.2	5.35 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Street Washer															
300	Very compatible	Compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible
600	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible


(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

DEBRIS AND LEAF BLOWER

<http://tiny.cc/debrisblower>



FEATURES & BENEFITS

- 360 degree 12V nozzle rotation from operators position
- Nozzle options for specific applications
- Heavy-duty frame construction

The debris and leaf blower provides great air volume flow and the capability to rotate the nozzle 360 degrees from the operator's seat.

This blower delivers superior productivity and greater efficiency in jobs ranging from cleaning sidewalks, streets, car parking and other maintained paved areas, to blowing grass clippings, leaves, snow, sand or other debris off fairways or greens.



Model	Min - Max Flow Rate	Dimensions with Nozzle (LxWxH)	Weight	Code	Price
Debris and leaf blower	49 - 94.6 l/min (13 - 25 GPM)	163 x 117 x 82 cm (64 x 46 x 32 in)	136 kg (300 lbs)	C892000	11,440.00 \$
Options					
1	90° polymer nozzle			C892001	512.00 \$
2	Long rectangular nozzle end			C892002	512.00 \$
3	Short rectangular nozzle end			C892003	512.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT950	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12.4*	
	Very compatible					Compatible					Not compatible					

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

FLAIL MOWER WITH SIDE SHIFT


<http://tiny.cc/flailmowerside>



FEATURES & BENEFITS

- Hydraulic side shift and angle control flail mower
- Powerful attachment

Use this hydraulically powered flail mower with side shift for heavy shrubs and weeds, and see what it can do! Not only is its heavy duty construction, combined with the power and stability of the MultiOne, perfect for use on slopes, it's also perfect for mulching in parks and other hard to reach places. Features: 1) Standard in-line front flail mower. 2) Offset length (174 cm / 68.5 in). 3) To -45° angle ditch mower. 4) To +90° angle bank and hedge mower.

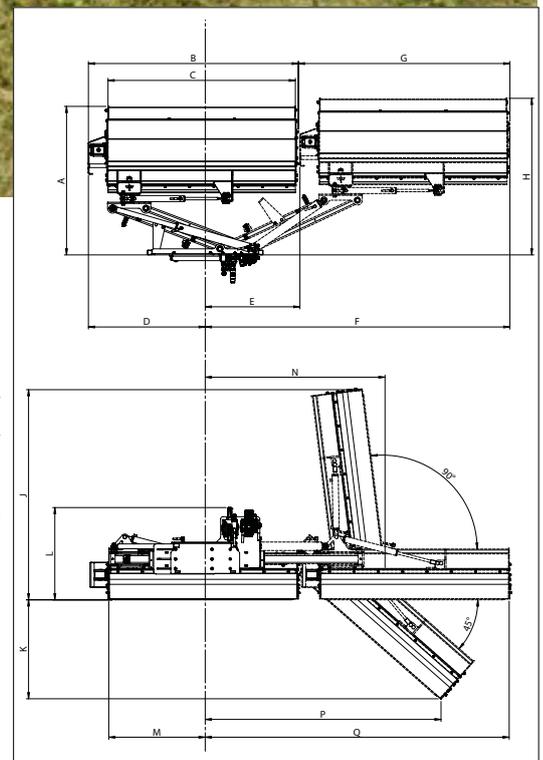

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
110	1230 mm (48.4 in)	1276 mm (50.2 in)	1090 mm (42.9 in)	960 mm (37.8 in)	778 mm (30.6 in)	2054 mm (80.9 in)	1738 mm (68.4 in)	1297 mm (51 in)	1294 mm (51 in)	526 mm (20.7 in)	764 mm (30 in)	792 mm (31.2 in)	1477 mm (58.1 in)	1592 mm (62.7 in)	2148 mm (84.6 in)
125	1230 mm (48.4 in)	1426 mm (56.1 in)	1240 mm (48.8 in)	960 mm (37.8 in)	778 mm (30.6 in)	2204 mm (86.8 in)	1738 mm (68.4 in)	1297 mm (51 in)	1443 mm (56.8 in)	626 mm (24.6 in)	764 mm (30 in)	792 mm (31.2 in)	1477 mm (58.1 in)	1704 mm (67.1 in)	2298 mm (90.5 in)
Model	Cutting Width		Blades	Rotation Angle		Max Side Shift		Weight		Code		Price			
110	110 cm (43.3 in)		30 pcs	+90° / - 45°		174 cm (68.5 in)		277 kg (610 lbs)		C890596		7,669.00 \$			
125	125 cm (49.2 in)		36 pcs	+90° / - 45°		174 cm (68.5 in)		300 kg (662 lbs)		C890597		8,072.00 \$			

Compatibility	1.1 M14	2.2-2.3 MK-MZ	S520 4.2	S525 5.2	S532 7.2	6.3	7.3	8.4	9.5 G1950	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
110															
125															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

FLAIL MOWER


<http://tiny.cc/flailmower1>



FEATURES & BENEFITS

- Great cutting power
- Works efficiently on tall grass
- Multiflaot® floating system

A versatile and compact machine designed to efficiently cut long grass and small scrub plants. A wide choice of cutting tools makes this unit suitable for fine grass cutting, as well as more heavy duty applications. This mower capitalizes on MultiOne's best in class hydraulic power to deliver top performance.

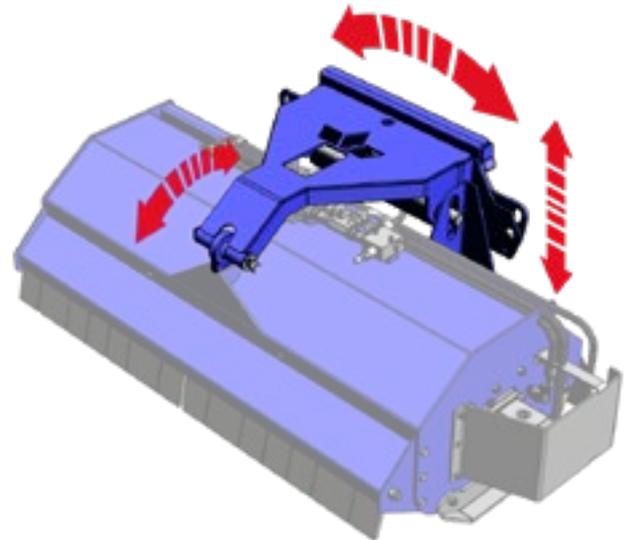

Model	Width	Cutting Height	Blades	Weight	Code	Price
110	110 cm (43.3 in)	2-10 cm (0.8-4 in)	30 pcs	122 kg (269 lbs)	C890590	4,046.00 \$
125	125 cm (49.2 in)	2-10 cm (0.8-4 in)	36 pcs	145 kg (320 lbs)	C890591	4,382.00 \$
155	155 cm (61 in)	2-10 cm (0.8-4 in)	42 pcs	162 kg (357 lbs)	C890592	5,408.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 3.525	4.2 5.2	5.2 5.7	6.3	7.3	8.4	9.5 GT850	9.6 GT900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
110	Not compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
125	Not compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
155	Not compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SIDE BOOM WITH FLAIL MOWER DZ1


<http://tiny.cc/sideflailmower>



FEATURES & BENEFITS

- Excellent visibility of to the whole working area
- Compact with long reach capabilities

The side flail mower, combined with the power and stability of the MultiOne, makes it possible to reach places it is not safe to drive. This makes mowing side slopes, ditches, waterfronts, and other hard to reach areas safe and easy. Mowing road sides with the combination of a MultiOne and this mower is easier and more efficient than with larger machines.

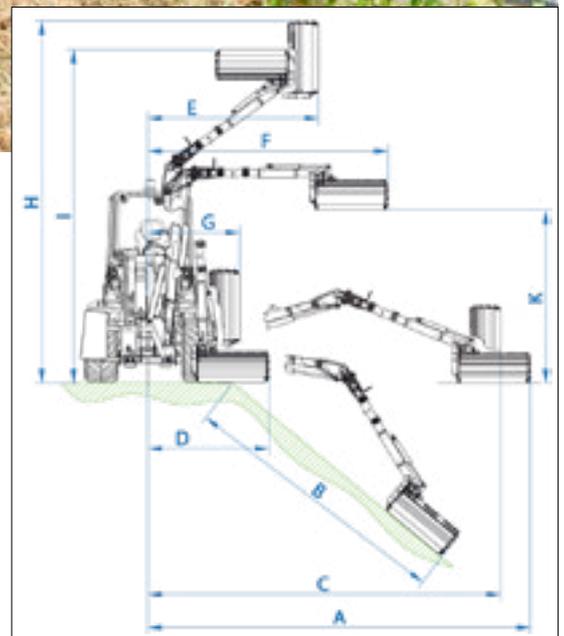

Model	A	B	C	D	E	F	G	H	I	K
Flail mower 60	280 cm (110 in)	170 cm (67 in)	260 cm (102 in)	145 cm (57 in)	130 cm (51 in)	175 cm (69 in)	180 cm (71 in)	300 cm (118 in)	280 cm (110 in)	155 cm (61 in)
Flail mower 80	300 cm (118 in)	190 cm (75 in)	260 cm (102 in)	165 cm (65 in)	130 cm (51 in)	195 cm (77 in)	180 cm (71 in)	320 cm (126 in)	280 cm (110 in)	155 cm (61 in)

Boom Mower	Max. Extension	Width	Weight	Code	Price
Boom mower DZ1 (*)	3 m (9.8 ft)		292 kg (644 lbs)	C890607	8,013.00 \$
Flail mower 60 for boom		60 cm (23.6 in)	80 kg (176 lbs)	C890606	3,363.00 \$
Flail mower 80 for boom		80 cm (31.5 in)	105 kg (232 lbs)	C890601	3,661.00 \$

(*) C890601 or C890606 required

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Boom + 60 Flail mower															
Boom + 80 Flail mower															


(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SIDE BOOM WITH FLAIL MOWER DZ2

<http://tiny.cc/sideflailmower>

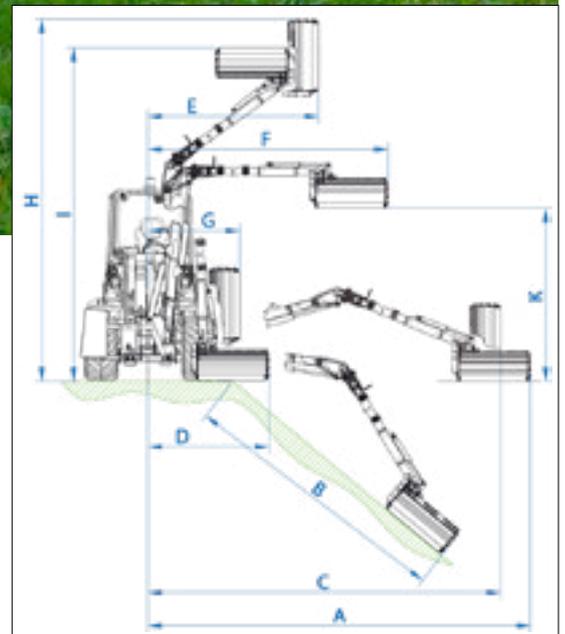

FEATURES & BENEFITS

- Excellent visibility of to the whole working area
- Compact with long reach capabilities

MultiOne's side flail mower lets you reach the cutting head into waterfronts, ditches, steep slopes, and other hard to reach areas safely. This mower uses a two-piece attachment system, using a sideways boom that can carry one of two mowing attachments. This lets you choose between a flail mower for tough brush or a traditional lawn mower for a better finish on shorter grass.

Model	A	B	C	D	E	F	G	H	I	K
Flail mower 80	315 cm (124 in)	190 cm (74.8 in)	265 cm (104.3 in)	185 cm (72.8 in)	155 cm (61 in)	215 cm (84.6 in)	135 cm (53.1 in)	375 cm (147.6 in)	325 cm (128 in)	135 cm (53.1 in)
Flail mower 100	335 cm (132 in)	210 cm (82.7 in)	265 cm (104.3 in)	205 cm (80.7 in)	155 cm (61 in)	235 cm (92.5 in)	135 cm (53.1 in)	395 cm (155.5 in)	325 cm (128 in)	135 cm (53.1 in)

Boom Mower	Extension	Width	Weight	Code	Price
Boom mower DZ2 (*)	3,5 m (11.5 ft)		486 kg (1072 lbs)	C890600	9,158.00 \$
Flail mower 80 for boom		80 cm (31.5 in)	105 kg (232 lbs)	C890601	3,661.00 \$
Flail mower 100 for boom		100 cm (39.4 in)	155 kg (342 lbs)	C890602	4,133.00 \$
Lawn mower 120 for boom		120 cm (47.2 in)	100 kg (221 lbs)	C890604	4,036.00 \$

(*) C890601, C890604 or C890602 required

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.20 S520	4.2 S2	5.2 L7-L	6.3	7.3	8.4	9.5 GT800	9.6 GT900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Boom + 80 Flail mower															
Boom + 100 Flail mower															
Boom + 120 Lawn mower															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

LAWN MOWER

<http://tiny.cc/lawnmower2>



FEATURES & BENEFITS

- Mulching kit available
- Equipped with safety stop valve

Ideal for fine cut applications, such as golf courses and large acreage mowing. The mower has been designed with three blades that cut with an overlap that prevents uncut strips. MultiOne's extensive design experience makes the mower very reliable and assures a high quality cut. The independent 4 wheel support of the mower frame allows the mower deck to follow ground contours.



Model	Width	Cutting Height	Weight	Code	Price
Lawn mower 100 with mulching system	100 cm (39.4 in)	1-12 cm (0.4 – 5 in)	116 kg (256 lbs)	C895080	2,643.00 \$
Lawn mower 130 with rear discharge	130 cm (51.2 in)	1-12 cm (0.4 – 5 in)	170 kg (375 lbs)	C890630	3,604.00 \$
Lawn mower 150 with side discharge	150 cm (59 in)	1-12 cm (0.4 – 5 in)	207 kg (457 lbs)	C890632	4,803.00 \$
Lawn mower 180 with side discharge	180 cm (70.8 in)	1-12 cm (0.4 – 5 in)	240 kg (529 lbs)	C890634	5,751.00 \$
Options					
Mulching kit for lawn mower 130			20 kg (44 lbs)	C890631	478.00 \$
Mulching kit for lawn mower 150			21 kg (47 lbs)	C890633	538.00 \$
Mulching kit for lawn mower 180			25 kg (55 lbs)	C890635	593.00 \$

Compatibility	11 M14	22-23 MK-MZ	5520 5525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Lawn mower 100	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
Lawn mower 130	Red	Yellow	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Green	Green	Green
Lawn mower 150	Red	Red	Red	Red	Yellow	Yellow	Yellow	Green	Green	Green	Green	Red	Yellow	Green	Yellow
Lawn mower 180	Red	Red	Red	Red	Red	Red	Green	Green	Green	Green	Green	Red	Yellow	Green	Red

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TORNADO LAWN MOWER

<http://tiny.cc/tornadolawnmower2>



FEATURES & BENEFITS

- Powerful lawn mower with internal clipping catcher
- Can also be used to collect tree leaves on lawns
- No-turbine technology, quiet and dustless

Designed for professional level green space maintenance, the MultiOne Tornado mower with the internal clipping catcher effectively cuts dry and wet grass. Using the patented MultiOne Tornado, in a single pass you can cut, pick-up, and collect the clippings in the internal catcher with no noise or dust. The catcher can be easily unloaded directly into a trailer.



Model	Width	Volume*	Cutting height	Blades	Weight	Code	Price
Tornado 120	120 cm (47.2 in)	250 l (8.8 ft ³)	1-12 cm (0.4 – 5 in)	3	210 kg (463 lbs)	C890643	6,498.00 \$
Tornado 150	150 cm (59 in)	250 l (8.8 ft ³)	1-12 cm (0.4 – 5 in)	3	253 kg (558 lbs)	C890644	7,210.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Tornado 120	Red	Red	Yellow	Yellow	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Green	Green
Tornado 150	Red	Red	Red	Red	Yellow	Yellow	Green	Green	Green	Green	Green	Red	Yellow	Green	Yellow

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SICKLE BAR MOWER

<http://tiny.cc/sicklebarmower1>



FEATURES & BENEFITS

- Compact dimensions
- Fast

The MultiOne hydraulically powered sickle bar mower has been designed to quickly and effectively cut long grasses and hay on fields, meadows, and road banks. The dual sickle bar mower is ideal for cutting these grasses which can be harvested in a secondary process.



Model	Width	Code	Price
145	145 cm (57 in)	C890653	5,247.00 \$
165	165 cm (65 in)	C890654	5,516.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S0525	4.2 5.2	5.35 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
145	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible
165	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible


(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SPIKE AERATOR

<http://tiny.cc/spikeaerator>



FEATURES & BENEFITS

- Quick and efficient operation
- Suitable for sandy or loamy soils

The spike aerator cuts and penetrates the ground surface using the wedge shaped spikes. The cut slots enable air, fertilizer, and water to effectively reach the lawn roots in sandy or loamy soils. The open slots quickly close after water causes the compacted soil to expand.

Spike penetration depth is easily controlled using the two guide rollers, providing consistent results.



Model	Working Width	Weight	Code	Price
Spike Aerator	130 cm (51.2 in)	300 kg (662 lbs)	C890446	4,709.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*	

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

CORE AERATOR

<http://tiny.cc/coreaerator>



FEATURES & BENEFITS

- Holes stay open for a long time
- Suitable for heavy clay soils

The core aerator penetrates the ground pulling plugs of grass and soil from the ground, leaving the plugs behind. The holes created enable air, fertilizer, and water to effectively reach the lawn roots in heavy clay soils.

Core aerator penetration depth is easily controlled using the two guide rollers, providing consistent results.



Model	Working Width	Weight	Code	Price
Core Aerator	130 cm (51.2 in)	300 kg (662 lbs)	C890445	4,709.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*

(*) C890025 adapter required



Very compatible
 Compatible
 Not compatible

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

HEDGE CUTTER


<http://tiny.cc/hedgecutter>



FEATURES & BENEFITS

- Cut angle electrically adjustable
- Time saving attachment
- Very high cutting quality
- Cutting bar is suitable for cutting fine leaves, as well as heavy growth

The hedge cutter is the perfect attachment for hedge cutting, and more. The combination of the cutters arm angle adjustment and the MultiOne's boom reach provides excellent reach. Through using the speed and flexibility of the MultiOne, cutting straight hedge profiles is quick and easy.

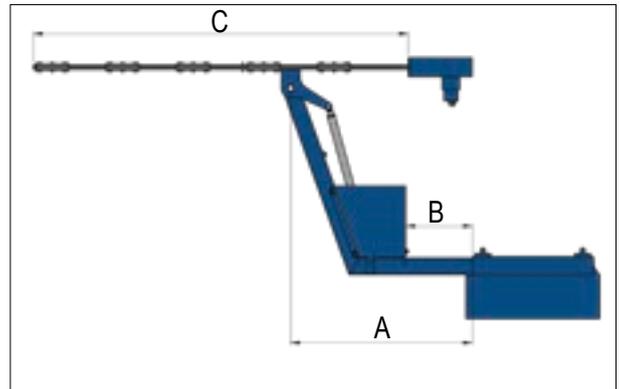

Mod.	Dimensions (mm/in)			
	A (min)	A (max)	B (max)	C
10 - 160	350 / 13.8	800 / 31.5	450 / 17.7	1600 / 63
10 - 210	350 / 13.8	800 / 31.5	450 / 17.7	2100 / 83
30 - 160	350 / 13.8	800 / 31.5	450 / 17.7	1600 / 63

Model	Hedge cutter length	Max. cutting diameter	Slewing angle	Weight	Code	Price
Frame only (C890666, C890667, C890668 required)	/	/	/	45 kg (100 lbs)	C890665	2,289.00 \$
Hedge cutter 10 - 160 (C890665 required)	160 cm (63 in)	1 cm (0.4 in)	120°	63 kg (139 lbs)	C890666	2,156.00 \$
Hedge cutter 10 - 210 (C890665 required)	210 cm (83 in)	1 cm (0.4 in)	120°	103 kg (227 lbs)	C890668	3,434.00 \$
Hedge cutter 30 - 160 (C890665 required)	160 cm (63 in)	3 cm (1.2 in)	120°	115 kg (253 lbs)	C890667	2,862.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S520	4.2 5.2	5.2 7.2	6.3	7.3	8.4	9.5 GT800	9.6 GT900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
Hedge cutter 10 - 160															
Hedge cutter 10 - 210															
Hedge cutter 30 - 160															

(*) C890025 adapter required

Very compatible
 Compatible
 Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

DUAL BLADE HEDGE TRIMMER


<http://tiny.cc/Vineyardtrimmer>



FEATURES & BENEFITS

- Dual cutting action saves time
- Completely adjustable
- Easy to control

The hydraulically powered dual blade hedge trimmer allows the top and sides of large plants to be cut simultaneously. Each frame and cutter assembly is independently adjustable, and the MultiOne's boom provides additional flexibility and control.

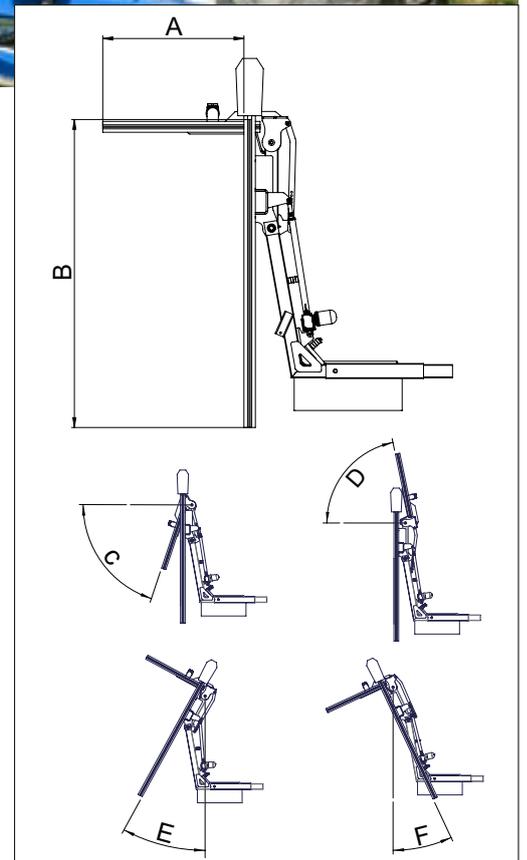

Dimensions (mm/in)					
A	B	C	D	E	F
740 / 29	1600 / 63	71°	78°	28°	25°

Model	Vertical Bar Length	Horizontal Bar Length	Max Right Side Shift	Max. cutting diameter	Weight	Code	Price
Double Blade Hedge Trimmer	160 cm (63 in)	74 cm (29,1 in)	40 cm (15.7 in)	1 cm (0.4 in)	160 kg (353 lbs)	C890441	6,727.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*

(*) C890025 adapter required



Very compatible
 Compatible
 Not compatible

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

SHOOT REMOVER

<http://tiny.cc/shootremover>




FEATURES & BENEFITS

- Low wear cutter string
- Variable offset
- Efficient and reliable

The MultiOne shoot remover is an ideal tool for the removal of weeds and plant shoots from around trees. Hydraulically powered, it gently removes the shoots without causing tree trunk damage.

The shoot remover frame can be offset to the right to allow for variable working conditions. Replacement of the long lasting rubber strings is quick and easy.

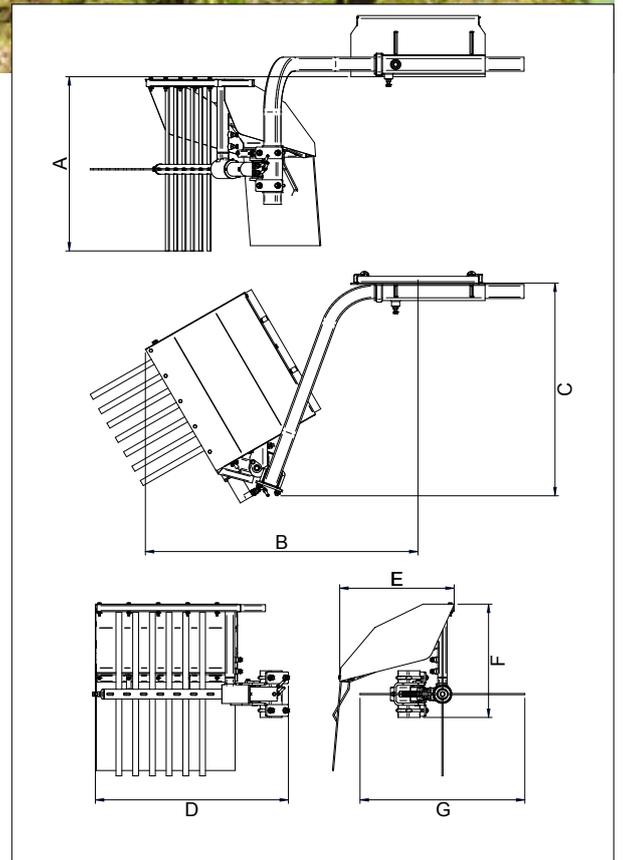

Dimensions (mm/in)						
A	B	C	D	E	F	G
746 / 29.4	1160 / 45.7	910 / 35.8	820 / 32.3	490 / 19.3	490 / 19.3	700 / 27.6

Model	Rotor Length	Offset Max	Weight	Code	Price
Shoot Remover	82 cm (32.3 in)	25 cm (9.8 in)	50 kg (110 lbs)	C890436	3,766.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

INTER-ROW MOWER


<http://tiny.cc/interrow>



FEATURES & BENEFITS

- Abrasion resistant guard
- Floating system
- Automatic extension and return system

The inter-row mower is designed to cut grass and shrubs around trees, guard rails, traffic signs, and other obstacles. The floating mower system allows the mower disk to automatically follow ground contours. This system provides excellent productivity and an even cut.

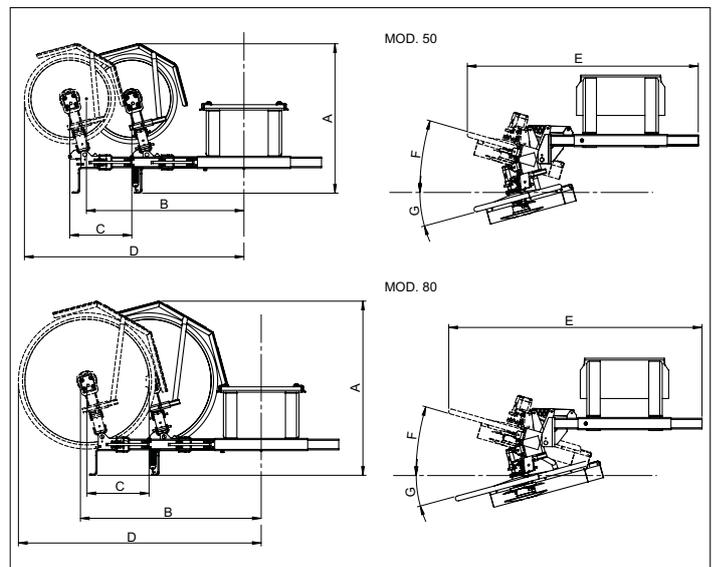

Dimensions (mm/in)							
	A	B	C	D	E	F	G
Mod. 50	971 / 38.2	1016 / 40	400 / 15.7	1416 / 55.7	1489 / 58.6	16°	15°
Mod. 80	1132 / 44.6	1166 / 45.9	400 / 15.7	1566 / 61.6	1633 / 64.3	16°	15°

Model	Mowing disk diameter	Max Side Shift	Nr. Blade	Weight	Code	Price
50	50 cm (19.7 in)	40 cm (15.7 in)	2	108 kg (238 lbs)	C890705	5,248.00 \$
80	80 cm (31.5 in)	40 cm (15.7 in)	2	115 kg (254 lbs)	C890706	5,651.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-1M2	3.5-20 S0525	4.2 5.2	5.3-2 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
50															
80															

(*) C890025 adapter required



STAINLESS STEEL TIPPING DUMPER

<http://tiny.cc/tippingdumper>



FEATURES & BENEFITS

- High capacity
- For fruit and vegetables
- Hydraulic dumping

The MultiOne stainless steel tipping dumper is designed for grape, fruit, and vegetable transportation. Two hydraulic cylinders tip the container for unloading into trucks or boxes. Using the MultiOne's boom, the tipping dumper can reach almost any dumping position.



Model	Max Load*	Width	Weight	Code	Price
Stainless steel Tipping Dumper	400 kg (882 lbs)	120 cm (47,3 in)	180 kg (397 lbs)	C890430	4,709.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1-1 M14	22-23 MK-MZ	3520 3525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 G1950	9-6 G1980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
				Very compatible			Compatible			Not compatible					

(* C890025 adapter required)



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TREE SHAKER WITH COLLECTOR

<http://tiny.cc/treeshaker>


FEATURES & BENEFITS

- Total control of vibration frequency (up to 40 Hz)
- Operates on trees with wide trunk
- Up to 5 m (16.4 ft) diameter umbrella

The tree shaker attachment incorporates the most advanced harvest technology for olives, almonds, nuts, pistachio, etc. The shaker requires a minimum distance of 70 cm (27 in) from the soil to the foliage. The adjustable vibration frequency maximizes the effect on the fruit, avoiding low frequency vibrations on the trunk. Depending on ground conditions, as many as 40 to 60 trees can be processed per hour. The hydraulically controlled collector has a diameter of 5 m (16.4 ft), capturing fruit from large trees. Is equipped with a hydraulically opening door for unloading the product collected directly on trucks or trailers.

The shaker vibrating head is powered by a compact hydraulic motor. The shaker's controls are located near the operator's seat, and controls all movements and vibration frequency.



Model	Trunk diameter	Capacity*	Diameter	Weight	Code	Price
Shaker vibrating head	0-35 cm (0-13.8 in)	/	/	330 kg (727 lbs)	C891000	22,594.00 \$
Collector	/	300 kg (660 lbs)	5 m (16.4 ft)	180 kg (397 lbs)	included	/

(* verify the lifting capacity of the machine)

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*
	Very compatible	Compatible	Compatible	Compatible	Not compatible	Not compatible	Not compatible	Not compatible							

(* C890025 adapter required)

VINEYARD SPRAYER

<http://tiny.cc/vineyardsprayer>



FEATURES & BENEFITS

- High pressure, hydraulically powered pump
- Polyethylene tank
- Clean water tank for hand washing

The Vineyard Sprayer is a versatile sprayer suitable for vineyard spraying, weed-killing in open-field growing, inter-row weed-killing.

NOTE: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals.

Model	Tank Capacity*	Flow output	Max Pressure	Code	Price
Vineyard Sprayer	200 l (52.8 gal)	40 l/min (10.6 GPM)	60 bar (870 psi)	C890741	4,574.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
	Very compatible					Compatible					Not compatible				

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

VINEYARD TOOL CARRIER

<http://tiny.cc/toolcarrier>



FEATURES & BENEFITS

- Multifunction tool
- 6 professional attachments for vineyards
- Suitable for rows from 200 cm (6.5 ft) wide

MultiOne's vineyard tool carrier is a multi-functional tool carrier for a wide range of vineyard attachments. This tool carrier for vineyard is equipped with an electro-hydraulic distributor with 4 functions (roll back / tilt head / side extension / height) operated through a joystick positioned in the operator's cab.



Tool carrier for vineyard	Diameter	Blade length	Weight	Min. Row Width	Code	Price
Vineyard tool carrier (base machine)	/		220 kg (485 lbs)	200 cm (78.74 in)	C890760	10,763.00 \$
1 Blade Weeder (*)	/	50 cm (19.68 in)	/	/	C890763	671.00 \$
2 Plough roots bare blade (*)	/	26 cm (10.23 in)	/	/	C890766	1,991.00 \$
3 Power Harrow unit 3 blades (*)	40 cm (15.74 in)		/	/	C890761	4,036.00 \$
4 Disk roots bare (*)	36 cm (14.17 in)		/	/	C890764	2,946.00 \$
5 Disk roots prop (*)	46 cm (18.11 in)		/	/	C890765	1,682.00 \$
6 Disk Mower, blades and wires (*)	40 cm (15.74 in)		/	/	C890762	4,425.00 \$

(*) C890760 required

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 G1980	9-6 G1980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*	
	Very compatible					Compatible					Not compatible					

(*) C890025 adapter required



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

ROTARY TILLER

<http://tiny.cc/rotarytiller>



FEATURES & BENEFITS

- **Reliable, heavy duty**
- **Hydraulic transmission**

The heavy duty MultiOne rotary tiller is the ideal tool for preparing the soil for seeding or planting, even in tough conditions and hard soils. In one pass, the hydraulically powered tiller breaks up the soil, weeds and scrub growth are uprooted, and the soil is levelled.



Model	Working Width	Working Depth	Weight	Code	Price
100	100 cm (39.4 in)	14 cm (5.5 in)	95 kg (210 lbs)	C890495	3,672.00 \$
135	135 cm (53.1 in)	14 cm (5.5 in)	130 kg (287 lbs)	C890496	4,453.00 \$
150	150 cm (59 in)	14 cm (5.5 in)	160 kg (353 lbs)	C890497	4,768.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S520	4.2 5.2	5.3-2 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
100	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible
135	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
150	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Not compatible	Not compatible	Not compatible	Not compatible

(*) C890025 adapter required

Very compatible Compatible Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

POWER HARROW

<http://tiny.cc/powerharrow>



FEATURES & BENEFITS

- Professional, efficient rotary harrow for topsoil levelling
- Top grade finish with just one pass
- Available with seeding unit

The MultiOne hydraulically powered power harrow is the ideal tool for preparing soil for seeding. In one pass the soil is broken up, weeds and scrub growth are uprooted, and the soil is leveled.

The power harrow can also be equipped with the optional seeding unit, combining soil preparation and seeding in one pass.



Model	Working Width	Working Depth	Weight	Code	Price
110	110 cm (43.3 in)	0 - 15 cm (0 - 5.9 in)	215 kg (474 lbs)	C890498	5,784.00 \$
130	130 cm (51.2 in)	0 - 15 cm (0 - 5.9 in)	242 kg (534 lbs)	C890500	6,054.00 \$
150	150 cm (59 in)	0 - 15 cm (0 - 5.9 in)	269 kg (593 lbs)	C890502	6,727.00 \$
Options					
Seeding unit for power harrow 110				C890499	3,093.00 \$
Seeding unit for power harrow 130				C890501	3,498.00 \$
Seeding unit for power harrow 150				C890503	4,036.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-1M2	3.520 3.525	4.2 5.2	5.2 7.2	6.3	7.3	8.4	9.5 GT800	9.6 GT900	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
110	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
130	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
150	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

POWER RAKE

<http://tiny.cc/powerrake>



FEATURES & BENEFITS

- **Powerful and fast**
- **Effective**

The MultiOne power rake is the ideal tool for preparing the soil for planting.

Operating the power rake with the gauge wheels down puts the machine in the landscaping mode, conditioning and preparing the soil, creating an ideal bed for seeding. Operating the power rake with the gauge wheels up puts the machine in the tilling mode for more aggressive soil preparation.

Since the power rake does not require a lot of power, even the smaller machines work well with this unit.



Model	Width	Weight	Code	Price
135	135 cm (53.1 in)	250 kg (551 lbs)	C890685	5,247.00 \$
155	155 cm (61 in)	290 kg (640 lbs)	C890686	6,054.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 SS25	4.2 5.2	5.3-2 7.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
135															
155															

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

STONE BURIER


<http://tiny.cc/stoneburrier>



FEATURES & BENEFITS

- Top grade finish in just one pass
- Optional seeding unit

The hydraulically powered MultiOne stone burier is the ideal machine to prepare a smooth seed bed in any type of soil even if there are no stones present. In one pass, the stone burier tills the soil, buries stones and other solid items, and tamps the soil. Equip the stone burier with the optional seeding unit combines soil preparation and seeding in one pass.

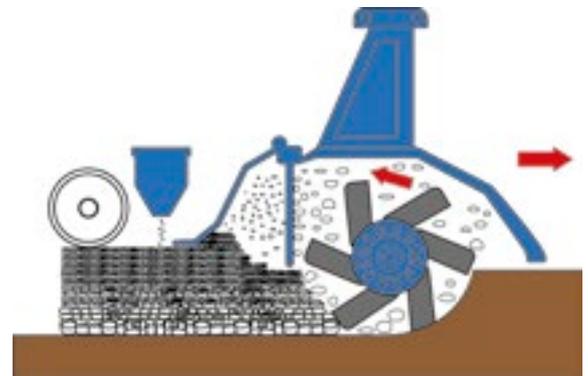

Model	Working Width	Roller Width	Working Depth	Max rock diameter	Weight	Code	Price	
100 w/roller	100 cm (39.4 in)	120 cm (47.2 in)	15 cm (0-6 in)	4 cm (1.6 in)	160 kg (353lbs)	C890504	6,592.00 \$	
120 w/roller	117 cm (49.2 in)	140 cm (55.1 in)	15 cm (0-6 in)	4 cm (1.6 in)	270 kg (595 lbs)	C890506	6,996.00 \$	
135 w/roller	133 cm (52.4 in)	145 cm (57 in)	15 cm (0-6 in)	4 cm (1.6 in)	447 kg (986 lbs)	C890508	7,802.00 \$	
Options								
Seeding unit for stoneburier 100						C890505	2,960.00 \$	
Seeding unit for stoneburier 120						C890507	3,363.00 \$	
Seeding unit for stoneburier 135						C890509	4,036.00 \$	

Compatibility	1.1 M14	2.2-2.3 MK-1M2	3.520 3.525	4.2 5.2	5.2 7.2	6.3	7.3	8.4	9.5 GT850	9.6 GT950	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
100	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible
120	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible
135	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Not compatible

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

RIPPER

<http://tiny.cc/ripper>



FEATURES & BENEFITS

- Simple and efficient
- Rugged construction

The ripper is the perfect tool to break-up hard packed ground, removing roots and buried stones. The ripper tines are 30 cm (12 in) long for deep surface penetration.



Model	Working depth	Width	Weight	Code	Price
Ripper	30 cm (11.8 in)	50 cm (19.7 in)	23 kg (50.7 lbs)	C891220	719.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*	

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

STUMP GRINDER

<http://tiny.cc/stumpgrinder>



FEATURES & BENEFITS

- Excellent visibility of the cutting area
- Cuts large stumps without repositioning

The hydraulically powered stump grinder is a necessary tool for landscaping and forestry work. This unit hydraulically sweeps side to side effectively grinding the stump as deeply under ground as needed.

The stump grinder is safely controlled from the MultiOne's operator's seat. The solid steel cutter wheel and heavy duty teeth assure long lasting cutting performance.



Model	Slewing angle	Weight	Code	Price
Stump Grinder	±40°	107 kg (236 lbs)	C890513	7,346.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S325	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1950	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
				Very compatible			Compatible			Not compatible					

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TREE SPADE

<http://tiny.cc/treetransplanter>




FEATURES & BENEFITS

- Custom diameters available
- Swing-open gate design for easy tree access

Using the MultiOne tree spade, a tree can be dug out, transplanted, or balled for transport quickly and easily.

The overlapping spade blades ensure a clean root cutting, and support the root ball. The tree spade is available in two sizes for different tree diameters.

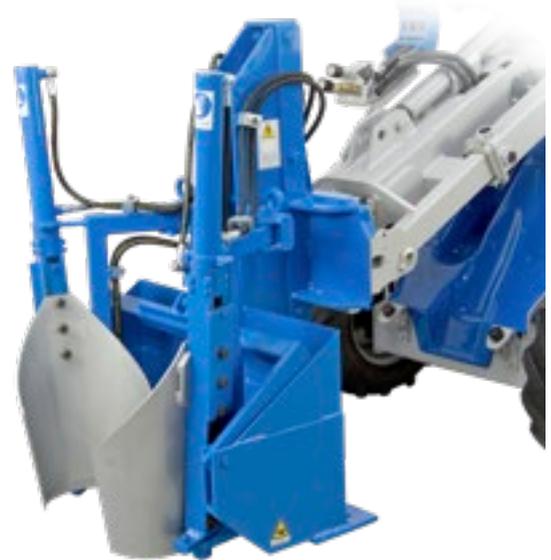

Model	Diameter	Weight	Code	Price
27	27 cm (10.6 in)	300 kg (662 lbs)	C891100	17,275.00 \$
40	40 cm (15.7 in)	550 kg (1212 lbs)	C891101	24,264.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 S325	4.2 5.2	5.35 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
27															
40															

(*) C890025 adapter required

Very compatible
Compatible
Not compatible



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

POWER AUGER FOR TREE PLANTING

<http://tiny.cc/augertree>



FEATURES & BENEFITS

- Specifically designed to trees transplanters

The powerful hydraulic auger is available with two auger bit diameters, specifically designed for tree planting.

The special auger bit creates the hole without compacting the internal hole surface, allowing the tree to easily take root.



Model	Max Torque	Diameter	Weight	Code	Price
Power auger for tree plating, drive unit (C890811 or C890812 required)	400 kgm	/	150 kg (331 lbs)	C890832	5,412.00 \$
Cutting head 80		80 cm (31.5 in)	/	C890811	3,764.00 \$
Cutting head 100		100 cm (39.4 in)	/	C890812	3,883.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*

(*) C890025 adapter required



Very compatible
 Compatible
 Not compatible

Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

WINCH

<http://tiny.cc/m1winch>



FEATURES & BENEFITS

- **Powerful and compact hydraulic winch**
- **The operator easily control it from the operator's seat**

The hydraulically powered MultiOne winch is powerful enough to safely recover a stuck vehicle, haul logs, or even load a boat.

This tool is equipped with a safety net and 25 m (82 ft) steel cable.



Model	Cable Length	Pulling Force	Max reeling speed	Weight	Code	Price
Winch	25 m (82 ft)	1000 kg (2204 lbs)	2,5 m/s (8.2 ft/s)	95 kg (210 lbs)	C891210	2,408.00 \$

Compatibility	1-1 M14	22-23 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*	

(*) C890025 adapter required



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

DUMPER

<http://tiny.cc/dumper2>



FEATURES & BENEFITS

- **High capacity**

The MultiOne dumper is a very useful tool used to collect, transport, store, and empty waste. There are two sizes, a 200 l (7 ft³) unit, and the larger 400 l (14 ft³). Each of these units can stand on its own when detached from the MultiOne, and easily dumped by the machine when full.



Model	Capacity*	Width	Weight	Code	Price
200	200 l (7 ft ³)	97,5 cm (38.4 in)	60 kg (132 lbs)	C890280	1,204.00 \$
400	400 l (14 ft ³)	97,5 cm (38.4 in)	97 kg (214 lbs)	C890285	1,682.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S025	4.2 S2	5.3-2 T2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Model															
200	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
400	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TIMBER GRAB

<http://tiny.cc/timbergrab>




FEATURES & BENEFITS

- Versatile attachment for transporting and loading of timber, branches, etc.
- Strong and durable design
- Available with hydraulic rotator or as freely rotating version

The MultiOne timber grab is the ideal tool for the handling of timber, branches, wood waste, kerb stones etc. No matter if you clamp more logs or just a single one, thanks to the excellent closing characteristics, the load is held tight securely.

Strong and durable design guarantees long service life of the attachment.

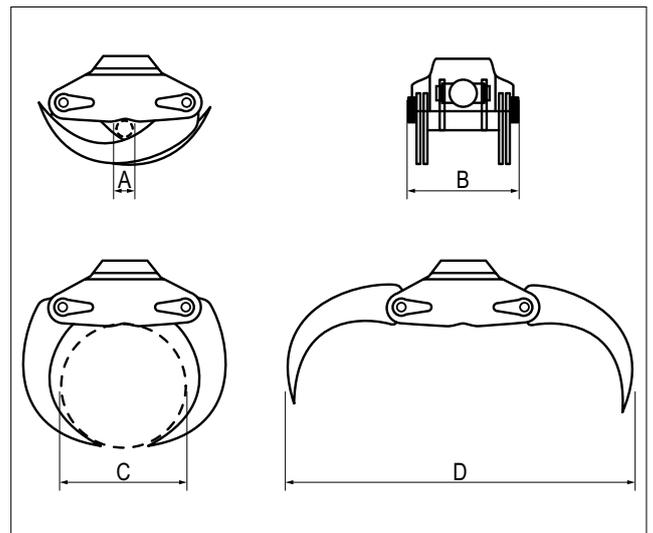

Dimensions (mm/in)			
A	B	C	D
60 / 2.4	270 / 10.6	500 / 19.7	1050 / 42

Model	Lifting Capacity*	Max Opening Length	Weight	Code	Price
Timber grab	1000 kg (2204 lbs)	1050 mm (42 in)	170 kg (375 lbs)	C890581	3,338.00 \$
Timber grab w/rotator	1000 kg (2204 lbs)	1050 mm (42 in)	185 kg (408 lbs)	C890582	4,865.00 \$

(* verify the lifting capacity of the machine)

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Timber grab	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
Timber grab w/rotator	Red	Yellow	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

(* C890025 adapter required)



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TREE SHEAR

<http://tiny.cc/treeshear>



FEATURES & BENEFITS

- Powerful and safe tree shear
- Clean and precise cuts

The MultiOne tree shear is a combination of a grapple to grab and safely control a tree and a powerful cutting shear to harvest the tree. Through the reach of the MultiOne's boom, this unit can also be used to prune branches, and clear scrub growth in difficult to reach places.



Model	Ø Max limb	Max Opening	Weight	Code	Price
Hydraulic Blade	15 cm (5.9 in)	50 cm (19.68 in)	250 kg (552 lbs)	C891071	12,480.00 \$
Fixed Blade	10 cm (3.93 in)	60 cm (23.62 in)	150 kg (330 lbs)	C891070	5,824.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*
Hydraulic Blade	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
Fixed Blade	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

LOG GRAPPLE

<http://tiny.cc/loggrab>



FEATURES & BENEFITS

- Useful attachment for fencing and forest work
- Independent arms operated by two cylinders

The heavy duty MultiOne log grapple is a very powerful and flexible tool used to securely grab, lift, and transport harvested logs. The hydraulically powered grapple arms firmly grip the logs, securing them to the lower forks. The design of the grapple accommodates small logs to large tree trunks.



Model	Working width	Teeth length	Weight	Code	Price
Log Grapple	100 cm (39.4 in)	101 cm (39.8 in)	120 kg (265 lbs)	C890580	2,408.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	3.5-20 S225	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*	

(*) C890025 adapter required



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

LOG SPLITTER

<http://tiny.cc/logsplitter>



FEATURES & BENEFITS

- **Powerful log splitter**

The hydraulically powered MultiOne log splitter allows you to safely and quickly split cut logs into firewood. The large support table is great for handling large tree cut-offs, and the twin safety grip activation handles assure that the operator's hands are safely away from the splitting action.



Model	Power	Wedge stroke	Max log diameter	Weight	Code	Price
Log splitter	7 ton	55 cm (21.6 in)	40 cm (15.7 in)	110 kg (43.3 lbs)	C890570	2,507.00 \$

Compatibility	1.1 M14	2.2-2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*

(*) C890025 adapter required



Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

HYDRAULIC BIO SHREDDER

<http://tiny.cc/bio-shredder>




FEATURES & BENEFITS

- **Hydraulic powered, works everywhere**
- **Multi knife rotor for mulching**

The hydraulically powered chipper/shredder is a powerful tool for quickly reducing a pile of brush, garden waste, and tree limbs to reusable shredded mulch. Combined with the MultiOne, this chipper/shredder can work in areas not reachable with a traditional towed chipper.

The machines design incorporates a feed roller that pulls the branches up to 90 mm (3.5 in) diameter into the chipper section in a controlled, safe speed. The chips are then processed by the shredder section, reducing the wood chips to mulch. The operator remains safely out of the way during the chipping/shredding process.

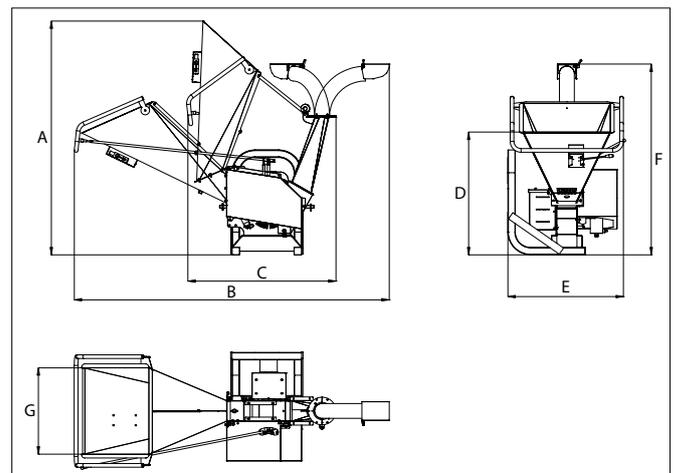

Dimensions						
	A	B	C	D	F	G
mm	1890	2110	1170	1000	940	1550
in	74.4	83	46	39.4	37	61

Model	Max timber diameter	Weight	Code	Price
Hydraulic bio shredder	9 cm (3.5 in)	210 kg (463 lbs)	C890730	7,846.00 \$

Compatibility	1.1 M14	22-23 MK-MZ	S520 4.2	S525 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4*

(*) C890025 adapter required



Very compatible
 Compatible
 Not compatible


Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

GENERAL BUCKET

FEATURES & BENEFITS

- Efficient design
- Heavy Duty construction
- Cutting edge designed for bolt on teeth

The MultiOne bucket design enables good visibility to the cutting edge, making loading, grading, and dumping more efficient. Heavy duty steel construction includes slide wear bars on the bottom of the bucket, and the cutting edge is designed for bolt-on teeth.

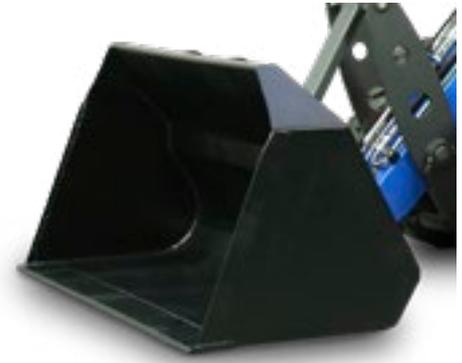

Model	Volume	Width	Weight	Nr. of teeth	Code	Price
125	350 l (12.4 ft ³)	125 cm (49.2 in)	107 kg (236 lbs)	5	C898000	1,356.00 \$
140	410 l (14.5 ft ³)	140 cm (55 in)	120 kg (265 lbs)	6	C898001	1,624.00 \$
165	470 l (16.6 ft ³)	165 cm (65 in)	142 kg (313 lbs)	7	C898002	2,158.00 \$
Accessories				Weight	Code	Price
Tooth				1,7 kg (3.7 lbs)	C890007	29.00 \$

COMBO BUCKET

FEATURES & BENEFITS

- Heavy Duty construction
- Hydraulic locking valve for load holding
- Multiple functions: digging, dozing, grading, grappling, and dumping

This multi-purpose bucket enables can be used for demolition, landscaping, and general construction work. When used as a grapple, the dual cylinders, equipped with load holding valves, provide a secure clamping force. Open the bucket for fine grading. In dumping operations, loading height is increased by opening the bucket. Heavy duty steel construction includes a cutting edge.




Model	Width	Volume	Height	Weight	Code	Price
140	140 cm (55.1 in)	375 l (13.2 ft ³)	65 cm (25.6 in)	295 kg (650 lbs)	C898121	3,763.00 \$

SNOW BLOWER

FEATURES & BENEFITS

- Efficient two-stage snow blowers
- Heavy duty frame and transimission with replaceable cutting edge

The snow blower is an efficient method to remove large amounts of snow from sidewalks, roads, or other large areas when snow needs to be spread out evenly. The two-stage blower provides a powerful and efficient snow removal tool, even if the snow is wet and heavy. To achieve this efficiency, the auger breaks up the snow and the fan throws the snow out of the discharge chute. The chute can be rotated 200° from the operator's seat, with the discharge chute height angle manually adjusted.

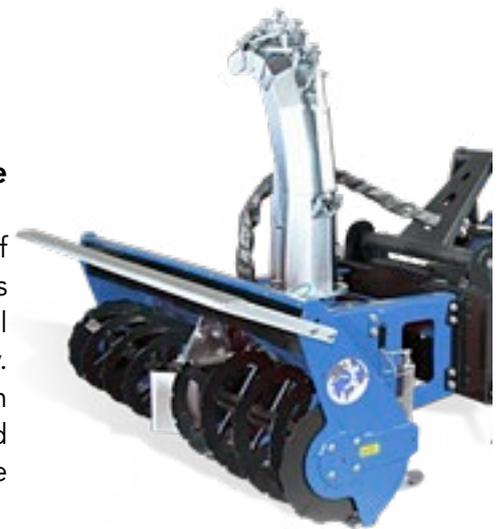

Model	Width	Rotation	Weight	Code	Price
140	140 cm (55.1 in)	200°	220 kg (485 lbs)	C890469	9,302.00 \$

PALLET FORK

FEATURES & BENEFITS

- **Must-have attachment**
- **Heavy duty construction**
- **Easily adjustable fork width**

The quick attach pallet fork enables safe and quick handling of multiple sized pallets.

The forks are forged from high strength steel, and are available in several lengths based on model size. The fork frame is designed to allow the width of the forks to be easily adjusted by as much as 1 m (39 in).




Model	Forks Length	Lifting Capacity	Weight	Code	Price
110	110 cm (43.3 in)	1000 kg (2204 lbs)	180 kg (397 lbs)	C898060	1,490.00 \$

SILAGE FORK

FEATURES & BENEFITS

- **Heavy duty frame**
- **Versatile and efficient**

The multi-purposed silage fork, in combination with the frame top hydraulic clamp, makes moving loose or baled silage safe and easy. The extra strength framework allows heavy loads, like round bales, log piles and more, to be safely and effectively moved.

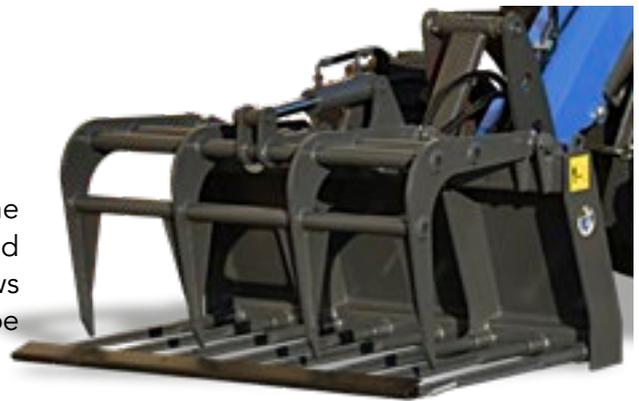

Model	Width	Weight	Code	Price
125	125 cm (49.2 in)	195 kg (430 lbs)	C898150	4,260.00 \$

SWEEPER

FEATURES & BENEFITS

- **Powerful sweeper for large areas**

This attachment quickly and quietly sweeps and collects dirt and debris, and easily dumps out the refuse. Perfect system for cleaning parking lots, sidewalks, loading docks, warehouses, and more.



Model	Working Width	Volume	Weight	Code	Price
155	155 cm (61 in)	480 l (17 ft ³)	397 kg (875 lbs)	C898100	6,418.00 \$

ALUMINIUM RAMPS



FEATURES & BENEFITS

- **Light and Durable**

The sturdy aluminum ramps are durable and lightweight for easy handling. These ramps are designed with deep ridge treads for better traction that enables safe and efficient loading and unloading of the MultiOne from trucks and trailers.

NOTE: When ordering, please specify the machine model, weight, and wheelbase.



Model	Length	Max load	Width	Weight	Code	Price
250	250 cm (98.4 in)	2480 kg (6262 lbs)	40 cm (15.7 in)	39 kg (86 lbs)	C890790	1,554.00 \$
300	300 cm (118 in)	2050 kg (4520 lbs)	40 cm (15.7 in)	50 kg (110 lbs)	C890791	1,765.00 \$
350	350 cm (138 in)	1575 kg (3472 lbs)	40 cm (15.7 in)	56 kg (124 lbs)	C890792	1,850.00 \$
400	400 cm (157.5 in)	1300 kg (2866 lbs)	40 cm (15.7 in)	79 kg (174 lbs)	C890793	2,132.00 \$
450	450 cm (177.2 in)	1090 kg (2403 lbs)	40 cm (15.7 in)	71 kg (157 lbs)	C890794	2,307.00 \$
500	500 cm (197 in)	945 kg (2084 lbs)	40 cm (15.7 in)	78 kg (172 lbs)	C890795	2,449.00 \$

MULTI CONNECTOR ADAPTORS FOR ATTACHMENTS



Adaptor for multiconnector, available with 2 or 3 lines. Upgrade required when the attachment has single line quick coupling. The multiconnector adaptor comes with female BSP 1/2" thread for attachment hoses.

Model															Code	Price	
1	Multiconnector upgrade for attachments, 2 lines														C880219	280.00 \$	
2	Multiconnector upgrade for attachments, 3 lines														C880220	330.00 \$	
Compatibility	1.1 M14	2.2-2.3 MK-MZ	S5.2D S5.2B	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4		
<div style="display: flex; justify-content: space-between; width: 100%;"> Very compatible Compatible Not compatible </div>																	

MULTI CONNECTOR ADAPTOR FOR MACHINES



Adaptor for machines, in order to connect standard flat face single lines connections. Suggested for attachments equipped with hydraulic cylinders, not with hydraulic motors. The adaptor has 3 lines to fulfill the connections with any kind of attachments.

Model															Code	Price	
Multiconnector to single line quick coupling, 3 lines for machines														C880221	450.00 \$		
Compatibility	1.1 M14	2.2-2.3 MK-MZ	S5.2D S5.2B	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4		
<div style="display: flex; justify-content: space-between; width: 100%;"> Very compatible Compatible Not compatible </div>																	

ATTACHMENT COUPLING PLATE



This plate can be welded to attachments that do not have the MultiOne style of mounting plate, making all attachments usable on the MultiOne.

NOTE: The following need to be checked before using this coupling plate (at customer charge):

- Applicable laws and safety requirements.
- Machine and hydraulic circuit interface.

Model															Code	Price	
Attachment coupling plate (to be welded) for MultiOne - 6 mm thickness														C880233	196.00 \$		
Attachment coupling plate (to be welded) for MultiOne - 12 mm thickness														C880236	242.00 \$		
Compatibility	1.1 M14	2.2-2.3 MK-MZ	S5.2D S5.2B	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4		
<div style="display: flex; justify-content: space-between; width: 100%;"> Very compatible Compatible Not compatible </div>																	



Copyright © 2018 by MultiOne America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.

TILT ADAPTER



FEATURES & BENEFITS


- Makes it possible to tilt the attachment sideways and e.g. grade the ground with a bucket or leveller, or load pallets on uneven ground with pallet fork
- Mounts between the attachment and the quick attach plate of the loader

MultiOne tilt adapter is mounted between the attachment and the loader's attachment coupling plate. With it the attachment can be tilted sideways, and makes it possible to:

- Make different forms to the ground with a bucket or leveller
- Keep pallet fork level when you are driving on surfaces with gradient
- Load pallets that are on uneven ground
- Level ground on uneven surfaces

Tilt adapter with max. 14,5 degree tilting in both directions. It is ideal for buckets, leveller and pallet fork – for jobs where tilting is a must but the tilting angle doesn't have to be big

The tilt adapter is intended mainly for nonhydraulically operated attachments, but with the optional second auxiliary hydraulics outlet in the front it is possible to mount also hydraulically driven attachments like a 4 in 1 bucket, pallet fork with hydraulic fork adjustment, grabbing tool, artificial turf attachment and rock drill at the same time.

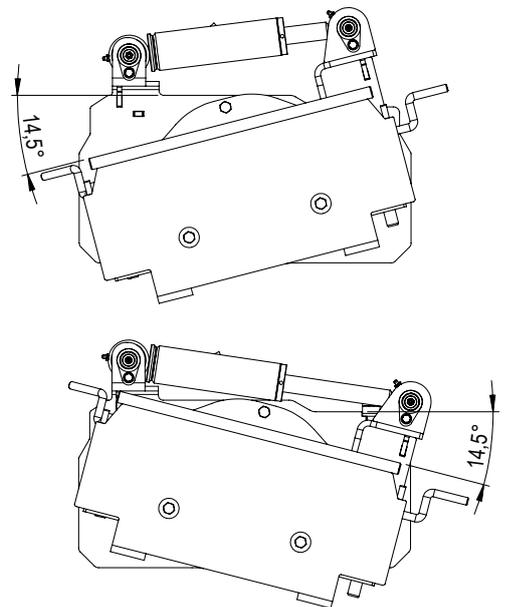

Model	Max tilt	Weight	Code	Price
Tilt adapter	+/- 14.5°	52 kg (115 lbs)	C890190	1,717.00 \$

Compatibility	1-1 M14	22-23 MK-NLZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9,5 G1980	9,6 G1980	10	6-3SD	7-3SD 8-4SD	9-5SD	12-4*


(*) C890025 adapter required

Very compatible
 Compatible
 Not compatible



SKID-STEER ATTACHMENT ADAPTER PLATE

Coupling adapter suitable to mount skid steer attachments on MultiOne mini loader.

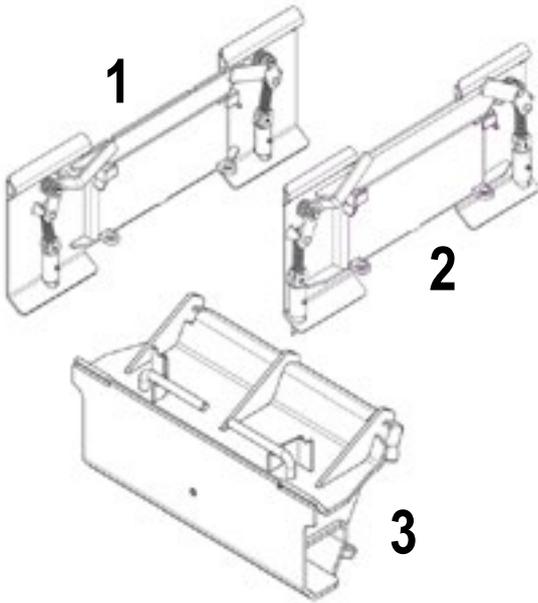

Model	Code	Price
1 - Full size skid steer attachment adapter plate	C890020	740.00 \$
2 - MT skid steer attachment adapter plate	C890023	740.00 \$
3 - Mini skid steer attachment adapter plate	C880230	740.00 \$

Compatibility	7.1 M14	22-23 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1950	9.6 G1960	10	6.3SD	7.3SD 8.4SD	9.5SD	12.4	
	Very compatible						Compatible					Not compatible				

Copyright © 2018 by MultiOne-America. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means. The information and images in this document are provided for illustrative purposes only and do not bind the manufacturer, who reserves the right to make modifications at any time without prior warning.



MULTI1ONE

WWW.MULTIONE.US

MultiOne America
3031 E. Cherry Street
MO 65802 Springfield
Ph: +1 417-351-35854
info@multione.us

The information and images herein contained are provided for illustrative purposes only and are not binding on MultiOne, who reserves the right to change them at any time without notice.
©2018 MultiOne America. All rights reserved.