





FROM SEED TO TURF



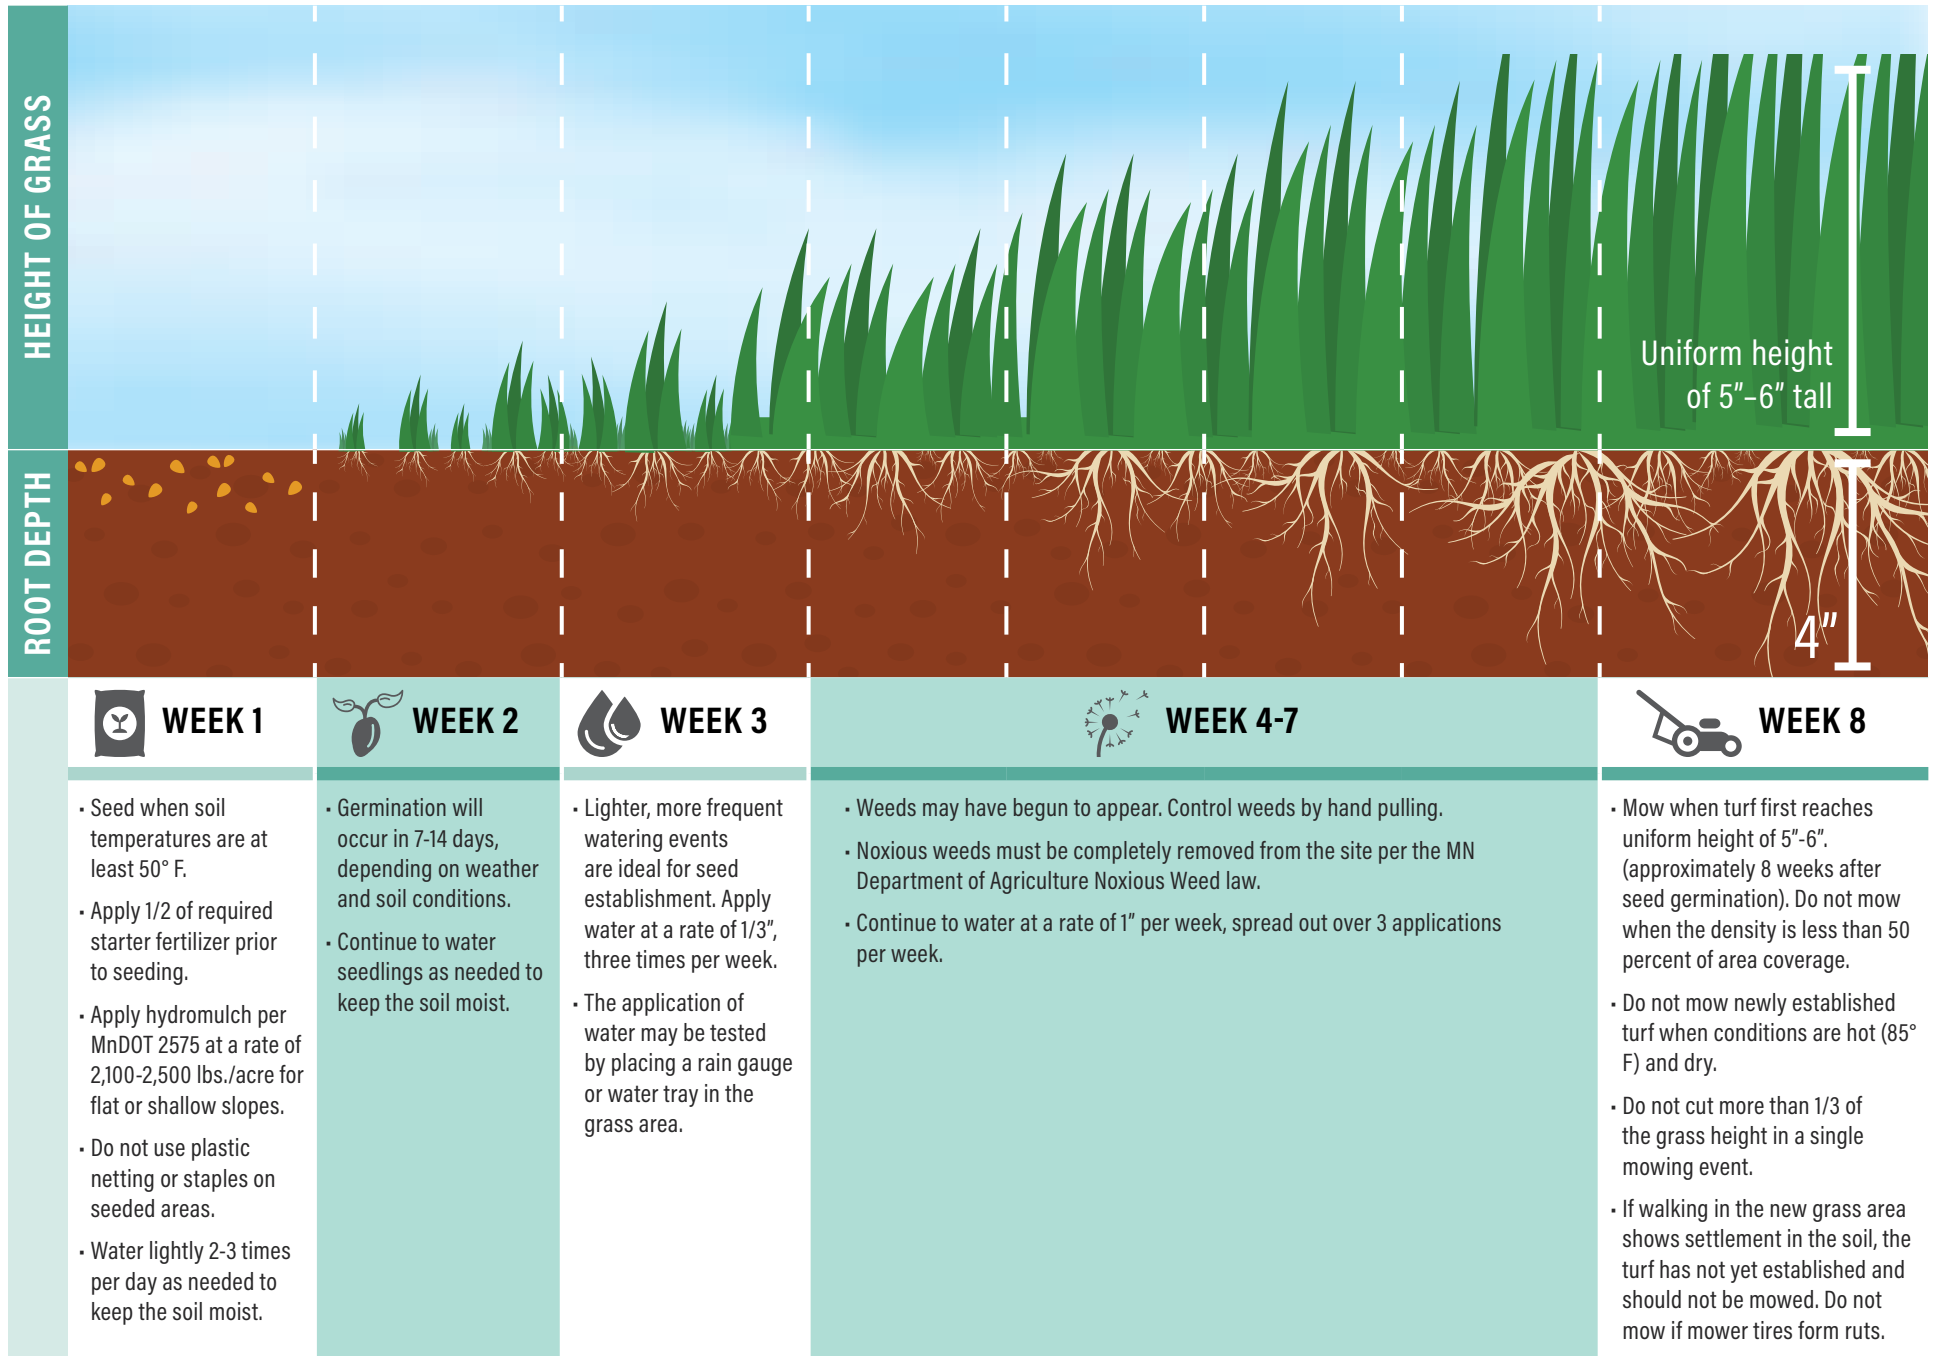

BOULEVARD TURF ESTABLISHMENT - BEST PRACTICES

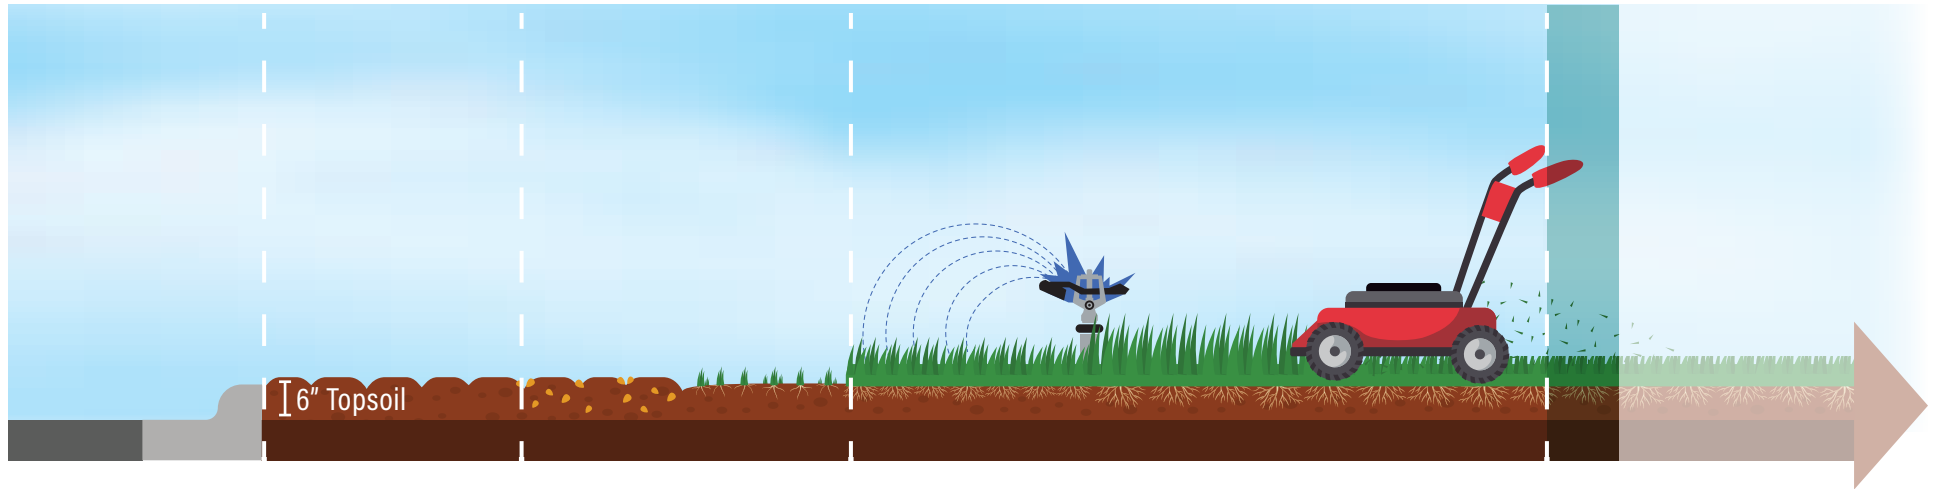

FINISH ROAD CONSTRUCTION	SOIL PREPARATION	SEEDING OR SODDING	CONTRACTOR CARE AND ESTABLISHMENT	END OF WARRANTY PERIOD	PROPERTY OWNER CARE
<ul style="list-style-type: none"> • All debris must be removed from boulevard. • Till and rake subsoil so it is smooth and even. • Perform walk-through prior to approval 	<ul style="list-style-type: none"> • 6" topsoil gives the best results. • Soil will settle, so fill areas high. • If late in season, temporary erosion control may be required until spring. • 8% organic content is goal for soil. • Perform walk-through prior to seeding 	<ul style="list-style-type: none"> • Determine which grass species are appropriate for your site. • Seed will get better long term results but sod gives immediate finished appearance. • Sod is best for erosion prone areas. • Apply half of the recommended fertilizer at seeding (the other half is applied in weeks 6-8). 	<ul style="list-style-type: none"> • Water seed and seedling to keep from drying during the first 14 days. • Light watering 2-3 times per day for sod, until roots are established. • When the grass is 6" tall, mow it to 4" high. When it reaches 6" mow it again. Repeat a 3rd time. It can now be mowed with the rest of the lawn. • 70% grass cover required for removal of erosion control measures (NPDES permit). 		