


PREPARED BY  
HIGHWAY PLANNING SURVEY  
IN COOPERATION WITH  
U.S. PUBLIC ROADS ADMINISTRATION

STATE OF MINNESOTA  
DEPARTMENT OF HIGHWAYS  
ROAD LIFE STUDIES  
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 7307  
TRUNK HIGHWAY 76  
COUNTY Stearns  
DISTRICT 35

LIMITS: W. Co. Line - S. Jct. T.H. 71

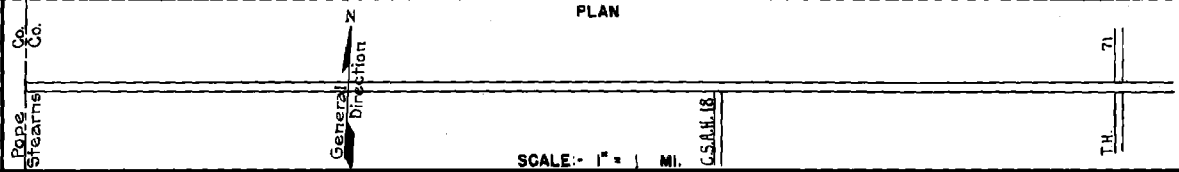

| YEAR BUILT | PROJECT N <sup>o</sup> | DESCRIPTION       |          |           | REMARKS                            | CODE N <sup>o</sup> |
|------------|------------------------|-------------------|----------|-----------|------------------------------------|---------------------|
|            |                        | TYPE              | WIDTH    | THICKNESS |                                    |                     |
| 1923       | 26-26-23B              | Grading<br>Gravel | 30<br>24 | 4 1/4"    | 2000 C.Y./Mile.                    |                     |
| (1)        |                        |                   |          |           |                                    |                     |
| 1931       | 26-26-23B              | Oil Tr. Gravel    | 26       | 1"        | 12454 Gal./Mile.<br>Maint. Dept.   |                     |
| 1938       | A.F.E. 33              | Stab. Gravel      | 30       | 4"        | Maint. Dept.                       |                     |
| 1939       | A.F.E. 17              | Mixed Bitum.      | 26       | 1"        | Maint. Dept.                       |                     |
| M          |                        | Spot Treat.       |          |           | SC3 R0 920 Gal./Mi.                |                     |
| 1941       | A.F.E. 50              | Bit. Surf. Repair | 26       |           | Grav. 67 C.Y./Mi.<br>Maint. Dept.  | 9.52                |
| M          |                        | Spot Treat.       |          |           | SC3b RT-6 3724 Gal./Mi.            |                     |
| 1942       | A.F.E. 4               | Bit. Surf. Repair | 26       |           | Grav. 182 C.Y./Mi.<br>Maint. Dept. | 9.52                |
| M          |                        | Spot Treat.       |          |           | MG3 1857 Gal./Mi.                  |                     |
| 1943       | A.F.E. 4               | Bit. Surf. Repair | 26       |           | Grav. 79 C.Y./Mi.<br>Maint. Dept.  | 9.52                |
| M          |                        | Spot Treat.       |          |           | MG3 3797 Gal./Mi.                  |                     |
| 1944       | A.F.E. 4               | Bit. Surf. Repair | 26       |           | Grav. 156 C.Y./Mi.<br>Maint. Div.  | 9.52                |
| M          |                        | Spot Treat.       |          |           | SC-3 1793 Gal./Mi.                 |                     |
| 1945       | A.F.E. 4               | Bit. Surf. Repair | 26       |           | Grav. 89 C.Y./Mi.<br>Maint. Div.   | 9.52                |
| M          |                        | Spot Treat.       |          |           | RT-A 1900 Gal.                     |                     |
| 1946       | A.F.E. 4               | Bit. Surf. Repair | 24       |           | Agg. 147 C.Y.                      | 9.52 (Net 0.37)     |
| M          |                        | Spot Treat.       |          |           | SC-3 29395 Gal.                    |                     |
| 1947       | A.F.E. 4               | Bit. Surf. Repair |          |           | Agg. 1977 C.Y.                     | 9.52 (Net 2.75)     |
| M          |                        | Spot Treat.       |          |           | SC3 22227 Gal.                     |                     |
| 1948       | A.F.E. 4               | Bit. Surf. Repair | 24       |           | Agg. 1645 Tons                     | 9.52 (Net 2.35)     |
| M          |                        | Spot Treat.       |          |           | SC3 18416 Gal.                     |                     |
| 1949       | A.F.E. 4               | Bit. Surf. Repair | 24       |           | Agg. 1421 Tons                     | 9.52 (Net 2.02)     |
| M          |                        | Spot Treat.       |          |           | SC-3 36769 Gal.                    |                     |
| 1950       | A.F.E. 4               | Bit. Surf. Repair | 24       |           | Agg. 2266 C.Y.                     | 9.52 (Net 4.45)     |

| YEARS FROM | TO   | TOTAL MILES | UNINCORPORATED |         | INCORPORATED |         | RURAL     |         | URBAN     |         |
|------------|------|-------------|----------------|---------|--------------|---------|-----------|---------|-----------|---------|
|            |      |             | RDWY. MI.      | BR. MI. | RDWY. MI.    | BR. MI. | RDWY. MI. | BR. MI. | RDWY. MI. | BR. MI. |
| 1923       | 1952 | 9.52        | 8.51           | 0.00    | 1.01         | 0.00    | 8.51      | 0.00    | 1.01      | 0.00    |
| 1953       | 1955 | 9.52        | 8.96           | 0.00    | 0.56         | 0.00    | 8.96      | 0.00    | 0.56      | 0.00    |
| 1956       |      | 9.01        | 9.01           | 0.00    | 0.00         | 0.00    | 9.01      | 0.00    | 0.00      | 0.00    |

REMARKS: Layout is to scale as of 1923

(1) This work not done under this project number but lies within the limits of this project.

PREPARED BY  
HIGHWAY PLANNING SURVEY  
IN COOPERATION WITH  
U.S. PUBLIC ROADS ADMINISTRATION


STATE OF MINNESOTA  
DEPARTMENT OF HIGHWAYS  
ROAD LIFE STUDIES  
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 7307  
TRUNK HIGHWAY 28  
COUNTY Stearns  
DISTRICT 3B

LIMITS: W. Co. Line - S. Jct. T.H. 71

Ref. Pt. 092+00.592 - 101+00.723

| YEAR BUILT | PROJECT N <sup>o</sup> | DESCRIPTION                                  |                   |                                                         | CODE N <sup>o</sup> |
|------------|------------------------|----------------------------------------------|-------------------|---------------------------------------------------------|---------------------|
|            |                        | TYPE                                         | WIDTH             | THICKNESS                                               |                     |
| M<br>1951  | A.F.E. 4               | Spot Treat.<br>Bit. Surf. Repair             | 24'               |                                                         |                     |
|            |                        |                                              |                   | 5G4, 3113 Gal.<br>Agg. 200 C.Y.                         |                     |
| M<br>1952  | A.F.E. 4               | Spot Treat.<br>Bit. Surf. Repair             | 24'               |                                                         |                     |
|            |                        |                                              |                   | SC3&RT-4, 20061 Gal.<br>Agg. 1252 C.Y.                  |                     |
| M<br>1953  | A.F.E. 604             | Spot Treat.<br>Bit. Surf. Repair             | 24'               |                                                         |                     |
|            |                        |                                              |                   | Bit. 21645 Gal.<br>Agg. 1978 Tons                       |                     |
| C<br>1956  | 7307-05<br>7307-06     | Grading<br>Bit. Stab. base<br>Plant Mix Bit. | 36'<br>36'<br>24' | 6"<br>2"                                                |                     |
|            |                        |                                              |                   | Ext. W98D&Const. C66<br>on 1/2" Sand-Grav. Sub-base     |                     |
| M<br>1959  | A.F.E. 605             | Bit. Seal Coat                               | 25'               |                                                         |                     |
|            |                        |                                              |                   | RC-3, 26912 Gal.<br>Agg. 969 C.Y.                       |                     |
| C<br>1976  | 7307-08                | Bit. Resurf. &<br>TURN LANES                 | 24'               | 1 1/2"                                                  |                     |
|            |                        |                                              |                   | Agg. C.L. & SHDRS.<br>TEST SEC. 446+75<br>To 460+00     |                     |
| C<br>1979  | 7307-09                | Bit. SURFACE<br>AGG. SHOULDERS               | 24'               | 1 1/2"<br>8' VAR.                                       |                     |
| C<br>1983  | 7300-05                | Guardrail Improvements                       |                   |                                                         | 2 Sections          |
| M<br>1984  | 7307<br>SF             | Chip Seal Coat                               | 24'               |                                                         |                     |
|            |                        |                                              |                   | 84 Tons FA-2 Seal Coat Body<br>1300 Gal. CRS-2 Emulsion |                     |
| C<br>1990  | 7307-11                | Bit. Overlay                                 | 24'               | 2"<br>1 1/2"                                            |                     |
|            |                        |                                              |                   | Spec. 2331<br>Spec. 2341                                |                     |
| M<br>1993  | M93146                 | Bit. Sealing                                 |                   |                                                         |                     |
| M<br>2000  | 8823-13                | Bit. Seal Coat                               |                   |                                                         | Type FA-2           |
| S<br>2005  | 8823-65                | Bit. Seal Coat                               |                   |                                                         | Type FA-3           |
|            |                        | Micro-Surfacing                              | 24'               |                                                         | Type FA-2           |
|            |                        | Bit. Seal Coat                               | 24'               |                                                         | Type FA-2           |

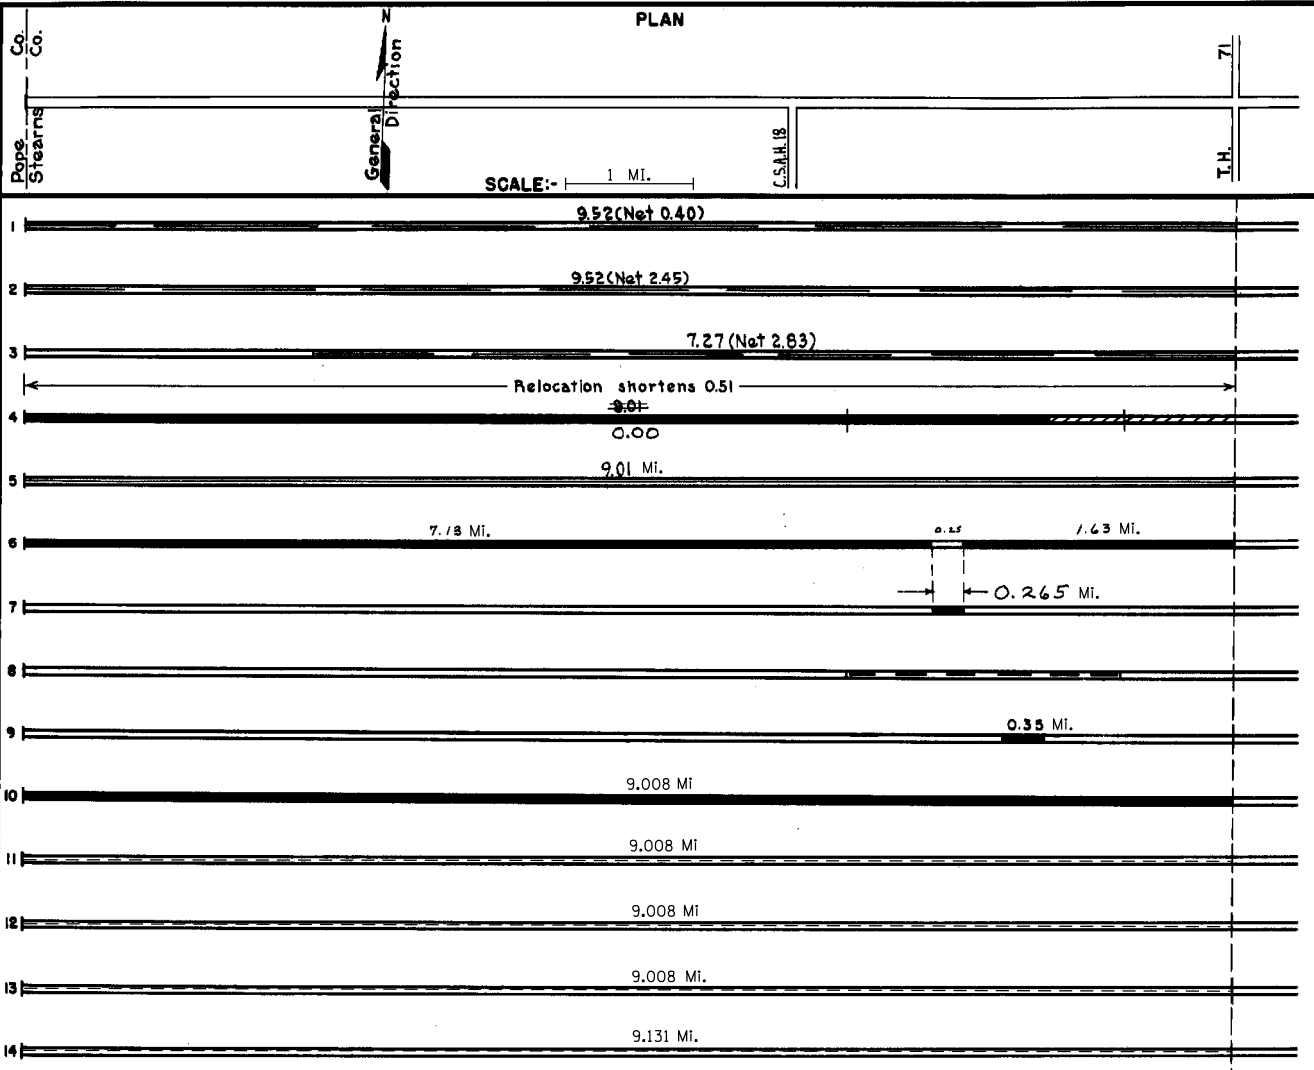

| YEARS |    | TOTAL MILES | UNINCORPORATED |         | INCORPORATED |         | RURAL     |         | URBAN     |         |
|-------|----|-------------|----------------|---------|--------------|---------|-----------|---------|-----------|---------|
| FROM  | TO |             | RDWY. MI.      | BR. MI. | RDWY. MI.    | BR. MI. | RDWY. MI. | BR. MI. | RDWY. MI. | BR. MI. |
|       |    |             |                |         |              |         |           |         |           |         |

REMARKS: See Sheet No. 1