


DESIGNER NOTES (REMOVE FROM LAYOUT BEFORE INSERTING IN PLAN):

- 1. INSERT SPACING CHART DISTANCES INTO LAYOUTS AND REMOVE CHART WHENEVER PRACTICAL.
- 2. DETERMINE IF "END ROAD WORK" SIGNS ARE NEEDED.
- CONSIDER THE INSTALLATION OF A PCMS AND/OR G20-X2 OR SPECIAL SIGN IF CONGESTION IS EXPECTED, IF ADVANCE SIGNING TO DIVERT TRAFFIC IS NEEDED, OR OTHER CONDITIONS DETERMINED BY THE ENGINEER. 3.
- 4. CONSIDER THE INSTALLATION OF A PCMS AND/OR G20-X1 SIGN (MODIFIED) OR G20-X2 SIGN FOR SEVEN DAY ADVANCE WARNING OF RESTRICTION.
- 5. FOR ANY EXCAVATION OR DROP-OFF IN EXCESS OF 12 IN., SEE THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES SECTION 6F.85 "TEMPORARY TRAFFIC BARRIERS".
- 6. FOR CLOSURES GREATER THAN 1000 FT., SEE LAYOUT 70 "LANE CLOSURE EXTENSION".
- 7. \times REQUIRED FOR SPEEDS 45 MPH AND GREATER.
- 8. SELECT APPROPRIATE MATERIAL FOR TEMPORARY MARKINGS. SEE STRIPING KEY.
- 9. WHEN IMPACTING PEDESTRIAN FACILITIES, TEMPORARY PEDESTRIAN ACCESS ROUTES MUST BE PROVIDED. SEE LAYOUT 6J-24 AND 6J-25 FOR GUIDANCE.
- 10. CONTACT APPROPRIATE ROAD AUTHORITY FOR SIGNAL TIMING MODIFICATIONS AND POSSIBLE TURN RESTRICTIONS BEFORE BEGINNING WORK AT ANY SIGNALIZED INTERSECTION.
- 11. COVER OR MODIFY ALL DIRECTIONAL SIGNING AFFECTED BY ANY TURN RESTRICTIONS. INCLUDE SIGN MODIFICATIONS, COVERS OR REMOVALS IN TRAFFIC CONTROL PLAN.
- 12. CONSIDER RIGHT TURN LANE PLACEMENT BASED ON EXPECTED QUE LENGTHS.
- 13. THE FLASHING ARROW BOARD SHALL BE USED WHEN THE POSTED SPEED LIMIT IS 45 MPH OR GREATER, AND SHALL BE PLACED FULLY ON THE SHOULDER. IF THERE IS NO SHOULDER, OR THE SHOULDER IS TO NARROW, PLACE THE FLASHING

4" SOLID WHITE REMOVEABLE_PREFORMED (4SW) PLASTIC MARKING

DRUMS, TYPE I OR TYPE II BARRICADE OR VERTICAL PANEL. •

-•-•-• SOLID LINE PAVEMENT MARKING WITH TEMPORARY RAISED PAVEMENT MARKERS AT 10' SPACING OR WET REFLECTIVE TAPE

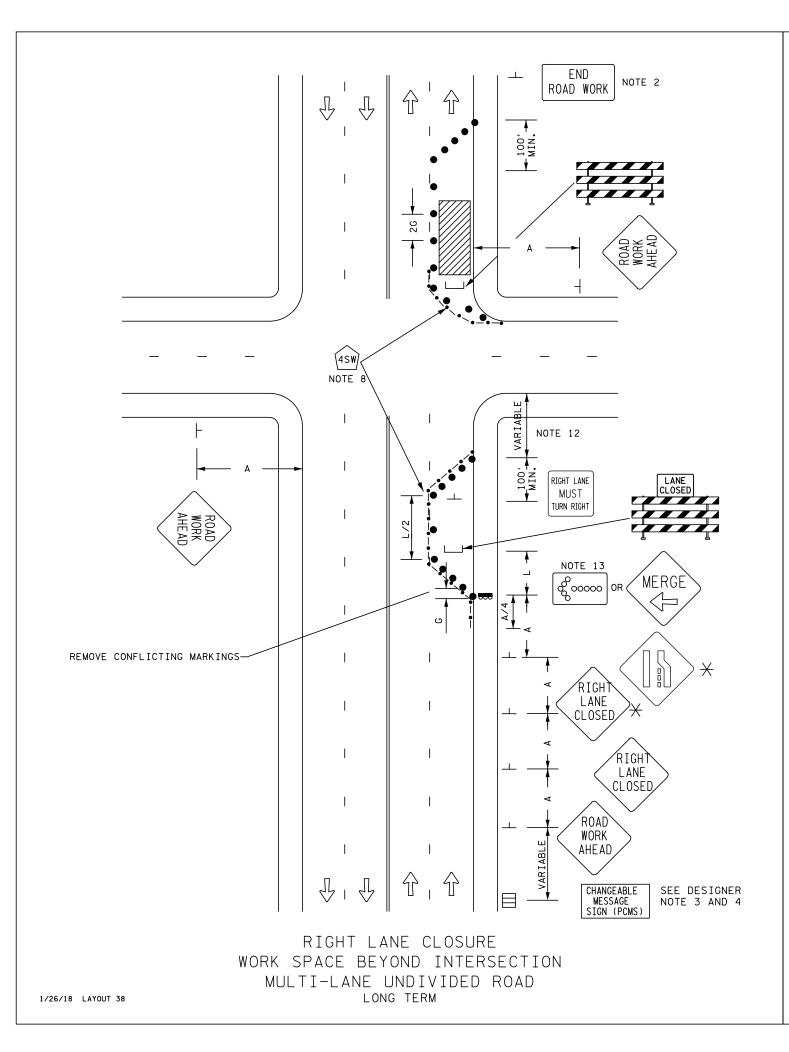

TAPER LENGTH (L)	BUFFER SPACE (B)
FEET	FEET
200	200
325	305
600	425
700	500
800	650
900	820
	LENGTH (L) FEET 200 325 600 700 800

ARROW BOARD AT THE END OF THE TAPER IN LIEU OF THE TYPE III BARRICADE ASSEMBLY.