

**SIGN DATA**

SIGNS TO BE PLACED ON DRIVEN U-POSTS SHALL BE PLACED IN ACCORDANCE WITH TABLE 1 OR 2 BELOW. IF THE TTC PLAN PLACES POST MOUNTED TEMPORARY SIGNS ADJACENT TO EXISTING STRUCTURES THERE SHALL BE NO MORE THAN TWO U-POST WITHIN 84 INCHES OF EACH OTHER ALIGNED IN THE SAME PLANE SO AS NOT TO COMPROMISE THAT STRUCTURE'S AND THE NEW DEVICE'S CRASHWORTHINESS. IF IT IS NOT POSSIBLE TO MAINTAIN THIS SPACING THEN THE POST MOUNTED TEMPORARY SIGNS SHALL BE PLACED A MIN OF 4' BEYOND THE IN PLACE STRUCTURES. SIGN PANELS SHALL BE PLACED ON SIGN STRUCTURES TO MEET THE 5' MIN DEPICTED ON THE TYPICAL RURAL DESIGN DETAIL, THE 7' MIN DEPICTED ON THE TYPICAL URBAN DESIGN DETAIL, AND THE 9' MIN DEPICTED ON THE TYPICAL MOUNTING DETAIL ON THIS SHEET.

STANDARD CONSTRUCTION SIGNS IN MnDOT STANDARD SIGNS AND MARKINGS MANUAL

**TABLE 1**

PANEL SIZE (IN.)	POSTS			
	NO. & TYPE	SPACING (IN.)	KNEE BRACES QUANT.	LENGTH (FT.)
24 x 24	2-U	18		13
30 x 24	2-U	18		13
36 x 30	2-U	24		13
36 x 36	2-U	18		14
42 x 36	2-U	30		14
48 x 48	2-U	30		15
60 x 60	2-U	42	1	16
66 x 60	2-U	42	2	16
72 x 72	2-U	42	2	17
96 x 54	2-U	54	2	19
96 x 84	2-U	54	2	19
132 x 108	3-U	45	3	22
168 x 132	4-U	48	4	25

**GENERAL NOTES:**

1. POST LENGTHS ARE APPROXIMATE AND INCLUDE EMBEDMENT, BUT DO NOT INCLUDE ADDITIONAL LENGTH REQUIRED FOR SPLICE.
2. SEE MnDOT STANDARD SIGNS AND MARKINGS MANUAL FOR PUNCHING HOLES.
3. MINIMUM OF 45" SPACING BETWEEN POSTS MUST BE MAINTAINED WHEN USING MORE THAN TWO POSTS.

**TABLE 2**


SPECIAL DESIGN CONSTRUCTION SIGNS

PANEL SIZE		POSTS			
LENGTH (IN.)	HEIGHT (IN.)	NO. & TYPE	SPACING (IN.)	KNEE BRACES QUANT.	LENGTH (FT.)
54 - 96	78	2-U	42	2	20
102 - 138	78	3-U	45	3	20
144 - 180	78	4-U	45	4	20


DESIGNER NOTE: INCLUDE SPECIAL SIGN DETAILS IN THE TRAFFIC CONTROL PLAN IN TABLE TWO.

NOTES: FOR TEMPORARY CONSTRUCTION SIGN FRAMING, THE CONTRACTOR MAY USE GRADE 5 ZINC PLATED BOLTS FOR ALL BOLTED CONNECTIONS, EXCEPT FOR THE KNEE BRACE CONNECTION TO THE REAR STUB POST, WHICH SHALL UTILIZE A 5/16 INCH STAINLESS STEEL BOLT AND NYLON INSERT LOCK NUT. ADDITIONAL SIGN FRAMING DETAILS CAN BE FOUND IN THE TRAFFIC ENGINEERING MANUAL PART 6.


IF THE CONTRACTOR ELECTS TO USE SOME OTHER TYPE OF SIGN SUPPORT (OTHER THAN U-CHANNEL SIGN POSTS) FOR MOUNTING CONSTRUCTION SIGNS, DETAILS OF THE PROPOSED SIGN STRUCTURE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO ORDERING THE SIGN STRUCTURE COMPONENTS. ANY SIGN STRUCTURE TO BE SUBMITTED TO THE ENGINEER SHALL BE AN FHWA ACCEPTED BREAKAWAY SIGN SUPPORT. SIGN STRUCTURE SHALL ALSO BE APPROVED FOR 90 MPH WIND LOAD.

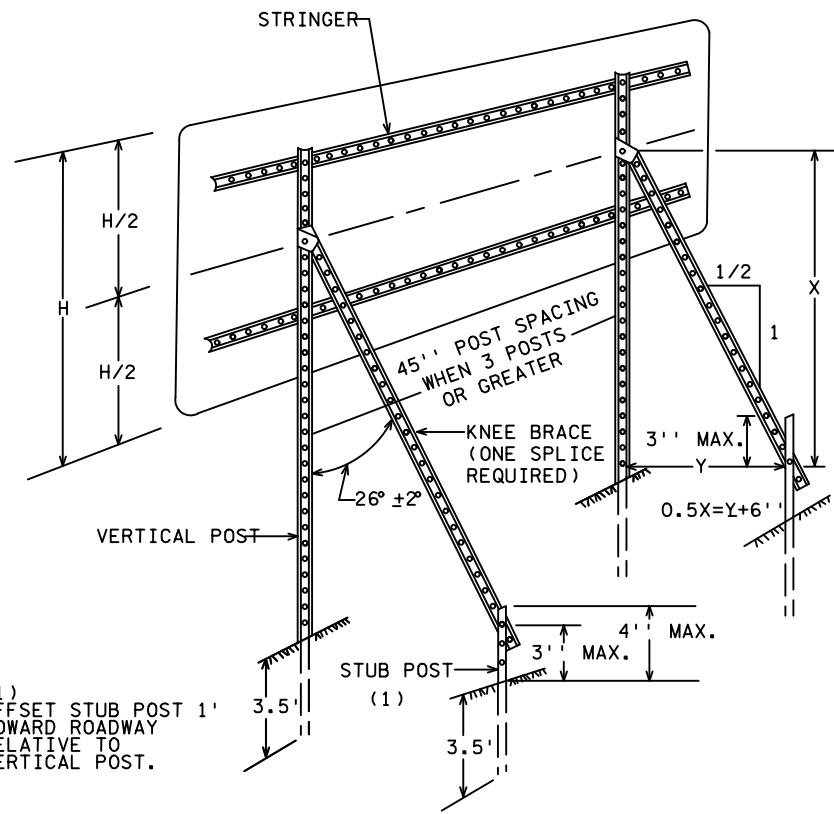


**TYPICAL "A-FRAME" INSTALLATION TYPE "D" SIGNS**

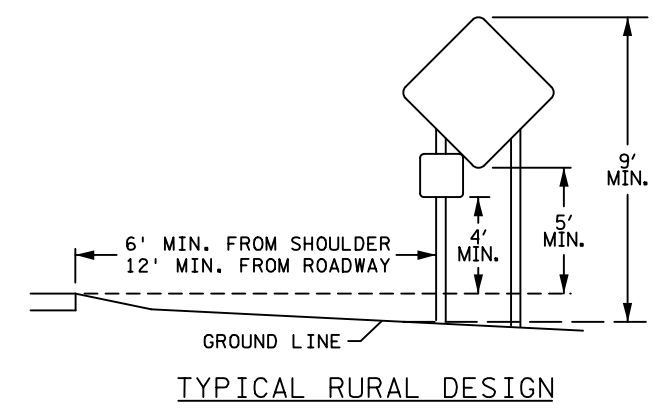


**TYPICAL RURAL DESIGN**

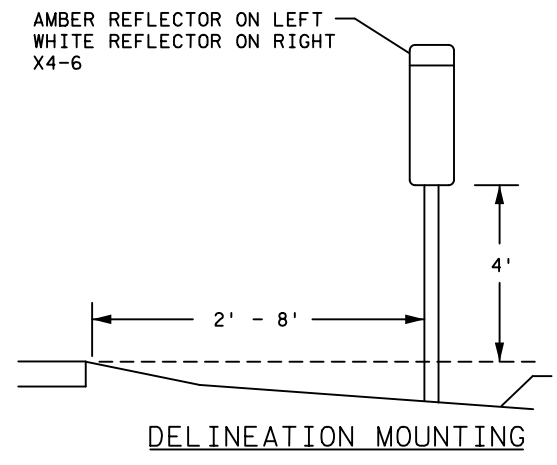

**DELINEATION MOUNTING**

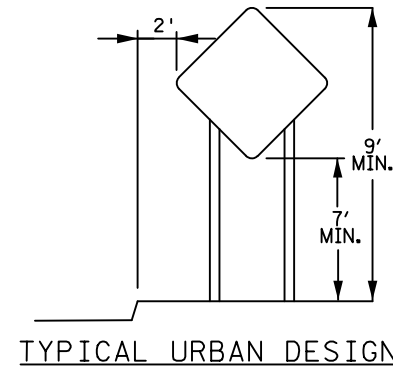

**TYPICAL URBAN DESIGN**

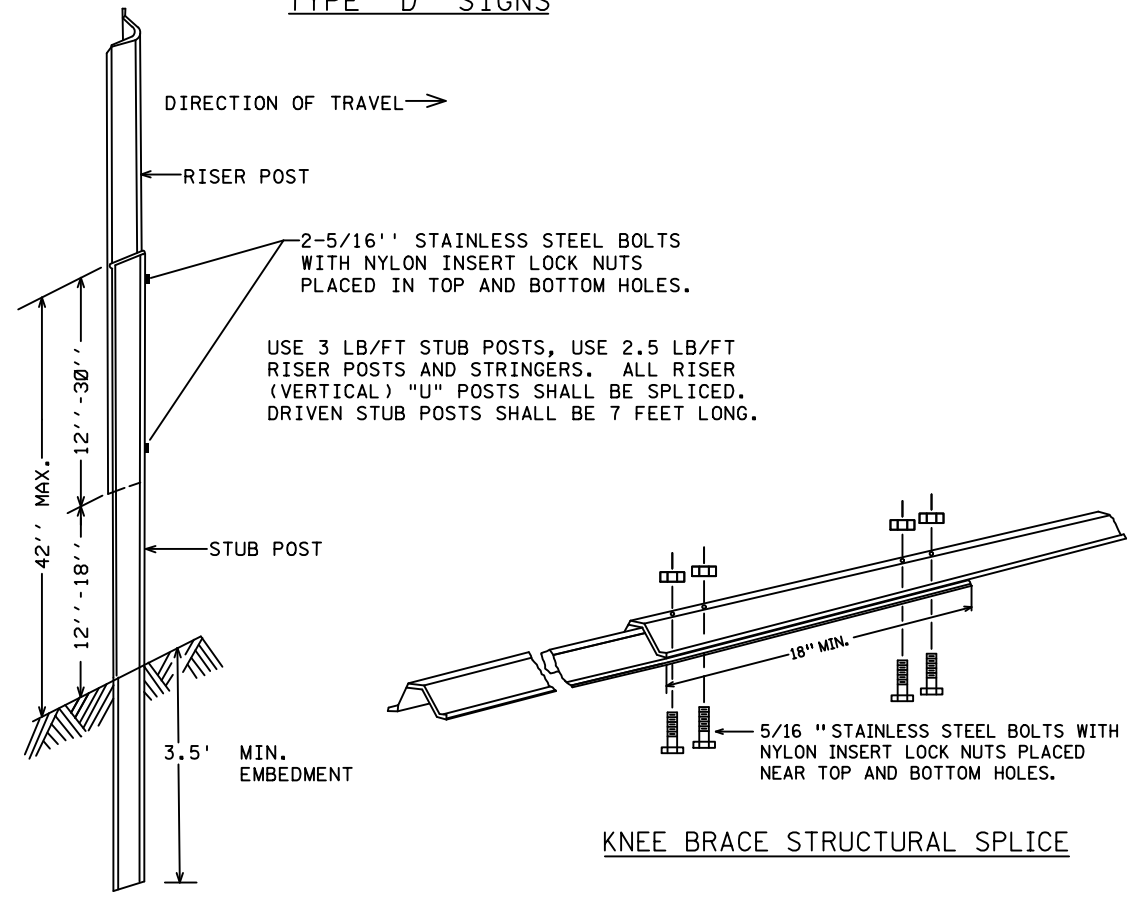

**"U" POST BREAKAWAY SPLICE**

**KNEE BRACE STRUCTURAL SPLICE**