



## 2020 RETAIL PRICE LIST

### KING PIN LINE

Effective Date: 1/1/2020



Rigid Gooseneck

Hydraulic Tail

Detachable Gooseneck

Jeep

**Monroe Towmaster, LLC.**

61381 US Hwy 12  
Litchfield, MN 55355

Phone: **320-693-7900**

Toll Free: 800-462-4517

Fax: 320-693-7921

**Parts Department**

Phone: **320-593-4595**

Toll Free: 866-239-2221

Fax: 320-693-5703



[towmaster.com](http://towmaster.com)

This page left blank.

## Trailer Model Index

---

### ***Rigid Gooseneck***

T-50RG

T-70RG

### ***Hydraulic Tail***

T-70HT

T-80HT

T-110HT

### ***Detachable Gooseneck***

T-70DTG

T-100DTG

T-110DTG

T-120DTG

### ***Jeep***

T-80J

## TOWMASTER WARRANTY SUMMARY

(FULL AND CURRENT TEXT AVAILABLE AT TOWMASTER.COM)

This warranty effective on trailers manufactured after 01/01/2009.

Monroe Towmaster, LLC. (herein referred to as Towmaster) offers this extensive warranty to the original purchaser of our trailers. Warranty starts from the date of sale as long we receive the filled-out warranty card. If we do not receive the warranty card, warranty starts from the ship date of the unit.

### LIMITED LIFETIME FRAME WARRANTY

On our premium trailers (T, TC series) Towmaster warranties the trailer main frame (frame, crossmembers, gussets, beavertail, and tongue or gooseneck) for the lifetime of the trailer to the original licensed owner to be free from defects in material and workmanship. This LIFETIME WARRANTY does not cover the hitch (ball, pintle, and gooseneck fifth wheel), tires, wheels, axles, suspension, hoists, ramps, lights, wiring, paint, wood, d-rings or any other features or options outside the scope of the trailer main frame weldment. Limited Lifetime is determined by the following criteria: The life expectancy of the trailer which is determined to be 10-YEARS on tag trailers 50,000 lb. capacity and lower, or 5-YEARS on king-pin trailers 50,000 lb. capacity and up, or 5-YEARS on dump trailers, to the original owner and is non-transferrable, limited to the first accident or overloading. This warranty also does not cover:

1. Products which have been operated in excess of rated capacities
2. Misuse, abuse or accidents
3. Vehicles which have been altered, modified or repaired in any manner not authorized by our company

### FIVE-YEAR LIMITED FRAME WARRANTY

Some economy models (TE series) carry a 5-YEAR Limited Frame Warranty with the same exclusions as stated above. Some economy models (TE series) carry our standard 1-YEAR Warranty stated below.

### AXLE / SUSPENSION WARRANTY

Each Dexter Torflex Axle carries a limited 10-YEAR WARRANTY on the suspension to be free from defect in material and workmanship. Warranty is limited to Dexter warranty policy. Other types or brands of suspensions may carry either a 5-YEAR or a 2-YEAR warranty by its manufacturer.

### PAINT WARRANTY

Towmaster warrants its paint and process against peeling or delamination of topcoat and/or other layers of paint, cracking due to failure of the product, and excessive hazing for a period of 3-YEARS from the date of manufacture. This warranty is limited to original paint from the factory and excludes paint that has been chipped, scuffed, scratched, or otherwise damaged in normal use, inclement weather, improper care, or paint on trailers that have been abused or in an accident. Towmaster's liability is limited to the repair of the affected area and covers labor and materials only, at an authorized repair service.

### FULL ONE-YEAR WARRANTY

Towmaster warranties each new product manufactured by us to be free from defects in material and workmanship for a period of one year from date of delivery to the original purchaser except as noted below.

This one-year warranty covers the entire trailer against material and workmanship except as noted:

1. New products which have been operated in excess of rated capacities
2. Misuse, abuse or accidents
3. Items that have been pinched (air or hydraulic hose)
4. Vehicles which have been altered, modified or repaired in any manner not authorized by our company
5. Second-hand or used vehicles
6. Wear items such as tires, battery, suspension, bearings, parking jacks
7. Products that have not been properly maintained (by the dealer or consumer)

In no way shall the manufacturer be held liable for consequential damages such as rentals of substitute vehicles, loss of profits, downtime, or other commercial losses. This warranty does not cover shipment of trailer or parts to dealer or manufacturer, or return shipment of trailer or parts to dealer or consumer from factory.

### TIRE / BATTERY WARRANTY

New vehicle tires are warranted by their respective manufacturers and are prorated. Battery is warranted by Towmaster and is prorated.

### TOWMASTER'S OBLIGATION

Our obligation under this warranty is to repair or replace, at no cost to the end user, any warrantable part proven defective within the time limit of this warranty at our factory or at an Authorized Towmaster Dealer. Towmaster will handle disposition of warranties on all other purchased components such as axles, suspensions, wheels, batteries, parking jacks and other purchased parts in conjunction with their respective manufacturers, and under the terms of their respective warranty policies.

We must receive immediate notification of a defect and no allowance will be made for repairs without our prior consent or approval. Manufacturer does not pre-authorize any dealership for warranty work. The dealer must call our warranty service department to receive an authorization number. If the work performed is not preauthorized with a claim number, it may be deemed void. Defective parts must be returned within twenty days of receipt of replacement parts or credit may not be given for the replacement parts and an invoice may be issued.

This warranty is in lieu of all other warranties, expressed or implied by law or otherwise, and there is no warranty of merchantability or fitness of purpose. Federal regulations require motor vehicle manufacturers to maintain a record of original owners of their equipment. Our warranty registration fulfills this requirement. Please make every effort to complete the warranty card document and send it in. This warranty written under the laws of Minnesota, USA and some provisions in this warranty may be adjusted according to your local state, province or country's laws. Complete warranty details and changes can be read on our web site, [www.towmaster.com](http://www.towmaster.com).

### CUSTOMER REGISTRATION REQUIRED

**Federal regulations require motor vehicle manufacturers to maintain a record of original owners of their equipment. Our warranty registration fulfills this requirement. Please make every effort to complete this document and send it in.**

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailers described herein without obligation in regards to trailers previously manufactured. The manufacturer also reserves the right to discontinue models without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made.

## GAWR, GVWR, and Payload Ratings

Towmaster determines the GAWR and GVWR ratings of its trailers using the following determinations:

### GAWR

GAWR is determined by using the weakest link between the axle capacity rating and the combined wheel and tire rating.

### GVWR

GVWR is determined by taking a fleet average weight, plus payload capacity rating (as determined by the manufacturer).

### Payload Capacity

Payload is determined by one of the following calculations:

If your state recognizes weight transfer to the tow vehicle transfer, then calculate payload with this formula:

$$\text{GVWR} - \text{Trailer Weight} = \text{Payload Capacity}$$

If your state ONLY recognizes GAWR or trailer capacity rating and does NOT recognize weight transfer to the tow vehicle to transfer load, then calculate using this formula:

$$\text{GAWR OR Trailer capacity} - \text{Trailer Weight} = \text{Payload Capacity}$$

Trailer weight can fluctuate depending upon dryness of the wood deck, options installed and deck length. The best way to get the actual weight of the trailer is to scale it. Our published weights and capacities are for reference only.


### Tire/Wheel Load Ratings

Tire Size	Load Range	Tire Ply	Tire/Wheel Capacity	PSI	MPH	(S)ingle (D)ual	Bolt Pattern	Approx. Tire Dia. (in.)
ST225/75Rx15	D	8	2540	65	65	S	6 on 5.5 in ø	28.3
ST225/75Rx15	D	8	2540	65	65	S	8 on 6.5 in ø	28.3
235/80Rx16	E	10	3520	80	55	S	8 on 6.5 in ø	30.8
235/85Rx16	E	10	3640	80	65	S	6 on 5.5 in ø	31.7
235/85Rx16	E	10	3640	80	65	S	8 on 6.5 in ø	31.7
235/85Rx16	E	10	3305	80	65	D	8 on 6.5 in ø	31.7
235/85Rx16	G	14	3750	110	65	S	Upgrade	31.7
235/85Rx16	G	14	3415	110	65	D	Upgrade	31.7
235/75Rx17.5	H	16	5675	125	62	D	8 on 275mm ø	30.9
215/75Rx17.5	H	16	4805	125	62	S	8 on 6.5 in ø	29.7
215/75Rx17.5	H	16	4540	125	62	D	8 on 275mm ø	29.7
235/75Rx22.5	H	16	5070	120	62	D	10 on 285.75mm ø	35.9
255/70Rx22.5	H	16	5070	120	62	D	10 on 285.75mm ø	36.1
275/75Rx22.5	H	16	6395	125	75	D	10 on 285.75mm ø	38.2

## Gooseneck Swing Clearance


### (A-Frame / Rigid Gooseneck / Hydraulic Tail)

These are the standard swing clearance dimensions on our goosenecks. Please specify swing clearance and truck height when ordering if you require a different clearance dimension.

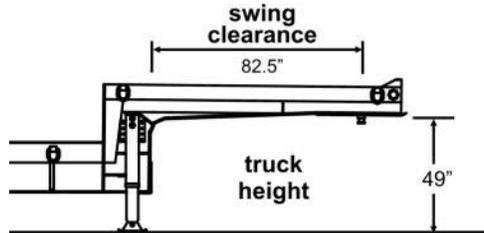


### Detachable Gooseneck Swing Clearance

Use the chart below to determine the proper gooseneck length to fit your tractor. Detachable gooseneck trailers come in a variety of gooseneck length options. These dimensions will help determine the swing clearance needed. If you have any questions, please call the factory for clarification.

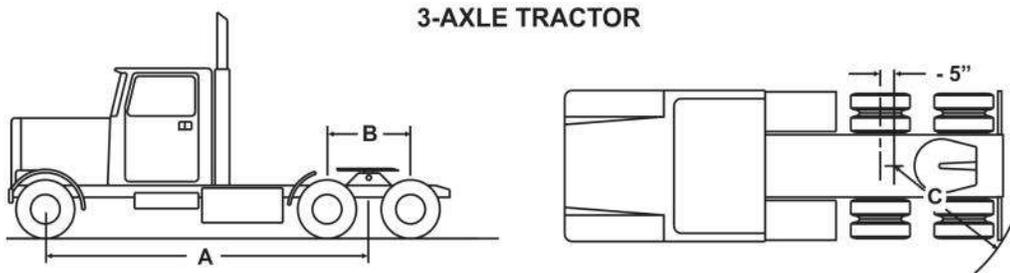

DIMENSION	DESCRIPTION
A=	Wheel Base
B=	Drive Axle Spacing
C=	Center of Forward Drive Axle, minus (-) 5 inches to outer edge of rear tire or mud flap

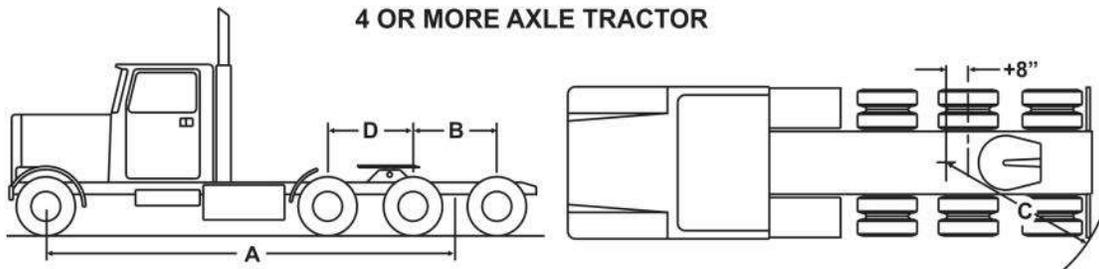


DIMENSION	DESCRIPTION
A=	Wheel Base
B=	Drive Axle Spacing
C=	Center of Forward Drive Axle, plus (+) 8 inches to outer edge of rear tire or mud flap
D=	Other Axle Spacing
	Number of Axles
Y	N
	Lift Axle

This page left blank.

Effective Date: 8/1/2018

**Rigid Gooseneck/  
T-50RG**

**Model:**

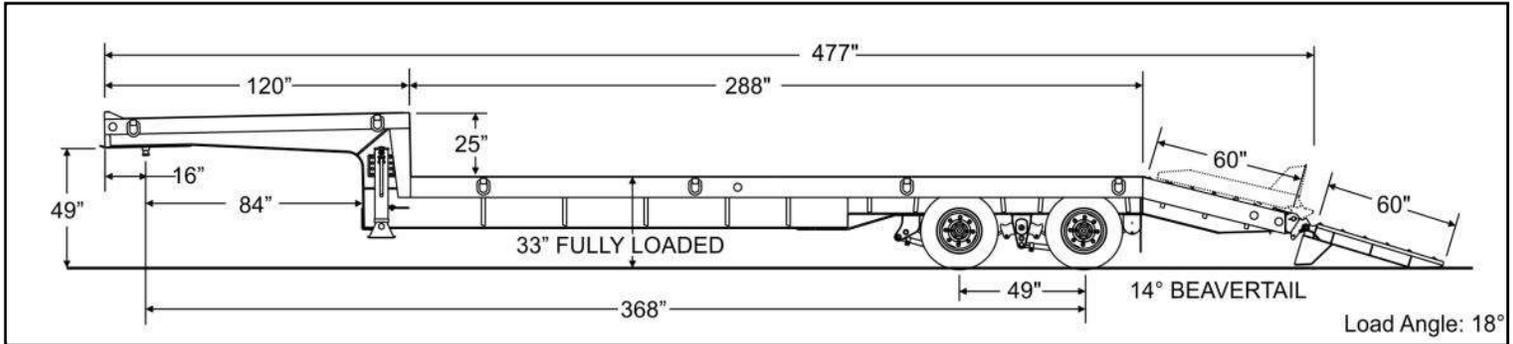

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin hitch
- 10'-0" Rigid Gooseneck
- 2" nominal white oak decking
- D-ring tie downs (2 per side)
- (2) 25K bolt-on two-speed parking jacks

**FRAME / DECK**

- 24 ft. deck length
- 102" load width
- 33" deck height (fully loaded)
- I-beam main frame
- 3" Jr. I-beam crossmembers, 80,000 psi
- 2" nominal white oak wood deck
- D-ring tie-downs (6 per side)

**RAMPS / TAIL**

- 5 ft. steel angle-iron beavertail (14°)
- Wood protectors
- 21" x 5'-0" channel sides, cleated ladder style
- Two-way spring-assist ramps

**AXLES / SUSPENSION**

- Hutchens 9700 adj. susp.
- (2) 22,500 lb. axles (8 wheels)
- Tires - 215/75R17.5, load range H, 16-ply
- 17.5" wheels, 8-bolt, hub piloted
- Air brakes (12.25x7.5)
- Auto slack adj.
- Oil bath hubs

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Ramp color: Equipment Red

\*See web site for warranty details

\*Weights and capacities vary depending upon options. Published weights are reference only.

GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
45,000	61,300	11,300	50,000	102"	24'	\$30,520

Subject to F.E.T. – deduct \$12.33 per tire

**Monroe Towmaster, LLC.**

61381 US Hwy 12  
Litchfield, MN 55355  
www.towmaster.com


Toll Free: 800-462-4517  
Local: 320-693-7900  
Fax: 320-693-7921



Effective Date: 8/1/2018

**Rigid Gooseneck/  
T-70RG**

**Model:**

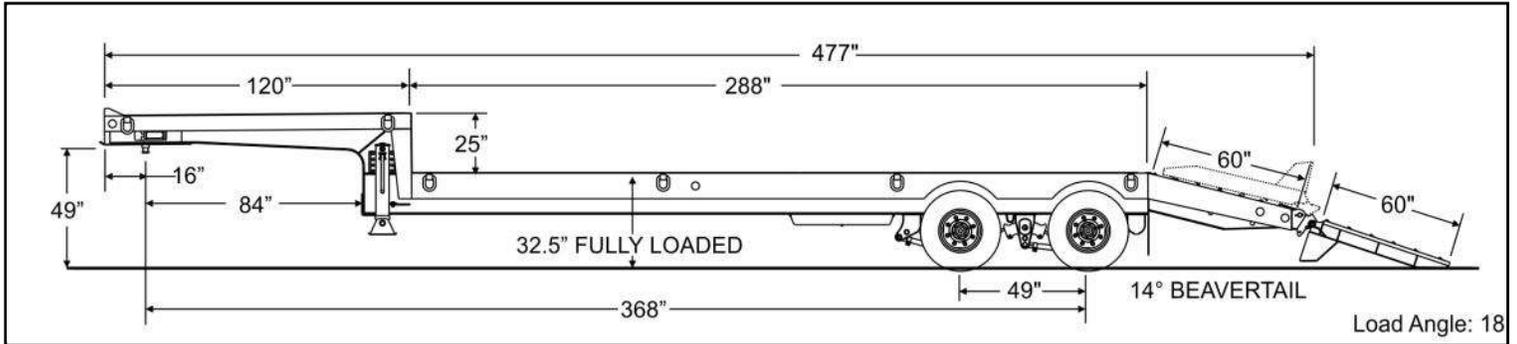

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin hitch
- 10'-0" Rigid Gooseneck
- 2" nominal white oak decking
- D-ring tie downs (2 per side)
- (2) 25K bolt-on two-speed parking jacks

**FRAME / DECK**

- 24 ft. deck length
- 102" load width
- 32.5" deck height (fully loaded)
- 14" cambered I-beam main frame (pierced)
- 6" Jr. I-beam crossmembers
- 2" nominal white oak wood deck
- D-ring tie-downs (6 per side)

**RAMPS / TAIL**

- 5 ft. steel angle-iron beavertail (14°)
- 21" x 5'-0" channel sides, cleated ladder style
- Two-way spring-assist ramps

**AXLES / SUSPENSION**

- Hutchens 9700 adj. susp.
- (2) 22,500 lb. axles (8 wheels)
- Tires - 235/75R17.5, load range H, 16-ply
- 17.5" wheels, 8-bolt, hub piloted
- Air brakes (12.25x7.5)
- Auto slack adj.
- Oil bath hubs

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Ramp color: Equipment Red

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
45,000	82,600	12,600	70,000	102"	24'	\$37,930

Subject to F.E.T. – deduct \$23.67 per tire

Effective Date: 8/1/2018

Hydraulic Tail/  
**T-70HT**

**Model:**

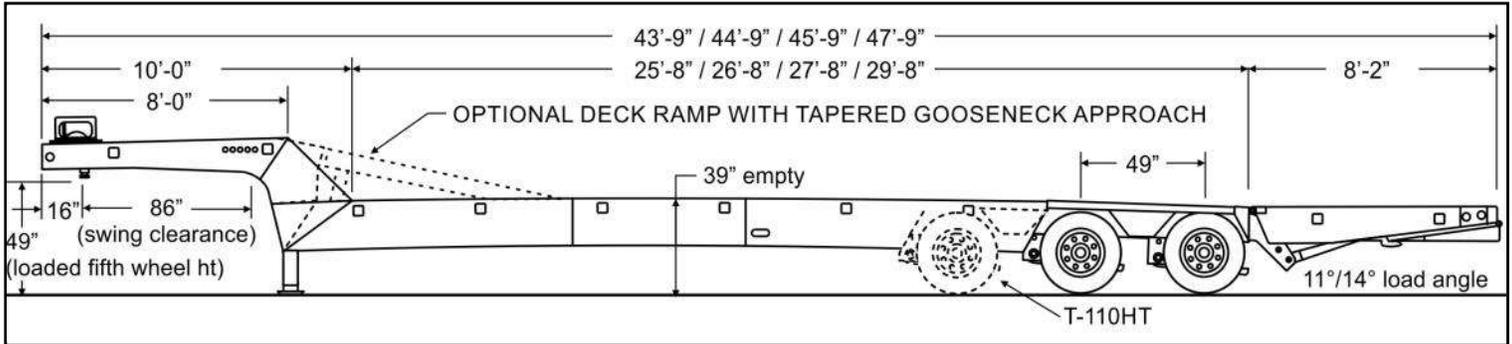

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin
- King pin setting: 16"
- 8'-0" steel top deck with steel slope
- Stake pockets (2 per side)
- (2) Integrated storage trays with lids
- (2) Telescoping parking stands
- 12K Hydraulic Winch, 3/8" x 60' cable, w/tensioner

**FRAME / DECK**

- 102" load width
- 39" deck height (empty)
- Cambered I-beam main frame, 100,000/80,000 psi
- I-beam crossmembers
- Crossmembers 12" on center
- 2" nominal oak wood deck
- Stake pockets on 4'-0" centers

**RAMPS / TAIL**

- 8'-0" hyd. folding tail w/Angelim Pedra wood decking (raised)
- 4'-0" hyd. fold-under section with diamond plate

**AXLES / SUSPENSION**

- Air ride suspension with dump valve
- (2) 25,000 lb. axles
- Tire - 235/75R17.5, load range H
- 17.5" budd wheels, 8-bolt, hub piloted
- Air brakes (sensor on 1 axle, 2S/1M) w/ABS
- Brake size (12.25x7.5)
- Oil bath hubs
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
45,400	85,400	15,400	70,000	102"	45'	\$60,125
45,400	86,040	16,040	70,000	102"	48'	\$63,715
45,400	87,400	17,400	70,000	102"	53'	\$70,350

Subject to F.E.T. – deduct \$23.67 per tire

Effective Date: 8/1/2018

Hydraulic Tail/  
**T-80HT**

**Model:**

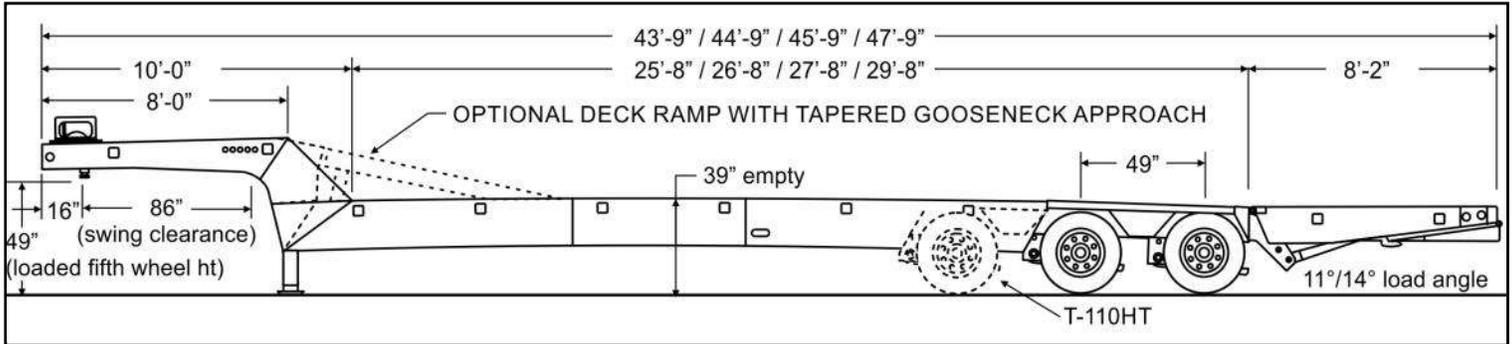

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin
- King pin setting: 16"
- 8'-0" steel top deck with steel slope
- Stake pockets (2 per side)
- (2) Integrated storage trays with lids
- (2) Telescoping parking stands
- 12K Hydraulic Winch, 3/8" x 60' cable, w/tensioner

**FRAME / DECK**

- 102" load width
- 39" deck height (empty)
- Cambered I-beam main frame, 100,000/80,000 psi
- I-beam crossmembers
- Crossmembers 12" on center
- 2" nominal oak wood deck
- Stake pockets on 4'-0" centers

**RAMPS / TAIL**

- 8'-0" hyd. folding tail w/Angelim Pedra wood decking (raised)
- 4'-0" hyd. fold-under section with diamond plate

**AXLES / SUSPENSION**

- Air ride suspension with dump valve
- (2) 25,000 lb. axles
- Tire - 235/75R17.5, load range H
- 17.5" budd wheels, 8-bolt, hub piloted
- Air brakes (sensor on 1 axle, 2S/1M) w/ABS
- Brake size (12.25x7.5)
- Oil bath hubs
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
45,400	95,400	15,400	80,000	102"	45'	\$65,635
45,400	96,040	16,040	80,000	102"	48'	\$69,225
45,400	97,400	17,400	80,000	102"	53'	\$75,860

Subject to F.E.T. – deduct \$23.67 per tire

Effective Date: 8/1/2018

Hydraulic Tail/  
**T-110HT**

**Model:**

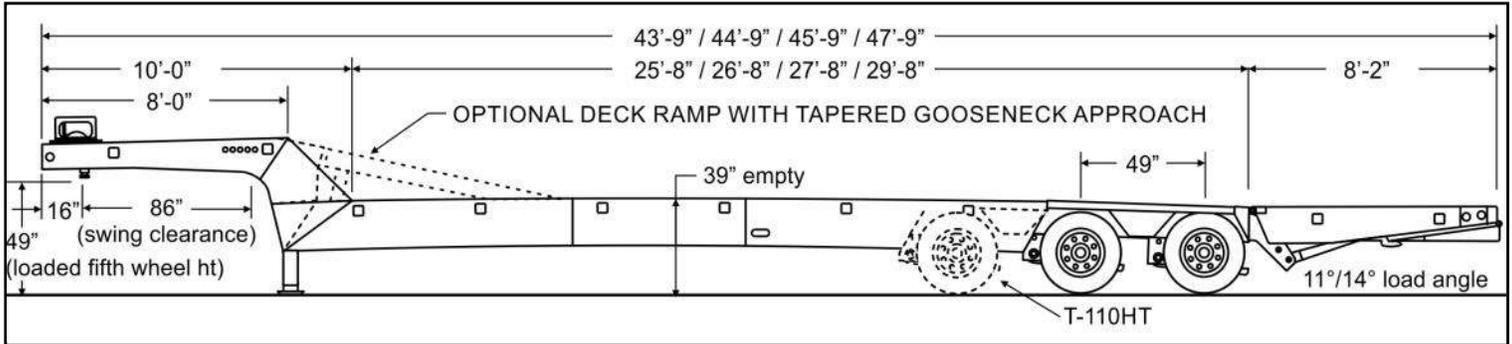

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin
- King pin setting: 16"
- 8'-0" steel top deck with steel slope
- Stake pockets (2 per side)
- (2) Integrated storage trays with lids
- (2) Telescoping parking stands
- 12K Hydraulic Winch, 3/8" x 60' cable, w/tensioner

**FRAME / DECK**

- 102" load width
- 39" deck height (empty)
- Cambered I-beam main frame, 100,000/80,000 psi
- I-beam crossmembers
- Crossmembers 12" on center
- 2" nominal oak wood deck
- Stake pockets on 4'-0" centers

**RAMPS / TAIL**

- 8'-0" hyd. folding tail w/Angelim Pedra wood decking (raised)
- 4'-0" hyd. fold-under section with diamond plate

**AXLES / SUSPENSION**

- Air ride suspension with dump valve
- (3) 25,000 lb. axles
- Tire - 235/75R17.5, load range H
- 17.5" budd wheels, 8-bolt, hub piloted
- Air brakes (sensor on 1 axle, 2S/1M) w/ABS
- Brake size (12.25x7.5)
- Oil bath hubs
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
68,100	127,525	17,525	110,000	102"	45'	<b>\$82,082</b>
68,100	128,165	18,165	110,000	102"	48'	<b>\$85,960</b>
68,100	129,525	19,525	110,000	102"	53'	<b>\$95,660</b>

Subject to F.E.T. – deduct \$23.67 per tire

Effective Date: 8/1/2018

**Detachable Goose-  
T-70DTG**

Model:

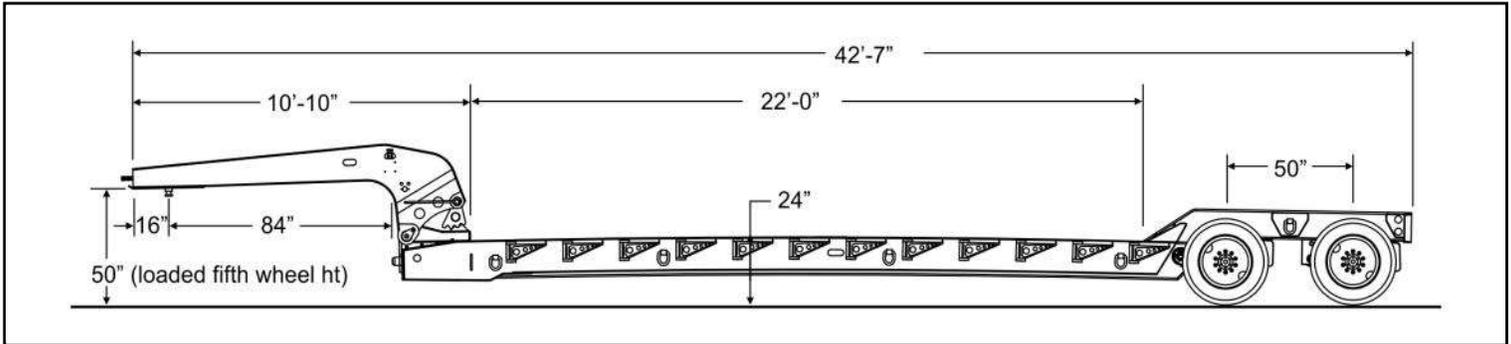

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin, 16" king pin setting
- 50" fifth-wheel height (loaded)
- 10'-10" Gooseneck
- 84" swing clearance
- Mechanical lock (fifth-wheel type), w/ air lock-pin release
- Wet line hydraulic system
- 5-position load blocks
- Gooseneck support arm (hyd)

**FRAME / DECK**

- 22 ft. main deck length, 102" load width
- 24" loaded deck height
- 16" fabricated steel main frame 100,000/80,000 psi
- 10" I-beam crossmembers
- Raised 2" oak wood deck (track only)
- 10 D-ring tie-downs (5/side)
- Std-duty swing-out and HD front doub

**RAMPS / TAIL**

- Half-bolster approach
- Bolsters between wheels
- Open boom well
- 55" axle spread

**AXLES / SUSPENSION**

- Air ride suspension
- (2) 25,000 lb. axles
- Tires - 255/70R22.5, load range H
- 22.5" budd wheels, 10-bolt, hub piloted
- Air brakes (sensor on 1 axle, 2S/1M) w/ABS
- Brake size (16.5x7), Park brakes on all axles
- Automatic slack adjusters
- Oil bath

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
40,560	85,200	15,200	70000	102"	22'	\$58,580
			(16' dist.)			

Subject to F.E.T. – deduct \$18.99 per tire

Effective Date: 8/1/2018

**Detachable Goose-  
T-100DTG**

**Model:**

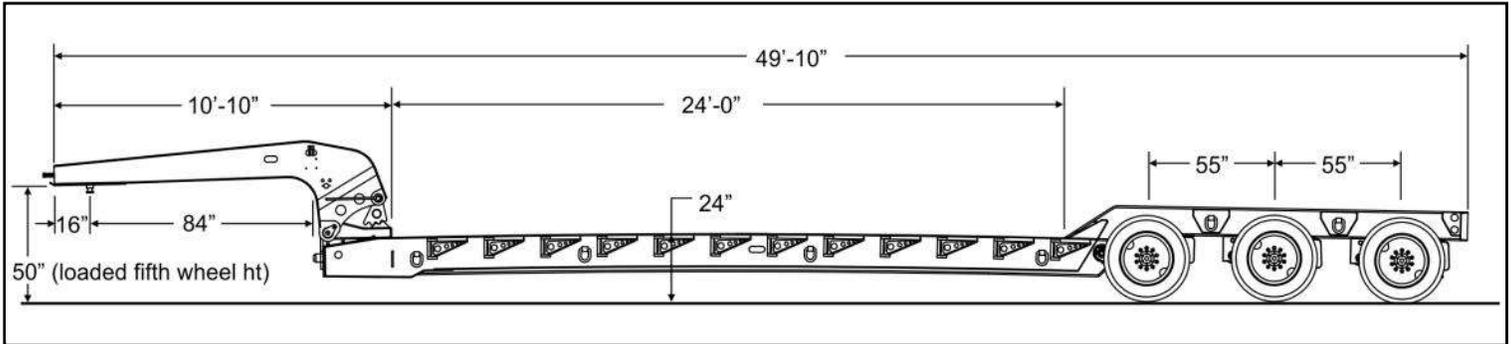

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin, 16" king pin setting
- 50" fifth-wheel height (loaded)
- 10'-10" Gooseneck
- 84" swing clearance
- Mechanical lock (fifth-wheel type), w/ air lock-pin release
- Wet line hydraulic system
- 5-position load blocks
- Gooseneck support arm (hyd)

**FRAME / DECK**

- 24 ft. main deck length, 102" load width
- 24" loaded deck height
- 16" fabricated steel main frame 100,000/80,000 psi
- 10" I-beam crossmembers
- Raised 2" oak wood deck (track only)
- 12 D-ring tie-downs (6/side)
- Std-duty swing-out and HD front doub

**RAMPS / TAIL**

- Half-bolster approach
- Bolsters between wheels
- Open boom well
- 55" axle spread

**AXLES / SUSPENSION**

- Air ride suspension
- (3) 25,000 lb. axles (12 wheels)
- Tires - 255/70R22.5, load range H
- 22.5" budd wheels, 10-bolt, hub piloted
- Air brakes (sensor on 1 axle, 2S/1M) w/ABS
- Brake size (16.5x7), Park brakes on all axles
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
60,840	118,000	18,800	100000	102"	24'	\$76,540
			(16' dist.)			

Subject to F.E.T. – deduct \$18.99 per tire

Effective Date: 8/1/2018

**Detachable Goose-  
T-110DTG**

**Model:**

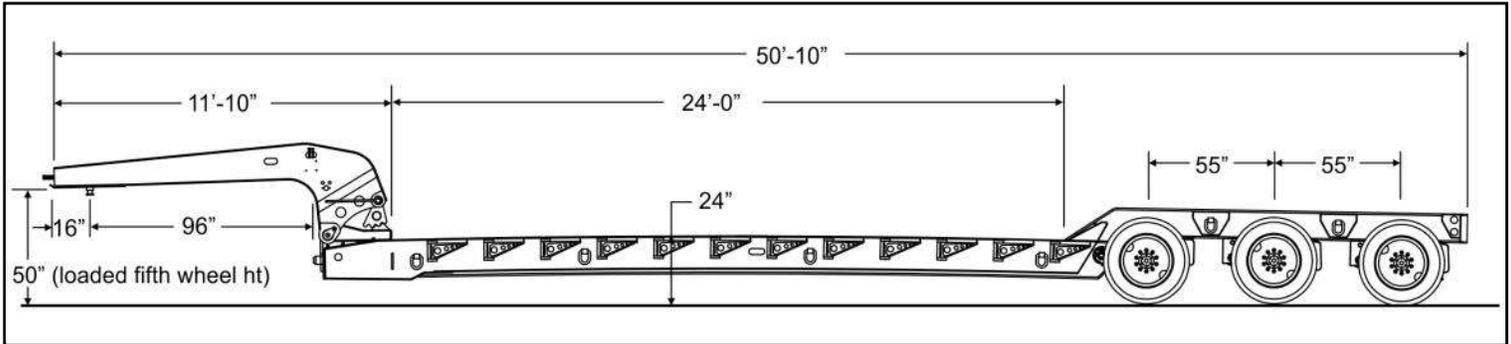

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin, 16" king pin setting
- 50" fifth-wheel height (loaded)
- 11'-10" Gooseneck
- 96" swing clearance
- Mechanical lock (fifth-wheel type), w/ air lock-pin release
- Wet line hydraulic system
- 5-position load blocks
- Gooseneck support arm (hyd)

**FRAME / DECK**

- 24 ft. main deck length, 102" load width
- 24" loaded deck height
- 16" fabricated steel main frame 100,000/80,000 psi
- 10" I-beam crossmembers
- Raised 2" oak wood deck (track only)
- 12 D-ring tie-downs (6/side)
- Hvy-duty swing-out and HD front doub

**RAMPS / TAIL**

- Half-bolster approach
- Bolsters between wheels
- Open boom well
- 55" axle spread

**AXLES / SUSPENSION**

- Air ride suspension
- (3) 25,000 lb. axles (12 wheels)
- Tires - 255/70R22.5, load range H
- 22.5" budd wheels, 10-bolt, hub piloted
- Air brakes (sensor on 1 axle, 2S/1M) w/ABS
- Brake size (16.5x7), Park brakes on all axles
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
60,840	129,500	19,160	110000	102"	24'	<b>\$80,780</b>
			(16' dist.)			

Subject to F.E.T. – deduct \$18.99 per tire

Effective Date: 8/1/2018

**Detachable Goose-  
T-120DTG**

**Model:**

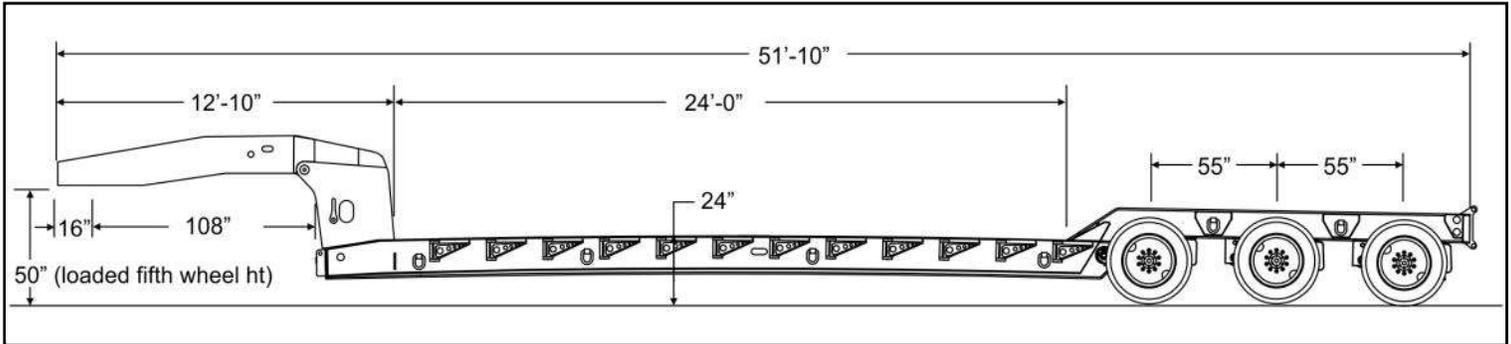

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin, 16" king pin setting
- 50" fifth-wheel height (loaded)
- 12'-10" Gooseneck
- 108" swing clearance
- Positive air lock w/air lock-pin release
- Wet line hydraulic system
- Adjustable transport doors
- Gooseneck support arm (hydraulic)

**FRAME / DECK**

- 24 ft. main deck length, 102" load width
- 24" loaded deck height
- 16" fabricated steel main frame 100,000/80,000 psi
- 10" I-beam crossmembers
- Raised 2" oak wood deck (track only)
- 12 D-ring tie-downs (6/side)
- Hvy-duty swing-out and HD front doub

**RAMPS / TAIL**

- Half-bolster approach
- Bolsters between wheels
- Open boom well
- 55" axle spread

**AXLES / SUSPENSION**

- Air ride suspension
- (3) 25,000 lb. axles
- Tires - 275/70R22.5, load range H
- 22.5" budd wheels, 10-bolt, hub piloted
- Air brakes w/o ABS (ABS not required, but recommended)
- Brake size (16.5x7), Park brakes on all axles
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details


*Weights and capacities vary depending upon options. Published weights are reference only.						
GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
60,840	140,000	20,000	120000	102"	24'	\$91,255
			(16' dist.)			

Subject to F.E.T. – deduct \$18.99 per tire

Effective Date: 8/1/2018

Jeep/  
**T-80J**

Model:

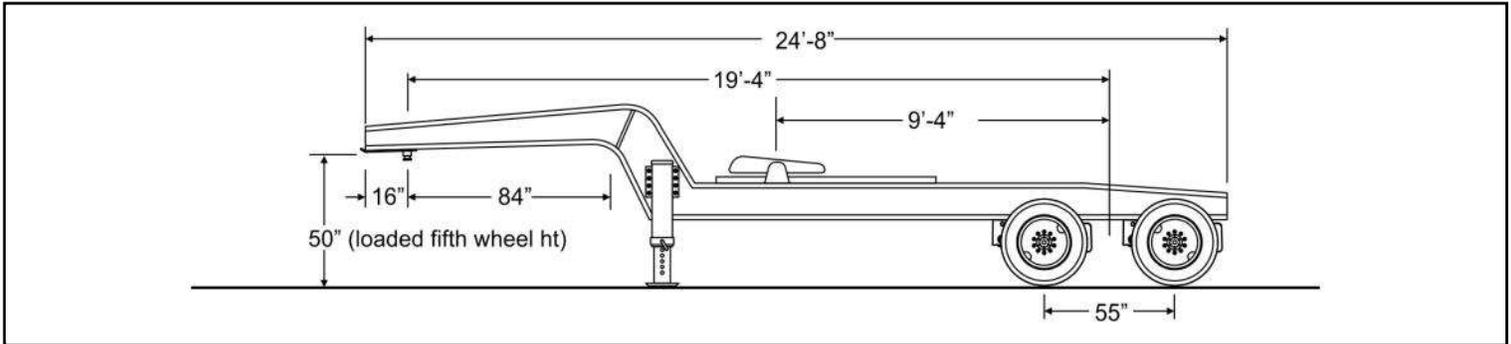

All dimensions are nominal. Illustration may be shown with optional equipment.

**STANDARD FEATURES**

**HITCH / TONGUE**

- 2" king pin
- 16" king pin setting
- 50" fifth-wheel height (loaded)
- 84" swing clearance
- Telescoping pin-type parking stands

**FRAME / DECK**

- 96" width
- 16" fabricated steel main frame 100,000/80,000 psi
- 10" I-beam crossmembers
- 41" sliding fifth-wheel

**RAMPS / TAIL**

N/A

**AXLES / SUSPENSION**

- Air ride suspension
- (2) 25,000 lb. axles
- Tires - 255/70R22.5, load range H
- 22.5" budd wheels, 10-bolt, hub piloted
- Air brakes, no ABS (ABS not required, but recommended)
- Brake size (16.5x7), Park brakes on all axles
- Automatic slack adjusters

**LIGHTS / WIRING**

- Rubber grommet mounted LED lights
- Sealed modular wiring

**STANDARD FEATURES**

- Limited Lifetime Frame Warranty\*
- One-Year full Warranty\*
- Weatherproof registration holder
- Media blasted
- Two-component polyurethane primer and paint
- Trailer color: Equipment Black
- Suspension dump valve with gauge

\*See web site for warranty details

\*Weights and capacities vary depending upon options. Published weights are reference only.

GAWR (lbs)	GVWR (lbs)	WEIGHT (lbs)	CAPACITY (lbs)	DECK WIDTH (in)	DECK LENGTH (ft)	MSRP
50,000	95,000	7,500	80,000	N/A	N/A	\$38,125

Subject to F.E.T. – deduct \$18.99 per tire



## RG Deck-Over Options

- Effective: 1/18

Description	50RG	70RG	MSRP
<b>TONGUE / HITCH</b>			
30-degree sloped gooseneck	•	•	\$1,875
Integrated dual storage trays with lids	•	•	\$495
<b>MAIN DECK</b>			
Additional deck length (up to 34 ft. total deck length), priced per foot-call for additional	•	•	\$480
Additional D-rings or stake pockets (each)	•	•	\$35
Rub rail with stake pockets in lieu of D-rings (per foot of deck length)	•	•	\$50
12K Electric winch (includes 125 ft. x 3/8" cable, corded remote, wiring to rear of truck)	•	•	\$2,690
Battery Kit w/charger for bifold ramp or electric over hydraulic ramp (installed)	•	•	\$565
Battery Kit w/charger for winch (installed)	•	•	\$515
Apitong wood deck (per linear foot)	•	•	\$65
Sliding winch track (per foot) – curb side standard	•	•	\$40
Sliding winch, 4" for winch track (each)	•	•	\$45
Winch for cargo straps (each - P/N 37-2023) – welded on, curb side standard, 4"	•	•	\$55
4" x 30 ft. cargo straps with flat hook (each)	•	•	\$35
<b>SUSPENSION</b>			
Sensors on 2 axles (4S/2M)	•	•	\$690
25K axle upgrade (per axle)	•	•	\$225
Air Ride Suspension, 22.5K (includes dump valve), raises deck height 1.5"	•	•	\$3,400
Spare tire mounting bracket, mounted on gooseneck	•	•	\$160
Spare tire and wheel, 215/75R17.5, load range H	•	•	\$525
22.5 wheel/brake option (includes 255/70R22.5 tire, 10-bolt wheels, 16.5x7 air brakes)		•	\$1,430
Tire upgrade, 235/75R17.5 (ea)	•		\$55
<b>RAMPS</b>			
Wood filled beavertail in lieu of angle iron	•	•	\$185
5-foot angle-iron beavertail		•	\$395
6-foot angle-iron beavertail	•	•	\$465
Double-Break Beavertail (7'-6") with 6-foot spring-assist ramps	•	•	\$875
Bucket well in beavertail	•	•	\$660
Third ramp	•	•	\$555
6-foot steel cleated ramps	•	•	\$175
6-foot wood filled ramps	•	•	\$320
5 ft. wood filled ramps in lieu of angle iron	•	•	\$180
6'-0" aluminum ramps to load top deck (17-degree load angle)	•	•	\$1,525
Upper deck ramp storage for aluminum ramps (under top deck)	•	•	\$395
Air operated ramps, 5'x22", steel cleat or wood top	•	•	\$2,995
Air operated ramps, 5'x36", steel cleat or wood top	•	•	\$3,265
Air operated ramps, 6'x22", steel cleat or wood top	•	•	\$3,145
Air operated ramps, 6'x36", steel cleat or wood top	•	•	\$3,415
Elec-over-hyd option, in lieu of air operated (add to air operated price)	•	•	\$475
Bi-fold ramps, elec-over-hyd, 11' at 9°, includes 6' at 8° wood filled beavertail (26' min. deck length required)	•	•	\$8,890
<b>OTHER</b>			
Special color (no metallic) – color match only – ramps painted to match	•	•	CALL
2 chock blocks and holder mounted curb side under deck ahead of wheels	•	•	\$220
Galvanizing	•	•	CALL
Trailer color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal	•	•	N/C
Change ramp color to black	•	•	N/C
Change ramp color to yellow, blue, charcoal	•	•	N/C



Description	HT Deck-Over Options			- Effective: 1/18
	70HT	80HT	100HT	MSRP
<b>UPPER DECK</b>				
Deduct for no winch	•	•	•	-\$1,875
20K Hyd. Winch w/Cable ILO	•	•	•	\$2,295
Winch guard	•	•	•	\$550
Winch roller (recessed)	•	•	•	\$425
Winch mounted in slope of upper deck	•	•	•	\$1,250
Wireless remote (winch only)	•	•	•	\$1,550
Corded remote control (winch only)	•	•	•	\$1,510
6-function wireless remote (with manual handles)	•	•	•	\$3,495
Self-contained hydraulic unit – 12HP (mounted above winch)	•	•	•	\$4,450
Self-contained hydraulic unit – 20HP (mounted above winch)	•	•	•	\$5,920
Dual Hydraulics	•	•	•	\$725
Cover for Self-contained hydraulic unit	•	•	•	\$850
2-Speed 25K parking jacks (crank curb side)	•	•	•	\$885
Dual hydraulic controls	•	•	•	\$825
<b>DECK RAMPS</b>				
6' hyd. recessed deck ramp (12" narrower than deck) not available on double drop deck w/tapered upper deck	•	•	•	\$4,210
8' hyd. recessed deck ramp (12" narrower than deck) not available on double drop deck w/tapered upper deck	•	•	•	\$4,495
Ladder style ramps 7'-0" x 20"	•	•	•	\$1,655
Wood filled ramps 7'-0" x 20"	•	•	•	\$1,870
Star traction ramps over steel 7'-0" x 20"	•	•	•	\$2,815
Bracket (only) for ramps	•	•	•	\$425
<b>MAIN DECK</b>				
Additional deck length per foot (Max 2 ft.)	•	•	•	\$995
Concentrated load in 10' (50,000 on 35-ton model, 70,000 on 55-ton model)	•	•	•	\$1,795
Cross members 8" on center on main deck	•	•	•	\$755
Double drop deck, 6" drop approximately 10-degree angle	•	•	•	\$3,425
Double drop deck, 12" drop approximately 12-degree angle	•	•	•	\$3,845
Stake pockets 24" centers	•	•	•	\$710
Additional D-Rings (each)	•	•	•	\$40
Recessed D-rings (each)	•	•	•	\$75
Stake pockets (each)	•	•	•	\$65
Key-slots (each)	•	•	•	\$50
1/4" floor plate over wheels only (3/16" is standard)	•			\$475
1/4" floor plate over wheels only (3/16" is standard)		•	•	\$680
Star traction over wood on main hydraulic tail	•	•	•	\$1,210
1/4" floor plate over fold-under section (3/16" is standard)	•	•	•	\$705
Star traction over steel on fold-under section only	•	•	•	\$415
Traction aids on steel tail on outside 28" with wood center	•	•	•	\$795
Tread-plate over wood	•	•	•	\$1,950
Apitong decking, 1.5" thickness (per foot)	•	•	•	\$65
9' deck width	•	•	•	\$1,425
10' deck width		•	•	\$5,510
12" swing-out outriggers without planks – 44'		•	•	\$3,120
12" swing-out outriggers without planks – 45'		•	•	\$3,305
12" swing-out outriggers without planks – 46'		•	•	\$3,460
12" swing-out outriggers without planks – 48'		•	•	\$3,825

HT Options Continued ———>



<b>HT Deck-Over Options</b>		- Effective: 1/18			
Description	70HT	80HT	100HT	MSRP	
<b>SUSPENSION</b>					
3rd axle on air ride suspension (must add air ride for trailer also)	●			\$8,950	
22.5 wheel and brake option, includes 255/70Rx22.5 tires, 10-bolt wheels, 16.5x7 air brakes (41" deck height)	●			\$1,430	
22.5 wheel and brake option, includes 255/70Rx22.5 tires, 10-bolt wheels, 16.5x7 air brakes (41" deck height)			●	\$2,145	
Wheel, steel – 6.75x17.5 x 8-bolt – each (without tire)	●	●	●	\$158	
Wheel, steel – 8.25x22.5 x 10-bolt – each (without tire)	●	●	●	\$180	
Wheel, machined aluminum – 6.75x17.5 x 8-bolt – each (without tire) ILO steel	●	●	●	\$295	
Wheel, machined aluminum – 8.25x22.5 x 10-bolt – each (without tire) ILO steel	●	●	●	\$325	
Wheel, polished aluminum – 6.75x17.5 x 8-bolt – each (without tire) ILO steel	●	●	●	\$330	
Wheel, polished aluminum – 8.25x22.5 x 10-bolt – each (without tire) ILO steel	●	●	●	\$365	
Spare tire and wheel (steel), 6.75x22.5x8-bolt, 235/75Rx17.5 tire	●	●	●	\$475	
Cat's Eye Tire Equalization System (per complete axle)	●	●	●	\$295	
Digital Air Weigh Scale System	●	●	●	\$2,295	
Dual Dynamics Tire Equalization System (per complete axle)	●	●	●	\$275	
PSI Tire Inflation System for single axle	●	●	●	\$1,460	
4S/2M ABS option	●	●	●	\$725	
Raise/Lower Kit, 9" ride height (approx.. 4" up and 4" down)	●	●	●	\$695	
<b>RAMPS</b>					
6' aluminum incline assist ramps (for tail)	●	●	●	\$3,825	
8' aluminum incline assist ramps (for tail)	●	●	●	\$4,015	
<b>OTHER</b>					
Special color (no metallic) – color match only – ramps painted to match	●	●	●	CALL	
Trailer color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal	●	●	●	N/C	
4-pole female electrical socket wired to clearance light in light channel	●	●	●	\$55	
Additional socket for remote at front of trailer	●	●	●	\$130	
Side clearance lights (per pair)	●	●	●	\$95	
Mid-ship turn signals	●	●	●	\$115	
3rd taillight package	●	●	●	\$260	
Air Lift Front Axle		●	●	\$1,625	
Strobe light kits	●	●	●	\$685	
Flag holders (pair)	●	●	●	\$70	
Liquid filled air pressure gauge	●	●	●	\$145	
Brackets only for removable oversized load sign	●	●	●	\$225	



Description	DTG Options				MSRP
	70	100	110	120	
- Effective: 1/18					
<b>GOOSENECK</b>					
5th Wheel style Gooseneck	•	•	•		\$695
11'-10" (96" swing clearance) – based on 84"	•	•			\$1,295
12'-10" (108" swing clearance) – based on 84"		•	•	•	\$1,535
13'-4" (114" swing clearance) – based on 84"		•	•	•	\$2,995
18'-0" gooseneck with dual king pin settings (16" and 40")				•	\$10,915
5'-0" Flip neck option for 18'-0" gooseneck – 16" king pin setting				•	\$2,710
Fenders for gooseneck (aluminum)	•	•	•	•	\$1,495
Removable two-position king pin (use with 11'-10" and longer gooseneck) set at 16" and (specify)	•	•	•	•	\$695
Aluminum toolbox (lockable) in gooseneck	•	•	•	•	\$910
Chain/tool storage tray in gooseneck – bolt-on	•	•	•	•	\$395
Lockable lid for storage tray	•	•	•	•	\$110
Gooseneck upper deck (wood-decked) welded on	•	•	•	•	\$4,465
<b>HYDRAULICS</b>					
Self-contained hydraulic kit with 12HP Honda engine	•	•	•	•	\$3,495
Dual hydraulic system (wet line / self-contained)	•	•	•	•	\$725
<b>MAIN DECK</b>					
Load concentration in 10' (35-ton model)	•				\$1,095
Load concentrated in 10' (under 25' only)		•	•	•	\$2,175
Low deck option – 20" load height	•	•	•		\$2,125
Low Deck Option – 18" load height	•	•	•		\$3,395
Tapered deck option w/24" load height	•	•	•	•	\$5,500
Tapered deck option w/20" load height	•	•	•		\$7,800
Standard deck add'l deck length per foot ( up to 26' max) (call for more)	•	•	•	•	\$890
Low deck - add'l deck length/ft (up to 26' max)	•	•	•	•	\$970
9'-0" wide deck (deck only)	•				\$1,195
9'-0" wide deck and trunnion	•	•	•	•	\$2,550
10'-0" wide deck and trunnion	•	•	•	•	\$5,995
5" drop sides (fixed approach only)	•	•	•	•	\$4,260
Chain/tool storage (bolt-on)	•	•	•	•	\$395
Lockable lid for storage tray	•	•	•	•	\$120
Center filled 2" Full oak deck – per foot	•	•	•	•	\$45
Center filled 2" Apitong – per foot	•	•	•	•	\$70
Outrigger deduct 22 ft. deck	•				-\$600
Outrigger deduct 24 ft. deck	•	•	•	•	-\$730
Heavy-duty outriggers in lieu of standard - each	•	•			\$55
Heavy-duty outriggers (no brackets) – each	•	•	•	•	\$148
Outrigger brackets – each	•	•	•	•	\$51
Apitong outrigger boards in lieu of oak	•	•	•	•	\$330
Apitong decking in lieu of oak –not in center deck (per foot)	•	•	•	•	\$65
Side rail stiffeners	•	•	•	•	\$710
Deck boom well (open, 3 crossmembers)	•	•	•	•	\$795
Bucket plate	•	•	•	•	\$520
Additional D-style lashing rings (each)	•	•	•	•	\$40
Key slot cut-outs on outer side rail (each)	•	•	•	•	\$50
4" Junior I-Beam crossmembers, outer rails only – per pair	•	•	•	•	\$41

DTG Options Continued ----->



Description	DTG Options				MSRP
	70	100	110	120	
- Effective: 1/18					
<b>RAMPS</b>					
Front ramps (42"), steel, pin-up	•	•	•	•	\$885
Front center ramp – standard length, steel	•	•	•	•	\$510
Rear folding spring-assist manual ramp, 5 ft. long, pair (beavertail required)	•	•	•		\$1,630
Front fixed approach ramps in lieu of front flip	•	•	•	•	\$695
Front flip-up approach ramps, DEDUCT	•	•	•	•	-\$460
<b>SUSPENSION</b>					
Beavertail, 36" with track bars @ 17deg., adds 14" to overall length	•	•	•		\$925
Raised wheel covers (bolt-on), price per axle	•	•	•	•	\$1,585
Full length wheel covers, tandem (welded on)	•				\$2,725
Full length wheel covers, triple (welded on)		•	•	•	\$3,585
Boom well cover tray, tandem	•				\$485
Boom well cover tray, triple		•	•	•	\$585
Full width rear deck – steel, tandem	•				\$3,150
Full width rear deck – wood, tandem	•				\$3,650
Full width rear deck – steel, triple		•	•	•	\$3,240
Full width rear deck – wood, triple		•	•	•	\$3,770
3 ft. slope ahead of axles at 24 degrees (adds 14" onto length)	•	•	•	•	\$2,470
4 ft. slope ahead of axles at 18 degrees (add 26" onto length)	•	•	•	•	\$3,660
Frame reinforcement for flip axle (includes brackets)		•	•		\$1,195
Frame reinforcement for flip axle (includes brackets)		•	•		\$2,245
Frame reinforcement for single booster (includes brackets)		•	•		\$1,620
Frame reinforcement for single booster (includes brackets)				•	\$2,650
Frame reinforcement for tandem booster (includes brackets)				•	\$4,910
4th fixed axle			•		\$12,450
4th fixed axle				•	\$12,650
<b>BOOSTER / FLIP AXLE</b>					
14'-1" single axle booster extension only for use with flip axle (frame reinforcement required) (14'-1" measured center of rear trailer axle to first booster axle)			•	•	\$12,810
14'-1" tandem axle booster extension only for use with two flip axles (frame reinforcement required) (14'-1" measured center of rear trailer axle to first booster axle)				•	\$21,250
14'-1" single axle booster (frame reinforcement required) (14'-1" measured center of rear trailer axle to first booster axle) – with fixed axle			•	•	\$24,995
14'-1" tandem axle booster (frame reinforcement required) (14'-1" measured center of rear trailer axle to first booster axle) – with fixed axle				•	\$41,995
Flip axle (single axle)		•	•	•	\$13,050
Flip axle in lieu of fixed third axle		•	•	•	\$2,275

DTG Options Continued ----->



Description	- Effective: 1/18				MSRP
	70	100	110	120	
<b>DTG Options</b>					
<b>SUSPENSION</b>					
55" spread axles – adds to overall length	•				\$575
60" spread axles (T-70) – adds to overall length	•				\$870
60" spread axles (T-100,110) – adds to overall length		•	•		\$1,255
60" spread axles (T-120) – adds to overall length				•	\$2,110
Lift axle (rear)		•	•	•	\$1,625
Raise/lower kits, 9" ride height (approx. 4" up and 4" down)	•	•	•	•	\$695
Manual ride height control valve	•	•	•	•	\$310
2S/2M ABS system				•	\$1,575
Sensors on 2 axles – 4S/2M	•	•	•		\$695
4S/2M ABS system				•	\$2,025
Wheel, steel - 8.25 x 22.5 x 10-bolt - each (without tire)	•	•	•	•	\$180
Wheel, machined aluminum - 8.25 x 22.5 x 10-bolt - each (without tire) ILO steel	•	•	•	•	\$325
Wheel, polished aluminum - 8.25 x 22.5 x 10 bolt - each (without tire) ILO steel	•	•	•	•	\$365
Tire – 255/70Rx22.5, load range H – 16 ply – each (tire only)*	•	•	•		\$380
Tire – 275/70Rx22.5, load range H – 16 ply – each (tire only)*	•	•	•	•	\$545
Spare tire and wheel (steel), 8.25x22.5x10-bolt, 255/70Rx22.5 tire*	•	•	•		\$610
Spare tire and wheel (steel), 8.25x22.5x10-bolt, 275/70Rx22.5 tire*	•	•	•	•	\$775
Cat's Eye Tire Equalization System (per complete axle)	•	•	•	•	\$230
Digital Air Weigh Scale System	•	•	•	•	\$1,995
Scale-O-Matic SM 140	•	•	•	•	\$290
Dual Dynamics Tire Equalization System (per complete axle)	•	•	•	•	\$275
PSI Tire Inflation System (per axle)	•	•	•	•	\$1,340
<b>OTHER</b>					
Special color (no metallic) – color match only	•	•	•	•	CALL
Trailer color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal	•	•	•	•	N/C
LED strobe light kit – switched and mounted (trailer only)	•	•	•	•	\$685
Battery pack w/flasher for marker lights	•	•	•	•	\$410
*Subject to F.E.T.: 255/70Rx22.5 deduct \$18.99 per tire 275/70Rx22.5 deduct \$32.51 per tire					



## Jeep Options

- Effective:

Description	MSRP
<b>GOOSENECK</b>	
Fenders for gooseneck (aluminum)	\$1,495
Aluminum toolbox (lockable) in gooseneck	\$910
Chain/tool storage tray in gooseneck – bolt-on	\$395
Lockable lid for storage tray	\$110
<b>MAIN DECK</b>	
8’-6” width option	\$630
9’-0” width option	\$895
Flag holders	\$75
<b>SUSPENSION</b>	
60” axle spacing	\$795
Raise/lower kit, 9” ride height (approx. 4” up and 4” down)	\$695
Manual ride height control valve	\$310
2S/1M ABS system	\$1,575
4S/2M ABS system	\$2,025
Wheel, steel - 8.25 x 22.5 x 10-bolt - each (without tire)	\$180
Wheel, machined aluminum - 8.25 x 22.5 x 10-bolt - each (without tire) ILO	\$325
Wheel, polished aluminum - 8.25 x 22.5 x 10 bolt - each (without tire) ILO	\$365
Tire – 255/70Rx22.5, load range H – 16 ply – each (tire only)	\$380
Tire – 275/70Rx22.5, load range H – 16 ply – each (tire only)	\$545
Cat’s Eye Tire Equalization System (per complete axle)	\$230
Dual Dynamics Tire Equalization System (per complete axle)	\$275
PSI Tire Inflation System (per axle)	\$1,340
<b>OTHER</b>	
Special color (no metallic) – color match only – ramps painted to match	CALL
Trailer color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal	N/C

This page left blank.

This page left blank.

This page left blank.



## **Monroe Towmaster, LLC.**

**61381 US Hwy 12  
Litchfield, MN 55355**

**Phone: 320-693-7900**

Toll Free: 800-462-4517

Fax: 320-693-7921

•

### **Parts Department**

**Phone: 320-593-4595**

Toll Free: 866-239-2221

Fax: 320-693-5703

•

### **Shipping Department**

**Phone: 320-593-4554**

Toll Free: 800-642 0742

Fax: 320-693-2047

•

[towmaster.com](http://towmaster.com)