


PREPARED BY
HIGHWAY PLANNING SURVEY
IN COOPERATION WITH
U. S. PUBLIC ROADS ADMINISTRATION


STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 6806
TRUNK HIGHWAY 89
COUNTY Roseau
DISTRICT 2B

LIMITS: S. Co. Line - Jct. T.H. 11 (Jct. T.H. 310) at Roseau

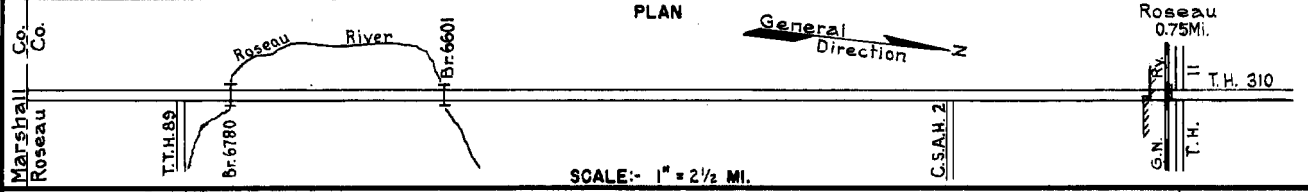

| YEAR BUILT | PROJECT N° | DESCRIPTION | | | CODE N° DIST. |
|------------|------------|-----------------------------------|--------------------------------------|------------------|--|
| | | TYPE | WIDTH | THICKNESS | |
| | | Earth Br.X-426, X-427, X-428 | 18' 16'6" | | No Record of Constr. Added in 1934. 22' B.S., 24' B.S. & 24' B.S. |
| | | Gravel Br.X-429 & 447 | 24' 24' | 1" 2" | No Record of Constr. Added in 1934. 19' W.T. & 8' B.S. |
| 1925 | | Grading Gravel Br. 107 | 24' 24' | 2 1/2" 2 1/2" | Co. Job 2501. Added in 1934. 1200 C.Y./Mi. 10' B.S. |
| 1928 | | Grading Gravel | 24' 24' | 2 1/2" 2 1/2" | Co. Job 2804 A & B. 1300 C.Y./Mile. Added in 1934. |
| 1929 | | Grading Gravel Br.X-432 | 24' 24' | 2 1/2" 16' | Co. Job 2906. Added in 1934. 1200 C.Y./Mi. 30' Steel A Truss. |
| 1935 | | Br.X-428 | 24' | | Br. Widening. 24' B.S. Maint. Dept. |
| 1935 | | Br.X-425, X-426, X-427, 482 & 409 | 24' 23' | | Maint. Dept. 20' B.S., 24' B.S. 20' B.S., 20' B.S. & 30' B.S. |
| | | Gravel | 20' | 2" | No Record of Constr. Taken over from County in 1937. |
| M | 1940 | A.F.E. 32 | Spot Graveling | | 97 C.Y./Mi. Maint. Dept. |
| M | 1941 | A.F.E. 49 | Spot Graveling Grade Lift (Spots) | 24' | 100 C.Y./Mi. Maint. Dept. |
| M | 1942 | A.F.E. 6 | Regraveling | | 356 C.Y./Mi. Maint. Dept. |
| C | 1942 | A.F.E. 24 | 4-Culverts | | 2-36" X 20' & 2-36" X 18. |
| M | 1943 | A.F.E. 6 | Grav. Resurface (Spots) | | 232 C.Y./Mi. Maint. Dept. |
| M | 1944 | A.F.E. 6 | Grav. Resurfacing (Spots) | | 63 C.Y./Mi. Maint. Div. |

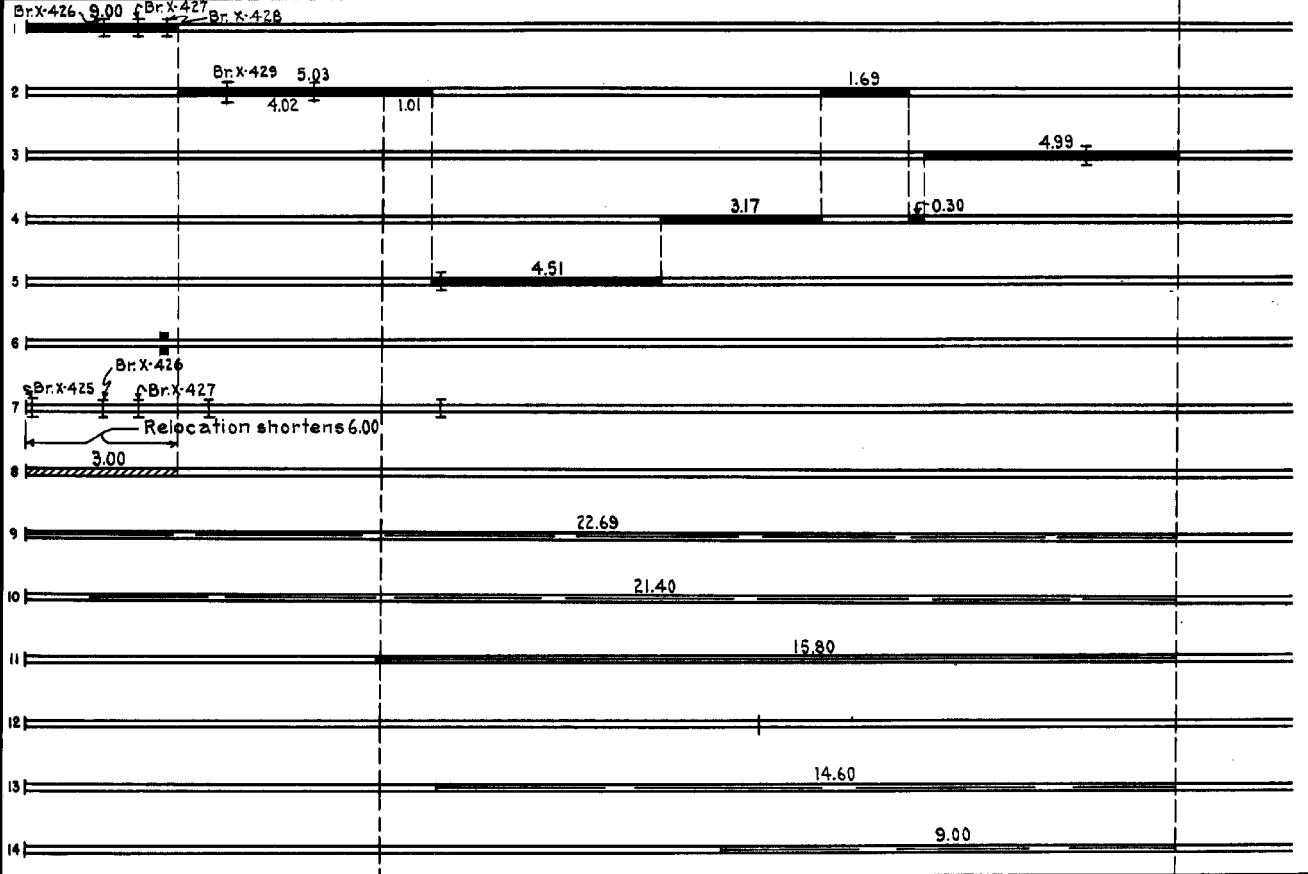

| YEARS | | TOTAL MILES | UNINCORPORATED | | INCORPORATED | | RURAL | | URBAN | |
|-------|------|-------------|----------------|---------|--------------|---------|-----------|---------|-----------|---------|
| FROM | TO | | RDWY. MI. | BR. MI. | RDWY. MI. | BR. MI. | RDWY. MI. | BR. MI. | RDWY. MI. | BR. MI. |
| 1934 | 1936 | 28.65 | 27.92 | 0.02 | 0.75 | 0.00 | 27.92 | 0.02 | 0.75 | 0.00 |
| 1937 | 1946 | 22.69 | 21.93 | 0.01 | 0.75 | 0.00 | 21.93 | 0.01 | 0.75 | 0.00 |
| 1947 | 1959 | 21.92 | 21.91 | 0.01 | 0.00 | 0.00 | 21.91 | 0.01 | 0.00 | 0.00 |
| 1960 | 1960 | 21.92 | 21.85 | 0.01 | 0.06 | 0.00 | 21.85 | 0.01 | 0.06 | 0.00 |
| 1961 | 1963 | 21.92 | 21.87 | 0.01 | 0.04 | 0.00 | 21.87 | 0.01 | 0.04 | 0.00 |
| 1964 | 1971 | 21.92 | 21.81 | 0.01 | 0.10 | 0.00 | 21.81 | 0.01 | 0.10 | 0.00 |
| 1972 | 1972 | 21.92 | 21.16 | 0.01 | 0.75 | 0.00 | 21.16 | 0.01 | 0.75 | 0.00 |


REMARKS: Layout is to scale as of 1937

PREPARED BY
HIGHWAY PLANNING SURVEY
IN COOPERATION WITH
U.S. PUBLIC ROADS ADMINISTRATION


STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 6806
TRUNK HIGHWAY 89
COUNTY Roseau
DISTRICT 28

LIMITS: S. Co. Line - Jct. T.H. 11 (Jct. T.H. 310) at Roseau

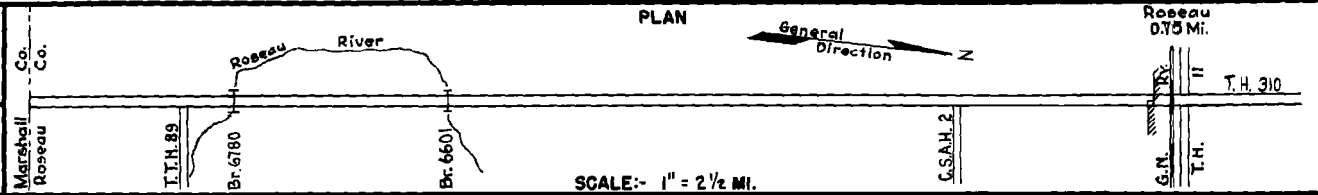

| YEAR BUILT | PROJECT N ^o | DESCRIPTION | | | CODE N ^o DIST. |
|------------|------------------------|-------------------------------|------------|-----------|---|
| | | TYPE | WIDTH | THICKNESS | |
| M | 1945 A.F.E. 6 | Grav. Resurfacing (Spots) | | | 198 C.Y. / Mi. Maint. Div. |
| C | 1947 6806-02 | Grading | 32' | | Extend W104 & W106 |
| | 6806-04 | Stab. Gravel | 52' 9"-12" | | Const. C106, C105 & 6x4 Tr. Timb. Culv. 946 |
| C | 1948 A.F.E. 19 | Bit. Surfacing (Mixed Prime) | 24' | 1" | SC3, 162161 Gal. Agg. 10513 C.Y. |
| C | 1949 6806-05 | Br. 6601 | 30' | | 35 C.D.G. 1247 |
| | A.F.E. 34 | Br. Approaches | | | |
| M | 1949 A.F.E. 4 | Bit. Fog Seal | | | RCS-0, 19635 Gal. Agg. 344 C.Y. |
| M | 1970 A.F.E. 6 | Gravel Resurfacing | | | 3772 Tons |
| M | 1951 A.F.E. 4 | Bit. Fog Seal | 24' | | RCS-1, 19140 Gal. Agg. 636 C.Y. |
| C | 1951 6806-07 | Grading & C66D Culv. | 28' | | 12' Granular Mat'l. 3351 |
| | 6806-08 | Gravel | 28' | 2" | 1200 C.Y./Mi. 3351 |
| | (1) | Br. 6780 | 30' | | 30' B.S. 3351 |
| M | 1952 A.F.E. 4 | Spot Treat. Bit. Surf. Repair | | | SC3, 9553 Gal. Agg. 600 C.Y. |
| C | 1952 6806-09 | Mixed Bit. | 26' | 1 1/2" | 1952 |
| M | 1953 A.F.E. 604 | Bit. Surf. Repair | 24' | | SC3 & RC2, 27150 Gal. Agg. 1713 Tons |
| | A.F.E. 605 | Light Bit. Seal (702 M) | 24' | | (Repair Mi. Pt. 500-700) |
| M | 1954 A.F.E. 605 | Light Bit. Seal | 24' | | RCS-2, 19365 Gal. Agg. 140 C.Y. |
| M | 1956 A.F.E. 604 | Bit. Surf. Repair | 24' | | SC-3, 105075 Gal. Agg. 7843 Tons |
| C | 1960 6806-11 | Gravel Base Plant Mix Bit. | 28' 6"-9" | 1 1/2" | 1364 Tons Bit. Mat'l 752 |

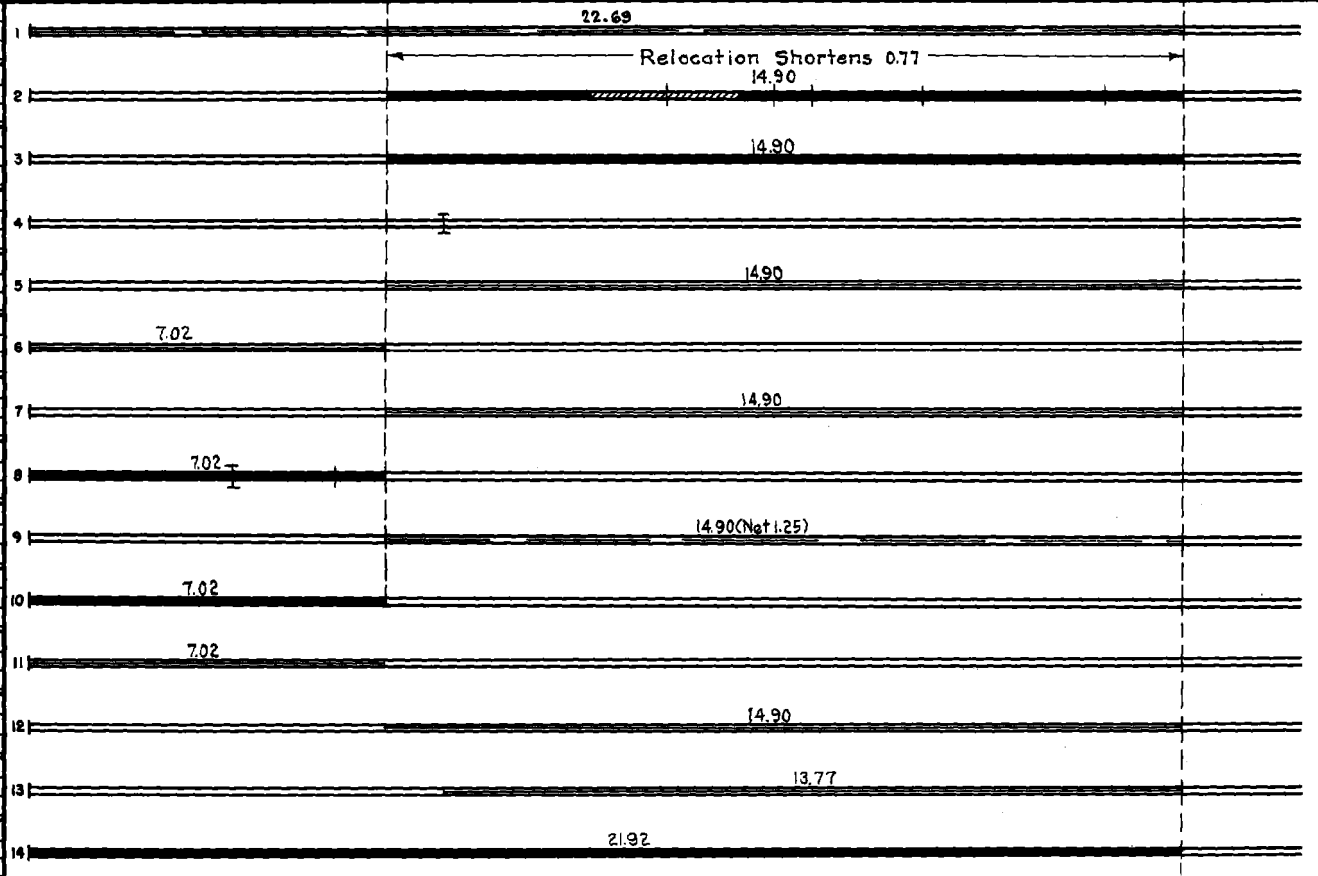

| YEARS FROM TO | | TOTAL MILES | UNINCORPORATED RDWY. MI. BR. MI. | | INCORPORATED RDWY. MI. BR. MI. | | RURAL RDWY. MI. BR. MI. | | URBAN RDWY. MI. BR. MI. | |
|---------------|--|-------------|----------------------------------|--|--------------------------------|--|-------------------------|--|-------------------------|--|
| | | | | | | | | | | |


REMARKS: See Sheet No. 1.
(1) Contract not final but work substantially complete in 1951.
(2) Gravel Base from Mi. Pts. 702 to 1742 and 20.71 to 20.94.

PREPARED BY
TRAFFIC AND PLANNING DIVISION
IN COOPERATION WITH
U.S. DEPARTMENT OF COMMERCE
BUREAU OF PUBLIC ROADS


STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 5806
TRUNK HIGHWAY 89
COUNTY Roseau
2B

LINE S. Co. Line - Jct. T.H. 11 (Jct. T.H. 310) at Roseau
Ref. Pt. 103+00.388 - 125+00.302

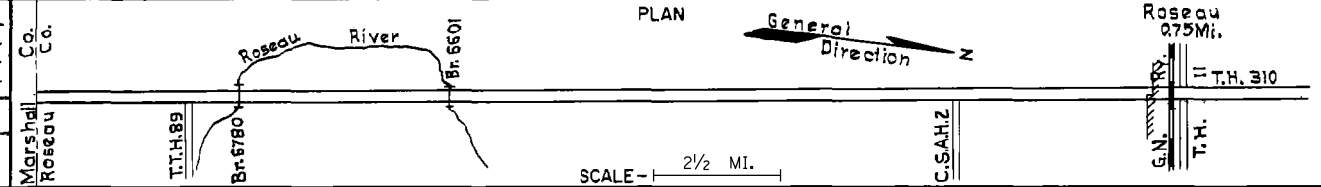

| YEAR BUILT | PROJECT NO. | DESCRIPTION | WIDTH | THICKNESS | REMARKS |
|------------|-----------------|---|--------------------|-------------------------|---|
| M 1964 | C | Light Bit. Seal | 35' | | RS-2K, 37953 Gal. Agg. 1356 C.Y. |
| C 1972 | -13 54009(G) | Turn Lanes | | | At Center St. At 3rd St. S.W. At Commercial Entr. |
| C 1975 | 6800-01 | PLATE BEAM GUARD RAIL AT BR. 6601, 6780 | | | 576 Lin. Ft. |
| C 1979 | 6800-03 | At 2 Locations Plate Beam Guardrail | | | 700 Lin. Feet |
| M 1981 | SF | Spot Bit. Surf. | | | 3.2 Miles 5916 Tons Bit. Mix |
| M 1983 | SF | Bit. Surfacing | 24' | 1 1/2" | Contract No. 3999 |
| M 1983 | SF | Shouldering (Aggregate) | 3' | 1 1/2" | 350 Ton |
| M 1984 | SF | Bit. Surfacing | 24' | 1 1/2" | 2,550 Ton Spec 2331 |
| C 1984 | 6806-14 | Grading B Bit. Surfacing B Bit. Shoulders | 4.7' 24' 10' | 14" 1 1/2" 1 1/2" | Bit. Spec. 2331 Bit. Spec. 2331 |
| M 1985 | M4111 | Bit. Surfacing Agg. Shoulders | 24' | 1 1/2" | Contract No. 4111 Sp. 2331 |
| C 1988 | 6806-15 | Bit. Overlay | 24' | 1 1/2" | Spec. 2331 |
| C 1993 | 6806-18 | Bit. Overlay Bit. Shoulders | 24' 2' | 2 1/2" Var. | Spec. 2331 Spec. 2331 |
| C 1998 | 6806-23 | Bit. Overlay | 24' | 1 1/2" | Spec. 2350 |
| C 2005 | 6806-27 | Spot Bit Milling & Bituminous Overlay | 28' 28' | 3" | Spec 2360 |

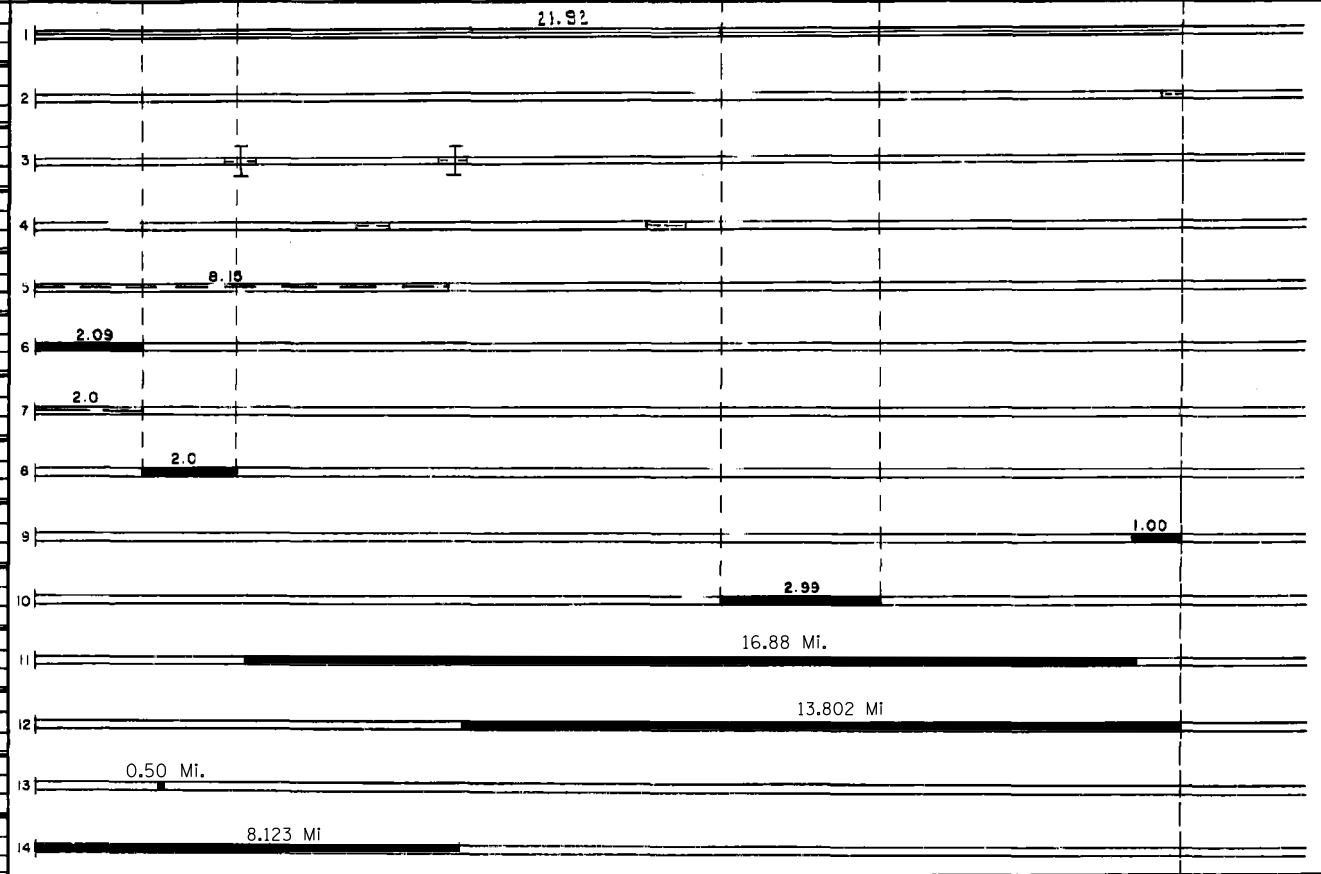

| YEARS FROM TO | | TOTAL MILES | UNINCORPORATED RDWY. MI. | | INCORPORATED RDWY. MI. | | RURAL BR. MI. | | URBAN BR. MI. | |
|---------------|--|-------------|--------------------------|--|------------------------|--|---------------|--|---------------|--|
| | | | | | | | | | | |

REMARKS See Sheet 1
FOR OTHER PROJECTS SEE DIST. NO. 2170

