
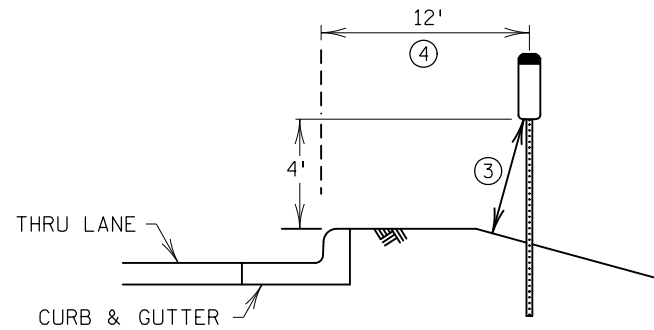


MARKER TYPICAL PLACEMENT

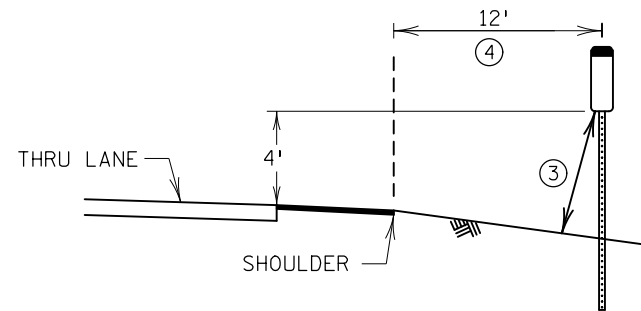

DELINEATOR TYPICAL PLACEMENT

NOTES:

- ① MARKER SHOULD BE PLACED AS CLOSE TO THE BEGINNING OF MEDIAN AS POSSIBLE.
- ② THE EDGE OF THE OBJECT MARKER THAT IS CLOSEST TO THE ROAD USER MUST BE PLACED IN LINE WITH THE CLOSEST EDGE OF THE OBSTRUCTION. STRIPES MUST BE ANGLED DOWNWARD TOWARDS THE SIDE TRAFFIC IS TO PASS THE OBSTRUCTION.
- ③ THE CRASHWORTHY HEIGHT FROM GROUND TO BOTTOM OF ANY PORTION OF THE SIGN PANEL IS AT LEAST 7 FEET FOR BREAKAWAY STRUCTURES AND AT LEAST 4 FEET FOR BENDABLE STRUCTURES. SEE SPECIFIC SQUARE TUBE BASE STRUCTURE PLAN FOR CRASH RESPONSE TYPE.
- ④ OFFSET TO BE ADJUSTED TO MATCH OTHER SIGN OFFSETS, BUT NOT MORE THAN 12 FEET OR LESS THAN 2 FEET.