


PLOT NAME: FIN BASE CORED THROUGH CONCRETE DETAIL  
 PATH & FILENAME: OTST\Signing\Typicals\Standard Plans\DETAIL Versions of Std Plans\FIN BASE CORED THROUGH CONCRETE DETAIL.dgn  
 PLOTTED/REVISED: 21-APR-2021

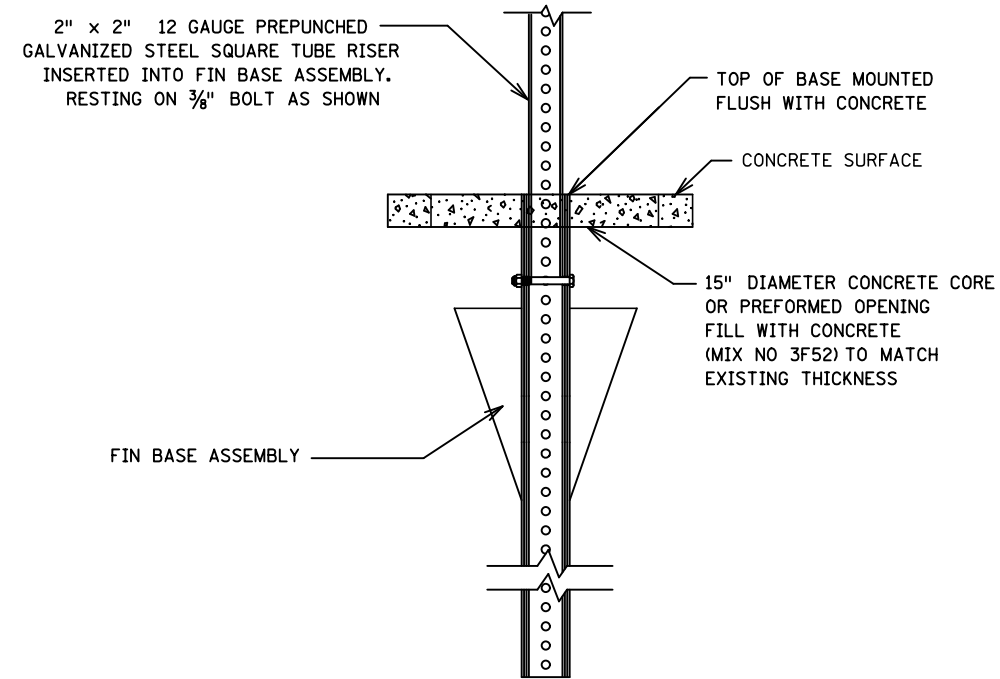

FIN BASE  
CORED THROUGH CONCRETE

NOTES:

1. THE CRASH RESPONSE TYPE FOR THIS STRUCTURE IS BENDABLE.
2. TO MEET CRASHWORTHY REQUIREMENTS THE DISTANCE BETWEEN THE BOTTOM OF THE SIGN PANEL AND THE GROUND SURFACE BELOW ANY PORTION OF THE SIGN PANEL MUST BE A MINIMUM OF 4 FEET. SEE TABULATIONS FOR MOUNTING HEIGHT.
3. FOR SIGN PANEL MOUNTING DETAILS SEE SQUARE TUBE SIGN MOUNTING DETAILS.
4. SQUARE TUBE SIGN POSTS PER MNDOT SPEC. 3402.

REV 4/20/21

**FIN BASE**  
CORED THROUGH CONCRETE