ATP 8 Area Transportation Improvement Program (ATIP) 2019—2022

DEPARTMENT OF TRANSPORTATION

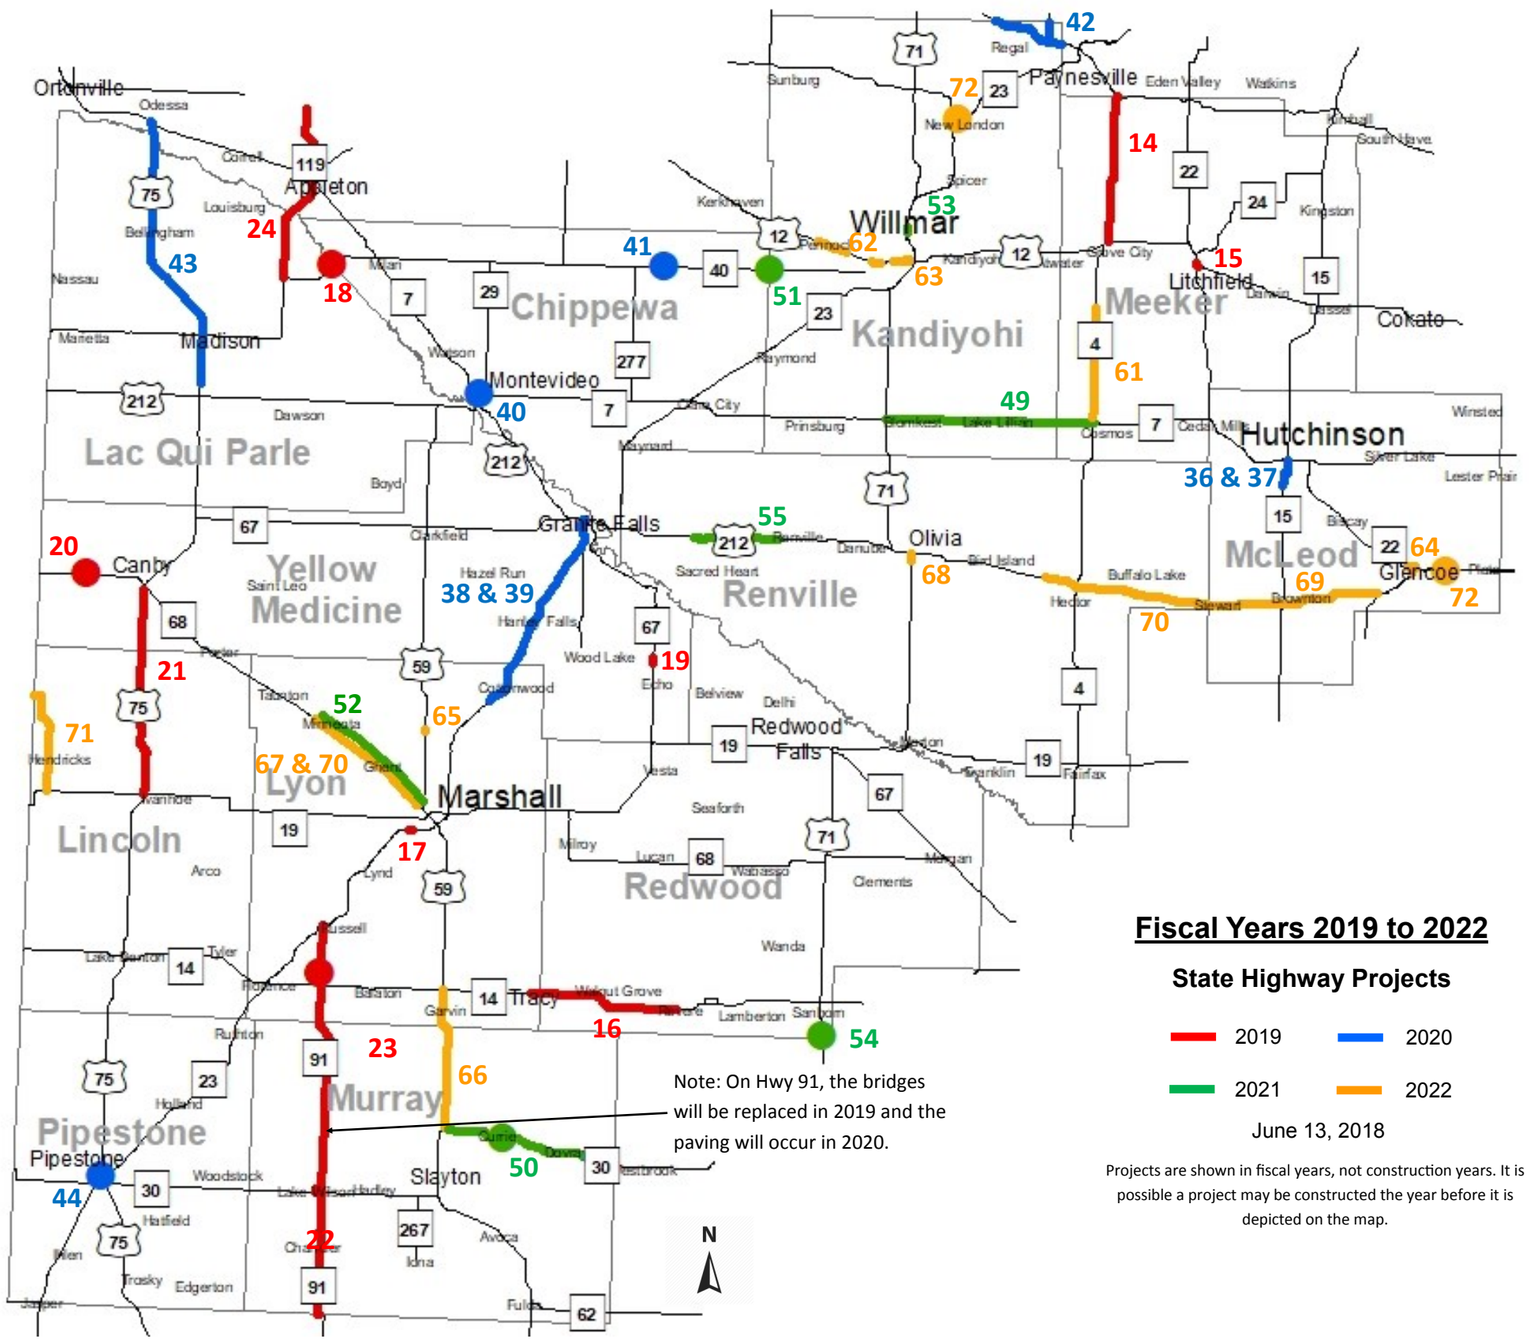

2019	Hwy	Project Description
14	MN 4	Micro mill and ultra thin from US 12 to MN 55
15	US 12	Downtown reconstruction in Litchfield from 4th Street to Holcombe Ave., plus work on MN 22
16	US 14	Cold in-place recycle (CIR) and medium mill and overlay, plus chip seal from 4th Street in Tracy to CSAH 7 in Revere
17	MN 23	Reduced conflict intersection (J-turn) at CSAH 7 and Hwy 23
18	MN 40	Replace bridge #5380 (Milan Bridge) over Lac qui Parle Lake/Minnesota River, 3 miles W. of Milan
19	MN 67	Replace bridges #91176 &#5641 over Boiling Spring Creek north of Echo
20	MN 68	Replace bridge #5432 over Lazarus Creek, 3.6 miles west of Canby
21	US 75	2" mill and overlay from MN 19 in Ivanhoe to Canby, plus work on MN 68 in Canby from Maple Ave. SE to near Custer Ave. N
22	MN 91	2" mill and overlay from the Murray/Nobles County line to MN 30 in Lake Wilson, plus replace bridges #6753 over the Chanarambie Creek, #8759 over a ditch and #6754 over a ditch
23	MN 91	2" mill and overlay from MN 30 in Lake Wilson to MN 23, plus replace bridge #9094 over a ditch
24	MN 119	3" mill and overlay from MN 40 to US 12, except in Appleton
2020	**Hwy**	**Project Description**
36	MN 15	Downtown reconstruction in Hutchinson from 5th Ave. SW to 2nd Ave. NE
37	MN 15	Bonded wearing course (BWC) and ADA from CSAH 115 (roundabout) to 5th Ave. SE in Hutchinson
38	MN 23	Mill 3" and 7" concrete overlay from near CSAH 24 in Cottonwood to US 212 in Granite Falls, plus replace bridges #91419, #91420 & #91459, panels on #87007, ADA in Granite Falls and turn lanes
39	MN 23	Construct left turn lanes at Lyon CSAH 9 and 10
40	MN 29	Replace bridge #9287 over a Montevideo City street
41	MN 40	Replace bridge #6864 over a County ditch 2.4 miles east of MN 277
42	MN 55/4	3" mill and overlay on MN 55 & MN 4 in the northeast corner of Kandiyohi County
43	US 75	3" cold in place recycle (CIR) and 2" overlay from Township 127 to MN 7, except in Madison, plus ADA in Bellingham, culvert liners, RR crossing in Bellingham and guardrail
44	US 75	Replace bridge #6572 with new bridge #59011 just north of the junction with MN 23 in Pipestone
2021	**Hwy**	**Project Description**
49	MN 7	Ultra thin bonded wearing course (UTBWC) from US 71 to MN 4 in Cosmos
50	MN 30	2.5" mill and overlay from near US 59 to the Murray/Cottonwood County line, plus scarify & low slump overlay on bridge #6782 over the Des Moines River
51	MN 40	Replace bridge # 91681 over a ditch just east of the Chippewa/Kandiyohi County line
52	MN 68	Shoulder widening from Minneota to Marshall, replace 4 bridges and culverts
53	US 71	Reduced conflict intersection (J-turn) on US 71 and Kandiyohi CR 90, just north of Willmar
54	US 71	Replace bridge #5543 over the Cottonwood River 2.8 miles south of US 14 near Sanborn
55	US 212	Un-bonded concrete overlay from 2.3 miles east of MN 23 to Renville, plus urban reconstruction in Sacred Heart
2022	**Hwy**	**Project Description**
61	MN 4	Reclaim and overlay from Cosmos to Township 243/451 in Meeker County
62	US 12	3" mill and overlay from just east of Kandiyohi CSAH 1 to just east of Kandiyohi CSAH 5
63	US 12	Medium mill and overlay from 6th Street to 24th Street in Willmar
64	MN 22	Medium mill and overlay from US 212 to Cedar Ave. in Glencoe, plus ADA
65	US 59	Replace bridges #8886 and #8887 over a stream and ditch crossing 5.6 miles north of Marshall
66	US 59	Major concrete pavement rehab (CPR) and diamond grinding, plus reclaim shoulders from just north of the north junction of MN 30 to US 14
67	MN 68	Ultra thin bonded wearing course (UTBWC) from Minneota to Marshall
68	US 71	Medium mill and overlay from Viking Drive to US 212 in Olivia, plus ADA
69	US 212	Ultra thin bonded wear course (UTBWC) on US 212 from just east of Renville CSAH 16 to the west junction of MN 22, east of Glencoe
70	US 212/ MN 68	Hot in place recycle (HIR) on US 212 from just east of Renville CSAH 16 to McLeod CSAH 7 in Stewart and HIR on MN 68 from Minneota to Marshall
71	MN 271	Reclaim and overlay on MN 271 from MN 19 to Railroad Street in Hendricks and thin mill and overlay on MN 271 from Maple Street in Hendricks to the State line
72	MN 212	Construct a reduced conflict intersection at US 212 and McLeod CSAH 1 to the east of Glencoe
73	MN 23	Construct a reduced conflict intersection at MN 23 and MN 9 in New London

For more information, contact: Lindsey Bruer |MnDOT District 8 | Planning Director | lindsey.bruer@state.mn.us | 320-214-6333