


PREPARED BY
HIGHWAY PLANNING SURVEY
IN COOPERATION WITH
U.S. PUBLIC ROADS ADMINISTRATION


STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 2318
TRUNK HIGHWAY 80
COUNTY Fillmore
DISTRICT 6A

LIMITS: Jct.T.H.16 So. of Wykoff - Jct.T.H.52 at Fountain

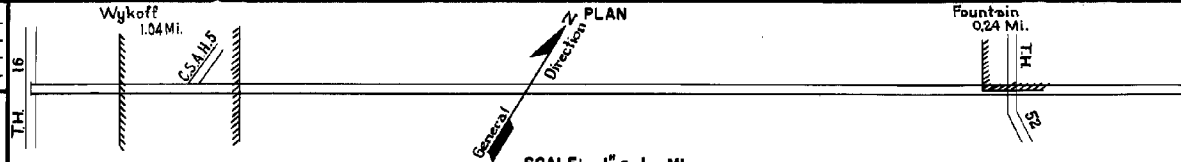

YEAR BUILT	PROJECT N°	DESCRIPTION			CODE N°
		TYPE	WIDTH	THICKNESS	
1936	16-9-39E	Grading Crushed Stone (Waterbound)	32' 29'	6"	
1937	A.F.E. 19	Mixed Bit.	29'	1"	
1938	2302-01 16-9-39F	Grading Concrete Seeding	32' 20'	9-7-9	
M 1942	A.F.E. 12	Spot Treat Bit. Surf. Repair	20'		Rd. Oil 452 Gal./Mi. Agg. 20 C.Y./Mi.
M 1943	A.F.E. 4	Bit. Surf. Repair	40'		RT-526, 12707 Gal./M Agg. 513 C.Y./Mi.
C 1943	2302-02	Landscape & Curbing			N.Y.A.
M 1945	A.F.E. 23 A.F.E. 5	Spot Treat Bit. Surf. Repair			Bit 3159 Gal./Mi. Agg. 238 C.Y./Mi.
M 1946	A.F.E. 4	Spot Treat Bit. Surf. Repair	24'		MC-3, 18710 Gal. Agg. 927 C.Y.
M 1947	A.F.E. 4	Spot Treat Bit. Surf. Repair	24'		MC-3, 34389 Gal. Agg. 1452 C.Y.
M 1948	A.F.E. 4	Spot Treat Bit. Surf. Repair Spot Fog Seal	24'		Bit 45094 Gal. Agg. 2052 C.Y.
M 1949	A.F.E. 4	Spot Treat Bit. Surf. Repair & Spot Fog Seal	24'		MC-3, 46048 Gal. Agg. 2399 C.Y.
C 1949	2318-04	Concrete	22'	9-7-9	
M 1950	A.F.E. 19 A.F.E. 4	Spot Base Repair Rotator Bit. Surf. Spot Fog Seal	24'		MC-3, 31014 Gal. Agg. 1997 Tons Agg. 65 C.Y.
M 1952	A.F.E. 4	Spot Treat Bit. Surf. Repair and Seal	24'		MC-3 & RC-2, 5987 Gal. Agg. 246 C.Y.

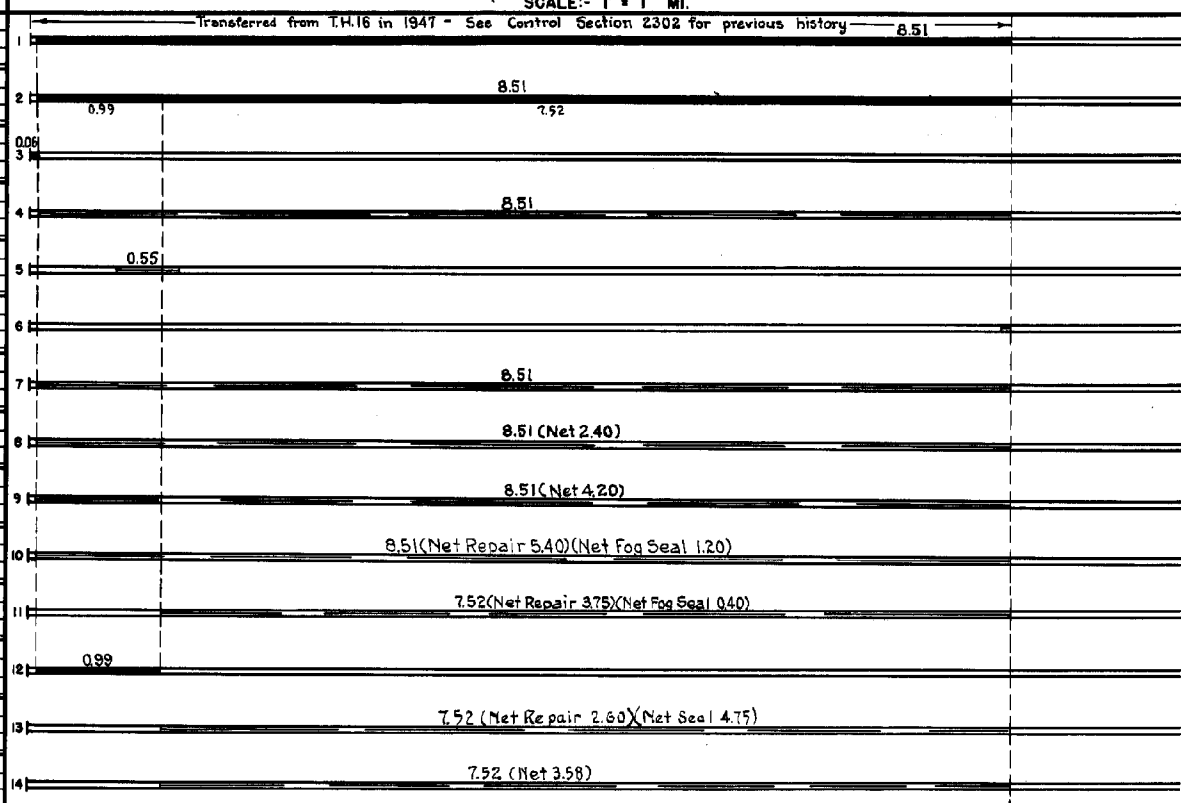


YEARS		TOTAL MILES	UNINCORPORATED		INCORPORATED		RURAL		URBAN		REMARKS: Layout is to scale as of 1947
FROM	TO		ROWY. MI.	BR. MI.	ROWY. MI.	BR. MI.	ROWY. MI.	BR. MI.	ROWY. MI.	BR. MI.	
1947	1948	8.57	7.04	0.00	1.53	0.00	8.57	0.00	0.00	0.00	
1949		8.57	7.29	0.00	1.28	0.00	8.57	0.00	0.00	0.00	

PREPARED BY
HIGHWAY PLANNING SURVEY
IN COOPERATION WITH
U.S. PUBLIC ROADS ADMINISTRATION

STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 2318
TRUNK HIGHWAY 80
COUNTY Fillmore
DISTRICT 6A

LIMITS: Jct. T.H. 16 S. of Wykoff - Jct. T.H. 52 at Fountain

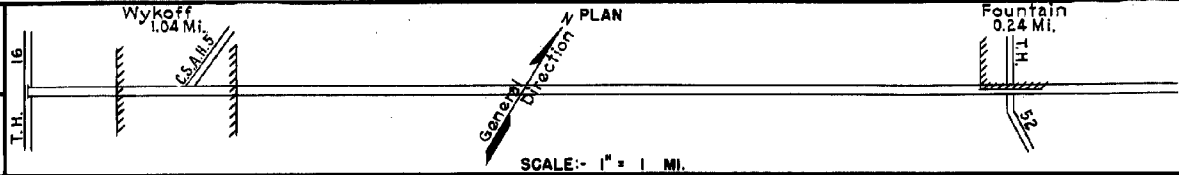

YEAR BUILT	PROJECT N°	DESCRIPTION			CODE N°	T.H.	MILES
		TYPE	WIDTH	THICKNESS			
M 1953	A.F.E. 605	Light Bit. Seal	24'		RCS-2 7919 Gal. Agg. 300 C.Y.	1	4.75
M 1954	A.F.E. 604	Spot Seal Coat	24'		RCS-1, 3768 Gal. Agg. 126 Tons	2	7.52 (Net 2.42)
M 1955	A.F.E. 605	Light Bit. Seal	24'		MC-2, 4012 Gal. Agg. 227 Tons	3	7.52 (Net 3.48)
M 1957	A.F.E. 605	Bit. Seal Coat	24'		RCS-1, 21708 Gal. Agg. 692 C.Y.	4	7.52
M 1958	A.F.E. 604	Spot Treat Bit. Surf. Repair	24'		Bit. 8392 Gal. Agg. 656 Tons	5	7.52 (Net 1.35)
M 1959	A.F.E. 604	Spot Treat Bit. Surf. Repair	24'	3/4"	SC-3, 19543 Gal. Agg. 1516 Tons	6	7.52 (Net 2.92)
M 1960		Spot Treat Bit. Surf. Repair Light Bit. Seal	24'		9370 Gal Bit. Mat'l Agg. 1247 Tons RCS-1, 16484 Gal.	7	7.52 (Net Repair 1.61) (Net Seal 6.02)
M 1962		Spot Treat Bit. Surf. Repair	24'		Bit. Mix 398 Tons Tack MC-2, 672 Gal.	8	7.52 (Net 0.85)
M 1963		Spot Treat Bit. Surf. Repair Light Bit. Seal	24'		Bit. Mix 281 Tons RC-2, 10948 Gal. Agg. 295 C.Y.	9	7.52 (Net Repair 0.80) (Net Seal 5.55)
M 1964	SF	Spot Treat Bit. Surf. Repair	24'		Bit. Mix 278 Tons MC-2 Tack 500 Gal.	10	7.15 (Net 0.42)
M 1965	SF	Spot Light Seal Spot Treat Bit. Surf. Repair	24'		Seal Bit. 4530 Gal. Seal Agg. 164 C.Y. Bit. Mix 391 Tons	11	7.52 (Net Repair 1.07) (Net Seal 2.29)
M 1966	SF	Bit. Surf. Repair Light Bit. Seal	24'	3/4"	Bit. Mix 183 Ton RC-250 Bit. 5094 Gal. FA-1 Agg. 91 C.Y.	12	8.57 (Net Repair 0.84) (Net Seal 1.33)
M 1967	SF	Bit. Surf. Repair	24'		RC-250 Tack 500 Gal. Bit. Mix 346 Ton	13	8.57 (Net 1.16)
M 1968	SF	Bit. Surf. Repair			RC-250, MC-250, 1828 Gals. Agg. 456 Ton	14	8.57 (Net Repair 1.80)

YEARS FROM TO		TOTAL MILES	UNINCORPORATED		INCORPORATED		RURAL		URBAN	
FROM	TO		RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.


REMARKS: See Sheet No. 1

PREPARED BY
TRAFFIC AND PLANNING DIVISION
IN COOPERATION WITH
U.S. DEPARTMENT OF COMMERCE
BUREAU OF PUBLIC ROADS


STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 2318
TRUNK HIGHWAY 89
COUNTY Fillmore
DISTRICT 6A

LIMITS: Jct. T.H. 16 S. of Wykoff - Jct. T.H. 52 at Fountain
Ref. Pt. 000+00.000 - 008+00.443

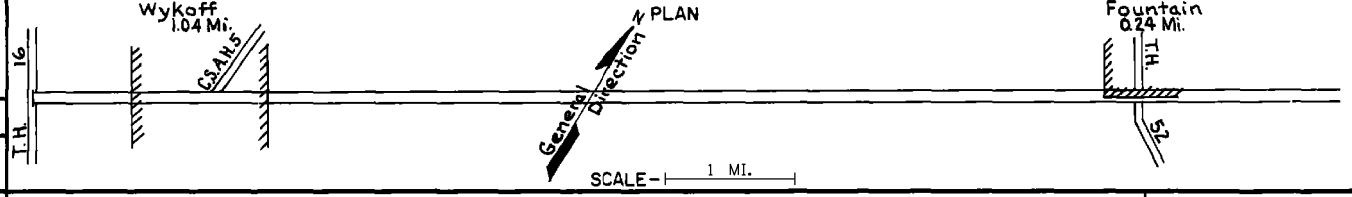

YEAR BUILT	PROJECT NO.	DESCRIPTION			
		TYPE	WIDTH	THICKNESS	REMARKS
M 1969	SF	Spot Bit. Repair	24'	1/2"	MC-250 Tack 2300 Gal. Agg. 1022 Tons
M 1970	SF	Spot Bit Repair	24'	1/2"	Tack-2380 Gal. Agg. 472 Tons
M 1971	SF	Seal Coat	11'-22'		RC-800 17,649 Gal. Agg. 381 C.Y.
M 1972	SF	Spot Surf. Repair	24'	1"	MC-300 Gal. Agg. 274 Tons
M 1973	SF	Bit. Surface Repair	24' 42'	1"	Tack 1500 Gal. Agg. 238 Ton
C 1979	2318-06	GRADING P/Mix Base & Surface RS 4 1/2(2) Gravel Shoulders	24'	3 1/2"	
M 1980	SF	Bit. Overlay	22'	2 1/4"	Tack .03 565.49 Ton
M 1991	SF	Bit. Overlay	24'	2"	Spec. 2331
C 1995	2318-10	Bit. Overlay Gravel Shoulder	24' 7'	Var. Var.	Spec. 2341 Class 2
M 1997	M97066	Crack Repair			
2013	2318-12	Milling Bit. Overlay	Var.	2' 2'	Spec. 2360

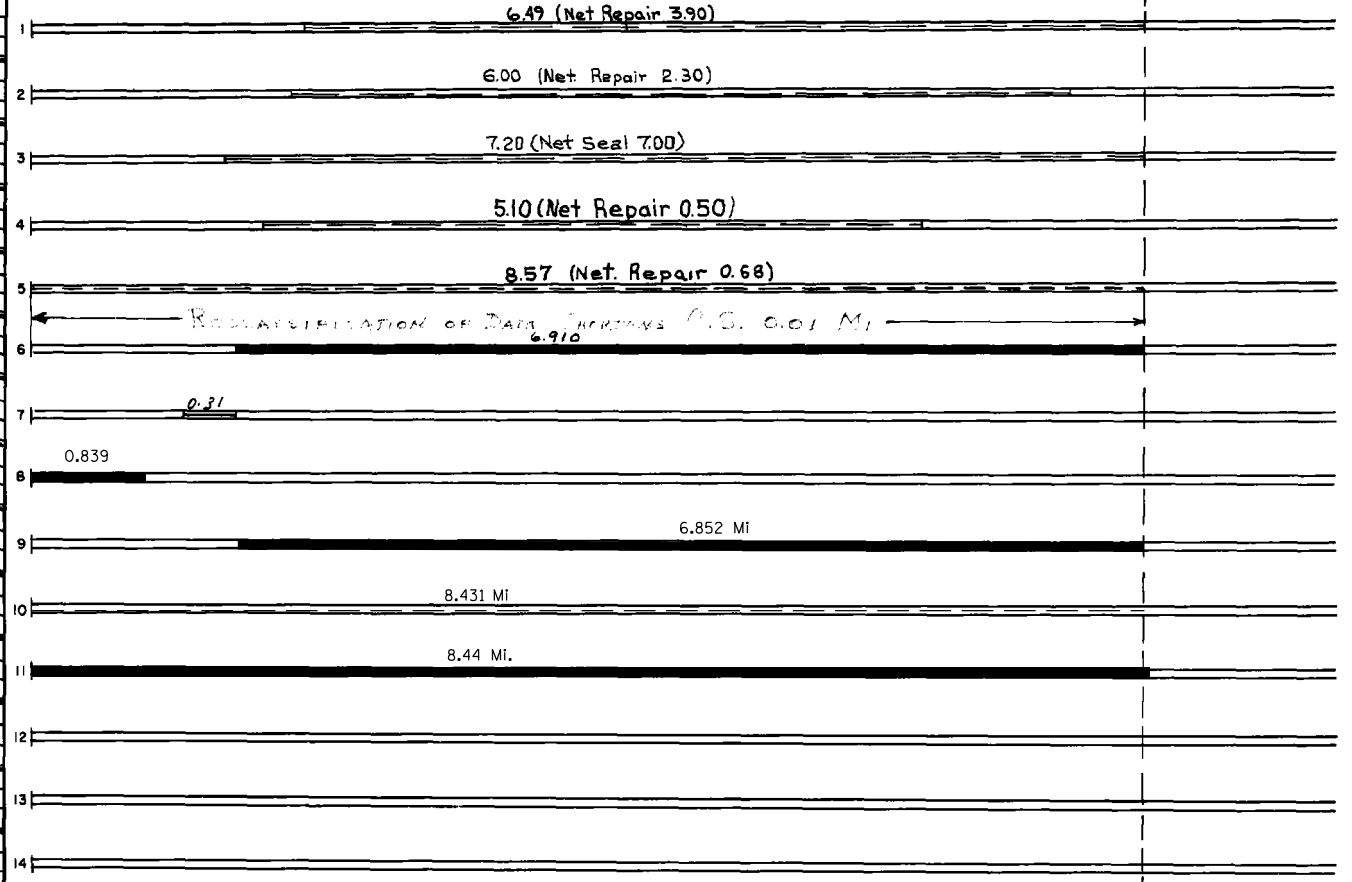

YEARS		TOTAL MILES	UNINCORPORATED		INCORPORATED		RURAL		URBAN	
FROM	TO		RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.

REMARKS: See Sheet No. 1